




SPECIFICATION CONTROL DRAWING Crystal Resonator

FREQUENCY
16.000000MHz

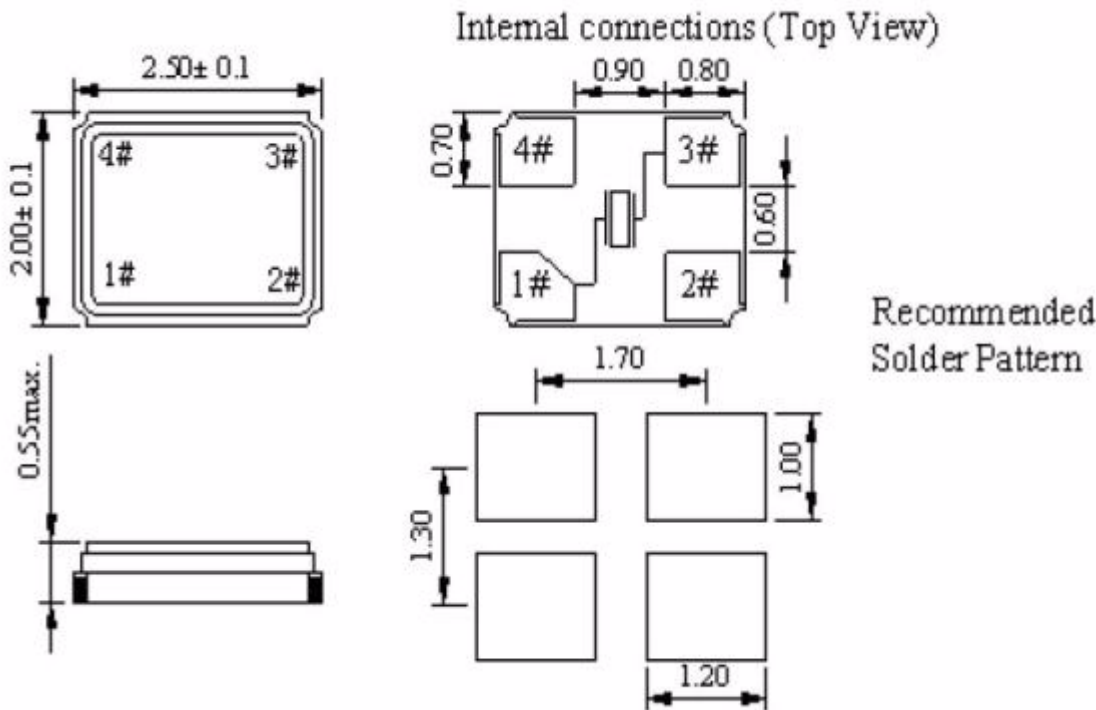

Holder Style	25x2x05 4-pad
Mode	Fundamental
Adjustment Tolerance	$\pm 20\text{PPM}$ at 25°C
Temperature Stability	$\pm 20 \text{ PPM}$
Operating Temp. Range	-40°C to $+85^{\circ}\text{C}$
Load Capacitance	8 pF
ESR	60 Max Ohm
Static Capacitance (C0)	Unspecified pF
Ageing	$\pm 3\text{ppm}$ 1st Year Max
Marking	AEL16.0 ww/yy

Amdt Date	Change Note	AEL Code
		X16M000000S207
		Issue Ref A