




**SPECIFICATION
CONTROL DRAWING
Crystal Resonator**

FREQUENCY	
16.000000MHz	

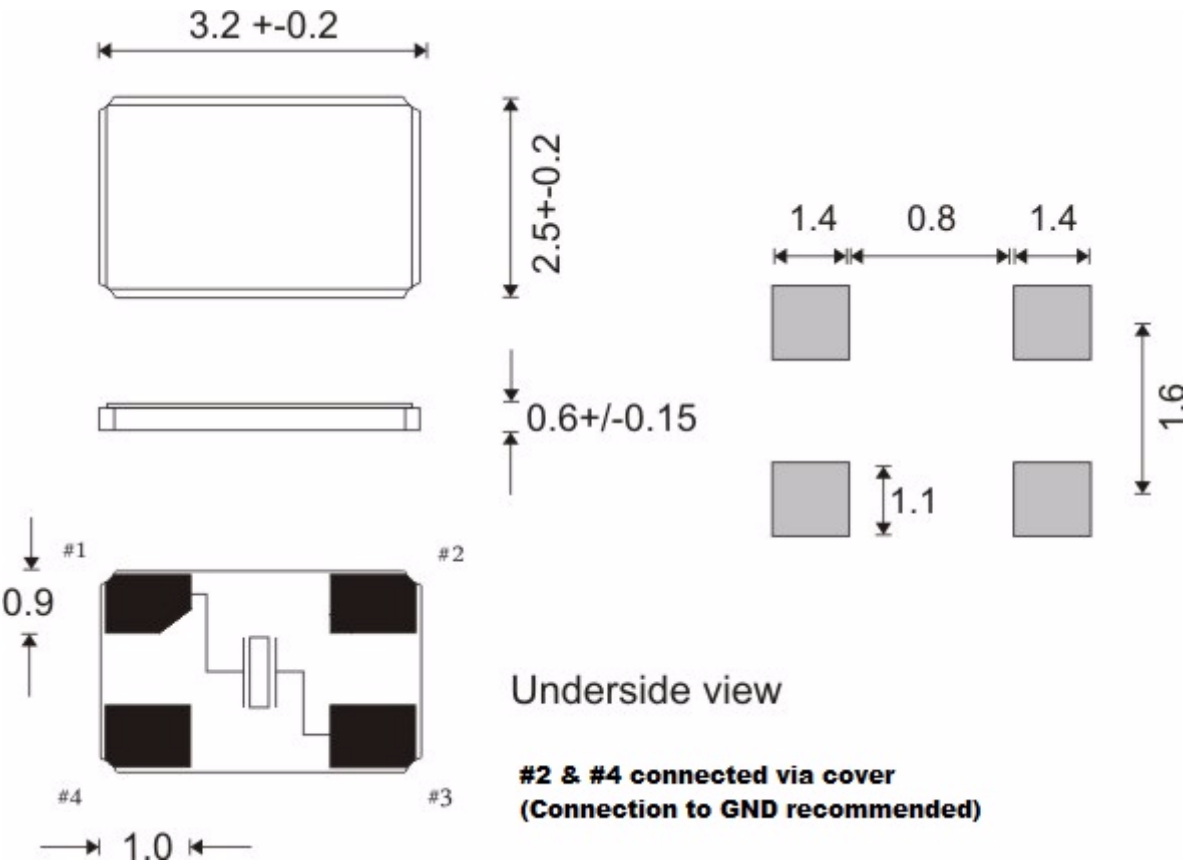

Holder Style	3X25X06 4-Pad
Mode	Fundamental
Adjustment Tolerance	± 10PPM at 25°C
Temperature Stability	± 20 PPM
Operating Temp. Range	-40°C to +85°C
Load Capacitance	9 pF
ESR	80 Ohm
Drive Level	0.1 mW
Static Capacitance (C0)	As Typ. pF
Dynamic Capacitance (C1)	As Typ. fF
Ageing	+/-3ppm/year
Marking	AEL16 WWYY

Amdt	Date	Change Note	AEL Code	
		Generic version of X16MS105	X16M000000S309	
			Issue Ref	A