

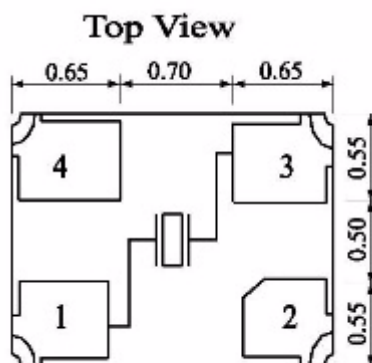


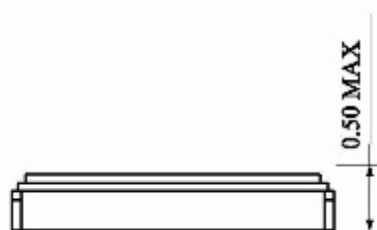


SPECIFICATION CONTROL DRAWING Crystal Resonator

FREQUENCY

24.000000MHz

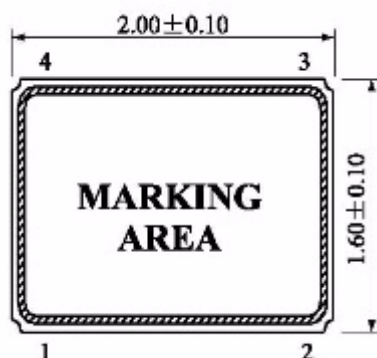

Recommended Solder Pattern

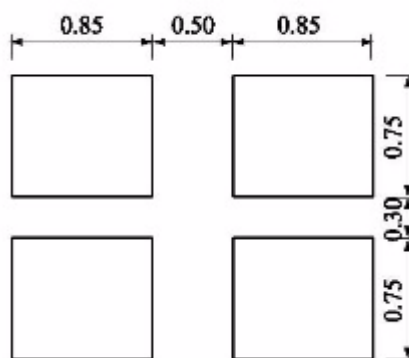

Holder Style
Mode
Adjustment Tolerance
Temperature Stability
Operating Temp. Range
Load Capacitance
ESR
Static Capacitance (C0)
Ageing
Marking

2x16x05 4-pad
Fundamental
± 15PPM at 25°C
± 20 PPM
-40°C to +85°C
8 pF
50 Max Ohm
Unspecified pF
+/-3ppm/Yr Max
AEL
WWYY

Amdt Date	Change Note	AEL Code	
6 DEC 11	ESR Updated	X24M000000S076	
16 JUN 16	Package Updated	Issue Ref	C