




**SPECIFICATION
CONTROL DRAWING
Crystal Resonator**

FREQUENCY	
25.000000MHz	

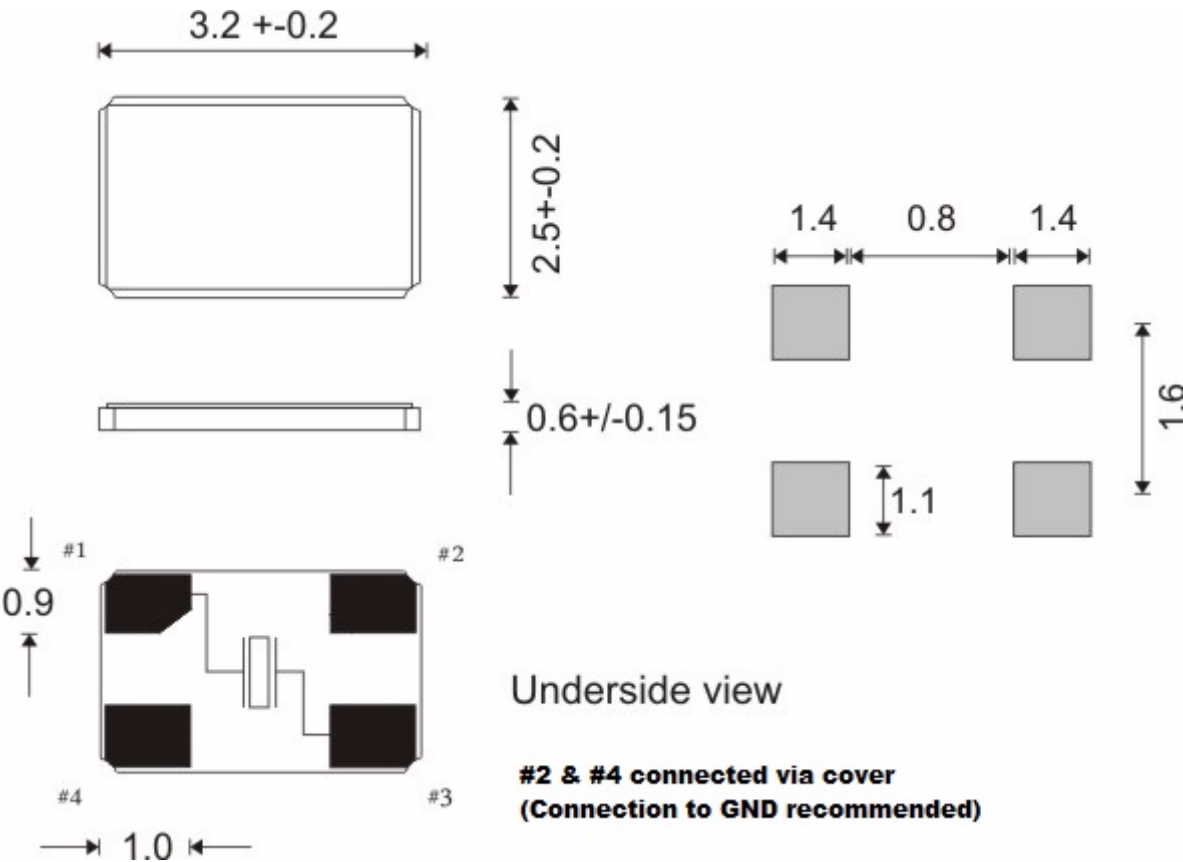

Holder Style	3X25X06 4-Pad
Mode	Fundamental
Adjustment Tolerance	± 30PPM at 25°C
Temperature Stability	± 50 PPM
Operating Temp. Range	-10°C to +60°C
Load Capacitance	18 pF
ESR	80 Ohm
Ageing	+/-2.0ppm 1st YR Max
Marking	AEL25.000WW/YY

Amdt	Date	Change Note	AEL Code	
			X25M000000S099	
			Issue Ref	B