




**SPECIFICATION
CONTROL DRAWING
Crystal Resonator**

FREQUENCY
25.000000MHz

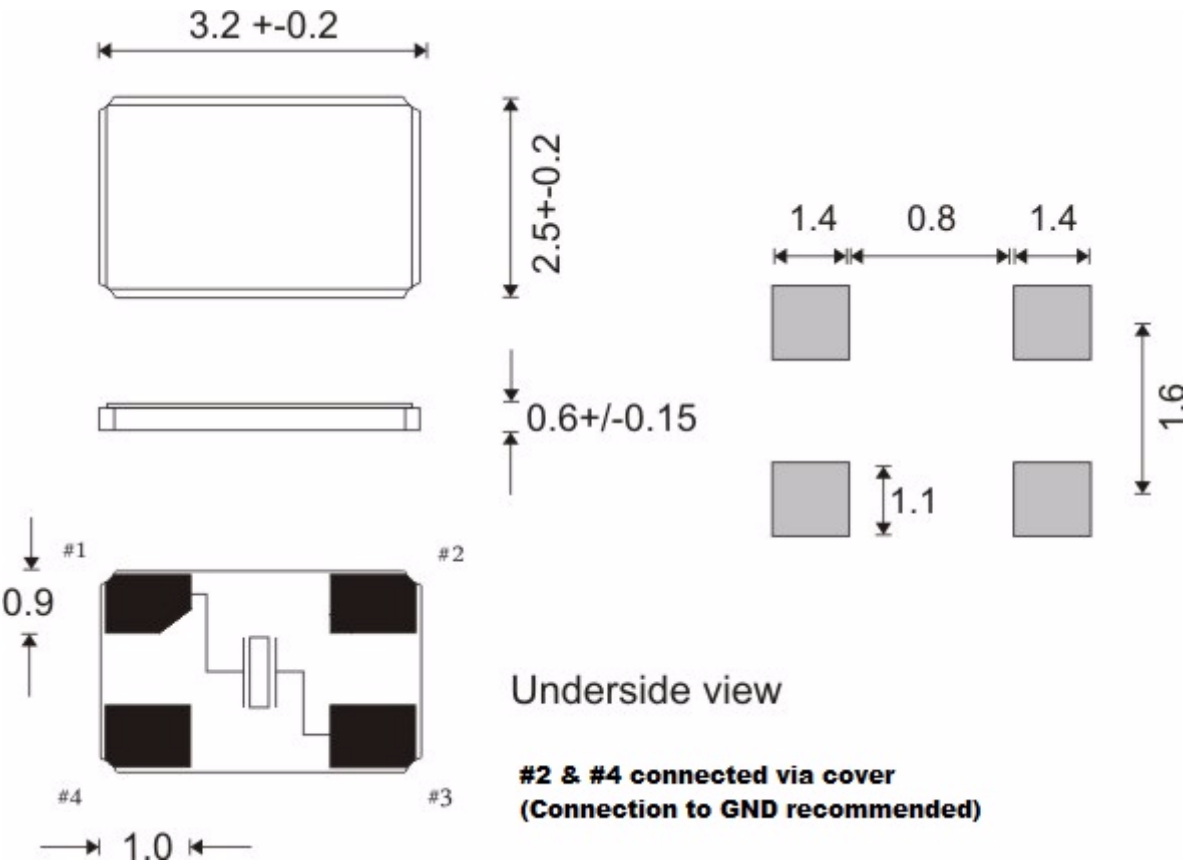

Holder Style	3X25X06 4-Pad
Mode	Fundamental
Adjustment Tolerance	± 30PPM at 25°C
Temperature Stability	± 50 PPM
Operating Temp. Range	0°C to +70°C
Load Capacitance	18 pF
ESR	50 Max Ohm
Static Capacitance (C0)	Unspecified pF
Ageing	+/-5.0ppm 1st YR Max
Marking	AEL25.000 ww/yy

Amdt Date	Change Note	AEL Code
1 FEB 17	ESR reduced to 50 Ohms Max	X25M000000S123
		Issue Ref B