




**SPECIFICATION
CONTROL DRAWING
Crystal Resonator**

FREQUENCY	
26.000000MHz	

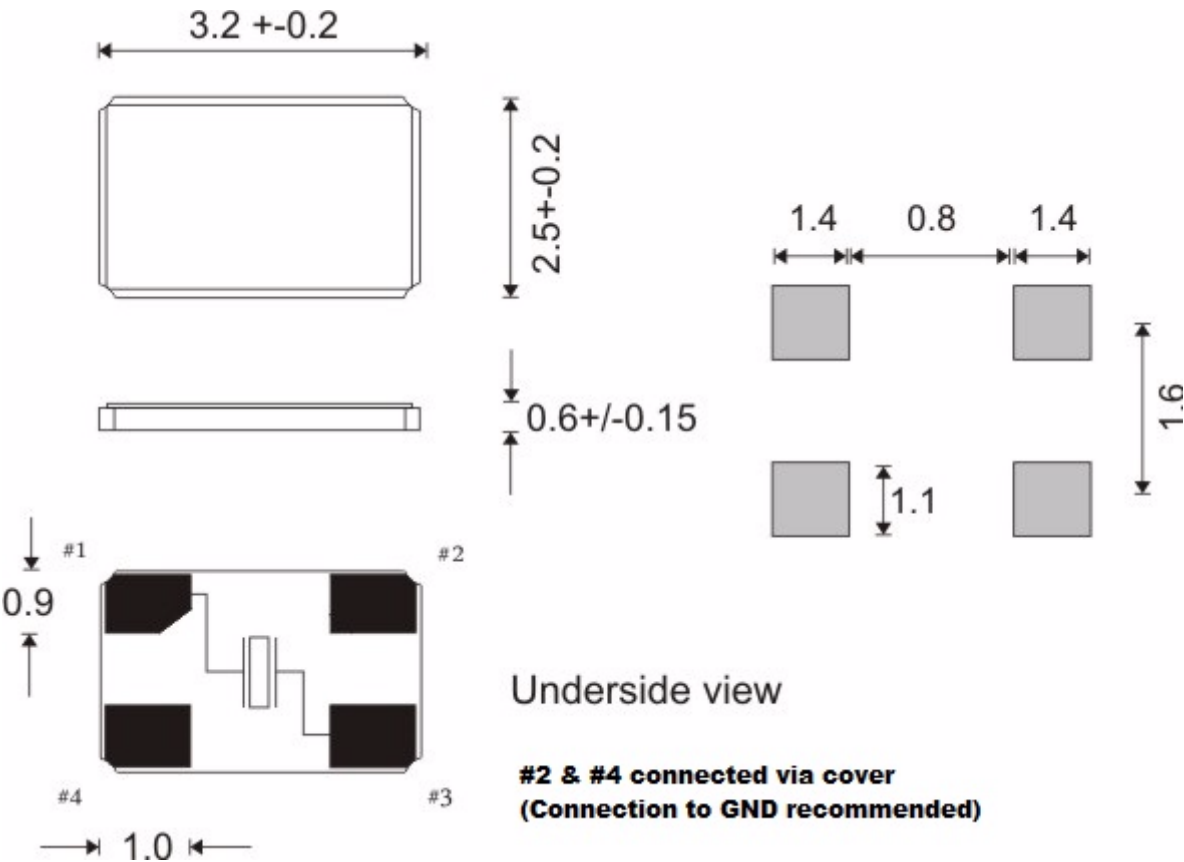

Holder Style	3X25X06 4-Pad
Mode	Fundamental
Adjustment Tolerance	± 10PPM at 25°C
Temperature Stability	± 10 PPM
Operating Temp. Range	-30°C to +85°C
Load Capacitance	10 pF
ESR	50 Max Ohm
Static Capacitance (C0)	Unspecified pF
Ageing	+/-3ppm 1st Year
Marking	AEL26.0 ww/yy

Amdt	Date	Change Note	AEL Code	
			X26M000000S306	
			Issue Ref	A