




**SPECIFICATION
CONTROL DRAWING
Crystal Resonator**

FREQUENCY
32.000000MHz

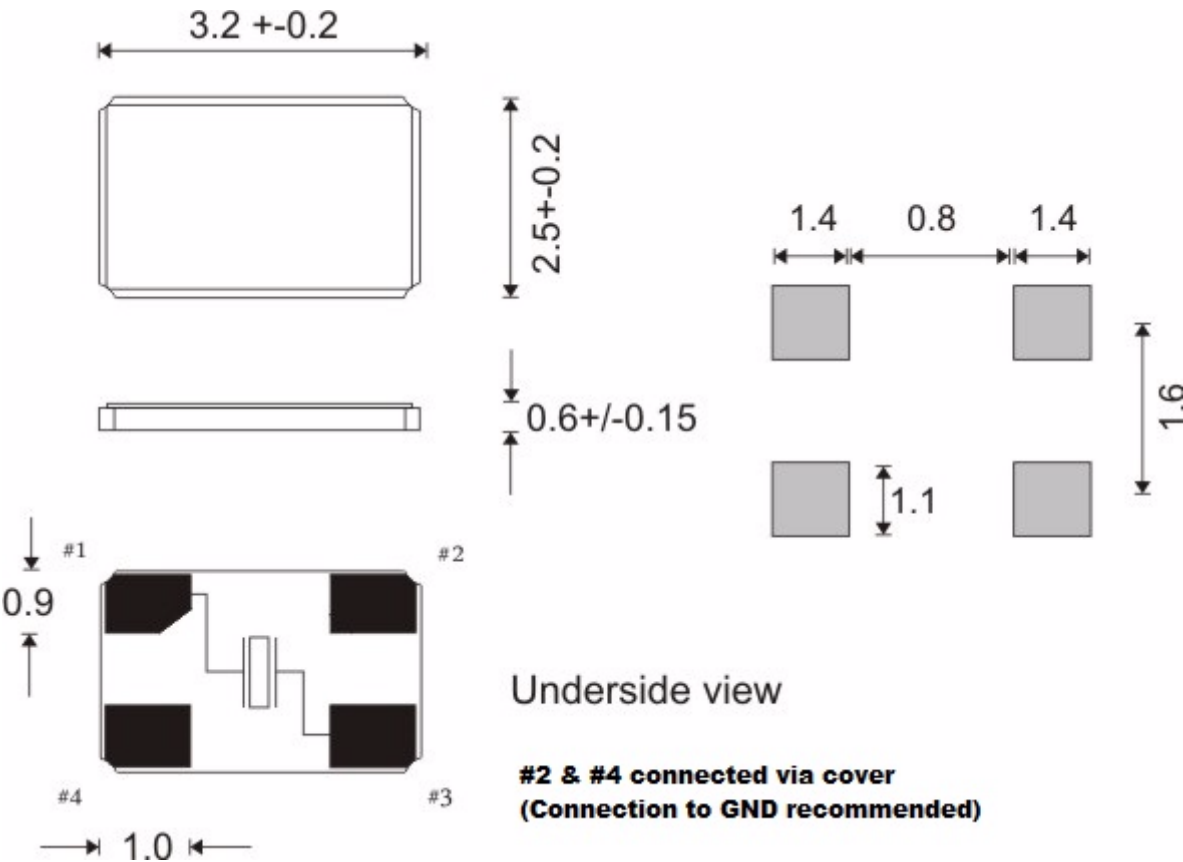

Holder Style	3X25X06 4-Pad
Mode	Fundamental
Adjustment Tolerance	± 10 PPM at 25°C
Temperature Stability	± 15 PPM
Operating Temp. Range	-40°C to +85°C
Load Capacitance	9 pF
ESR	40 Ohm
Ageing	+/-2ppm 1st YR Max
Marking	AEL32.000 WW/YY

Amdt Date	Change Note	AEL Code	
8 JUN 09	Tolerance added to height dimension	X32M000000S025	
		Issue Ref	B