




**SPECIFICATION
CONTROL DRAWING**
Crystal Resonator

FREQUENCY	
38.400000MHz	

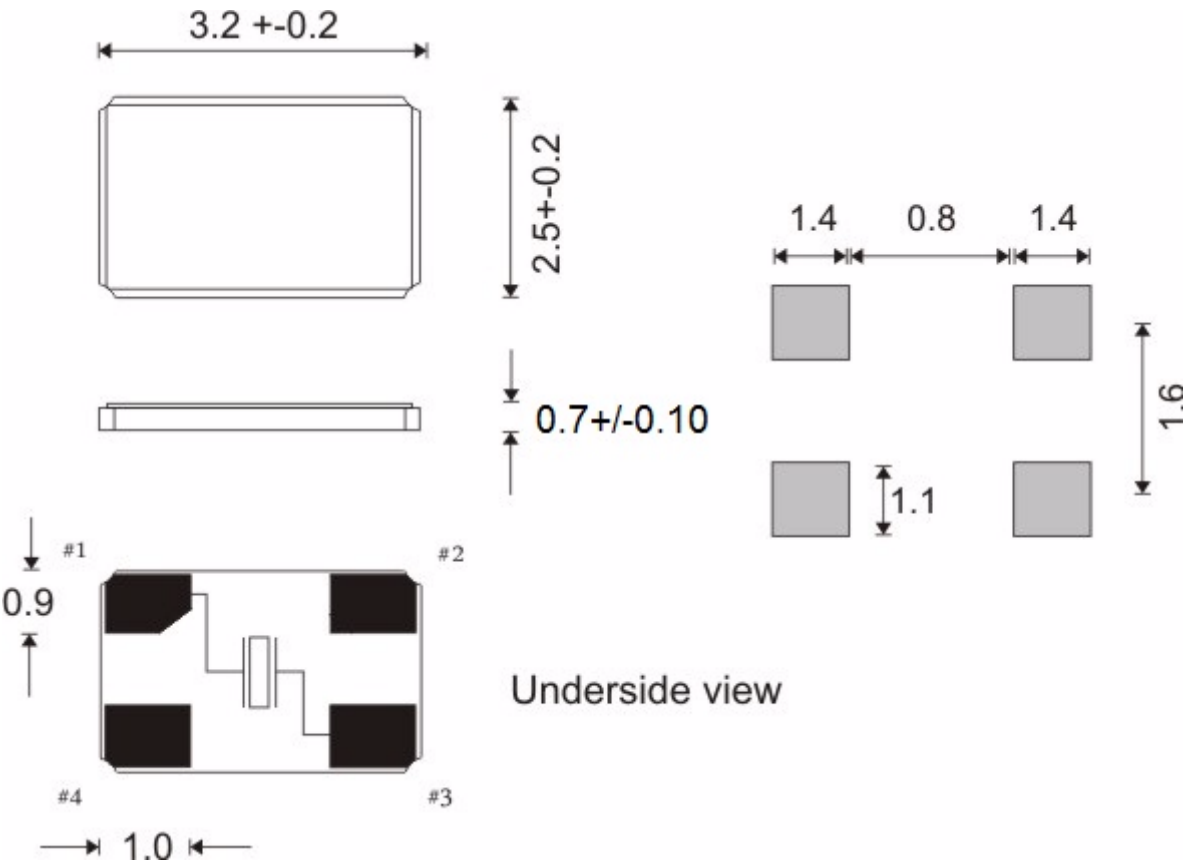

Holder Style	3X25X06 4-Pad
Mode	Fundamental
Adjustment Tolerance	± 10PPM at 25°C
Temperature Stability	± 25 PPM
Operating Temp. Range	-40°C to +85°C
Load Capacitance	10 pF
ESR	50 Max Ohm
Static Capacitance (C0)	Unspecified pF
Ageing	+/-3ppm 1st Year Max
Marking	AEL38.400 ww/yy

Amdt	Date	Change Note	AEL Code	
			X38M400000S005	
			Issue Ref	A