




**SPECIFICATION
CONTROL DRAWING
Crystal Resonator**

FREQUENCY
40.000000MHz

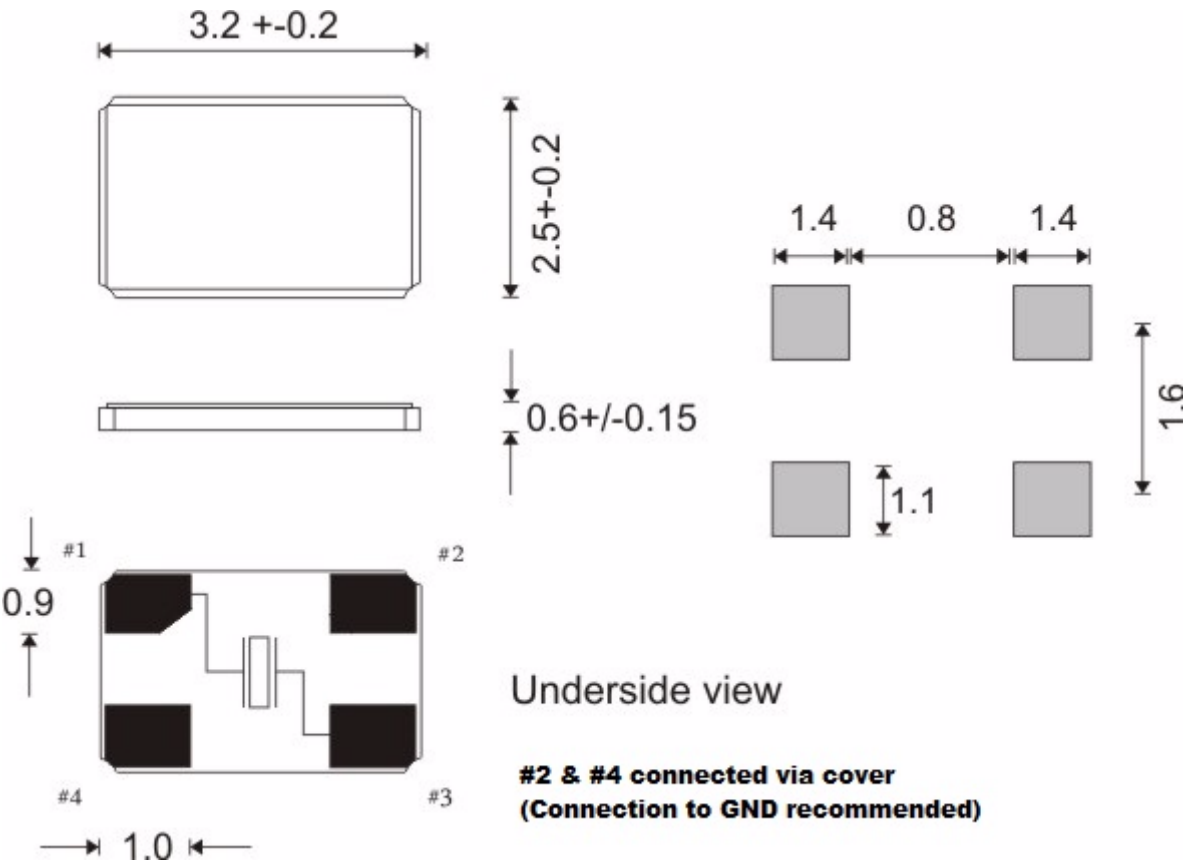

Holder Style	3X25X06 4-Pad
Mode	Fundamental
Adjustment Tolerance	$\pm$ 10PPM at 25°C
Temperature Stability	$\pm$ 10 PPM
Operating Temp. Range	-30°C to +85°C
Load Capacitance	10 pF
ESR	60 Max Ohm
Static Capacitance (C0)	Unspecified pF
Ageing	+/-3ppm 1st YR Max
Marking	AEL40.0 WWYY

Amdt	Date	Change Note	AEL Code
			X40M000000S302
			Issue Ref
			A