




**SPECIFICATION
CONTROL DRAWING
Crystal Resonator**

FREQUENCY
48.000000MHz

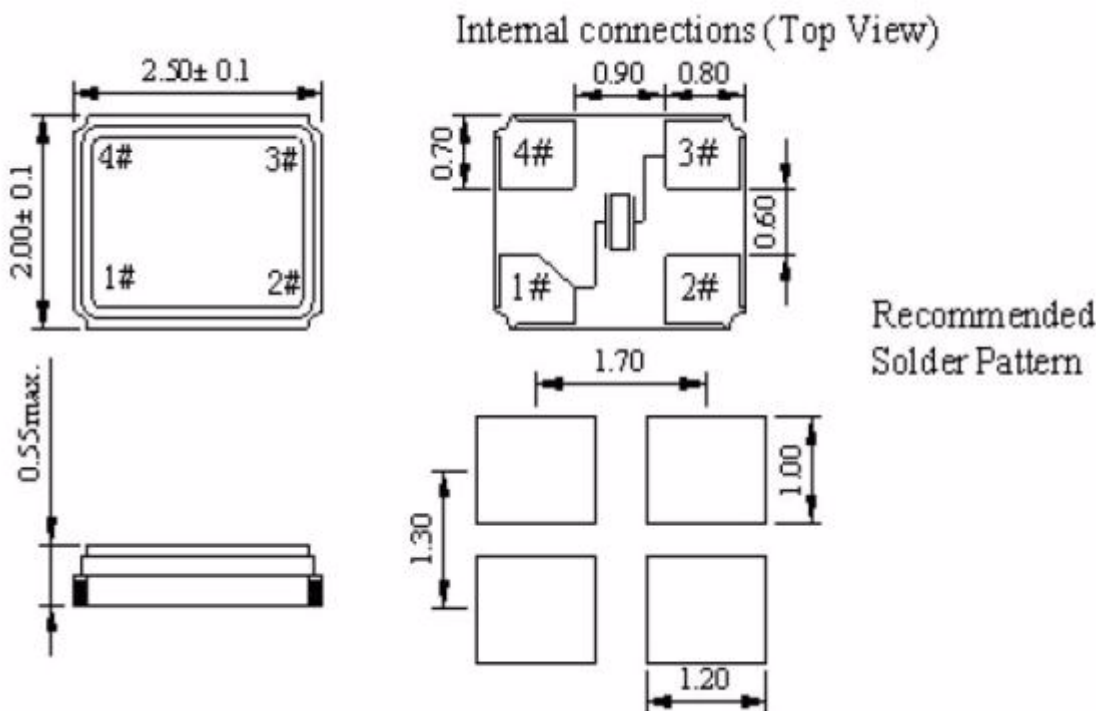

Holder Style	25x2x05 4-pad
Mode	Fundamental
Adjustment Tolerance	± 30PPM at 25°C
Temperature Stability	± 50 PPM
Operating Temp. Range	-10°C to +60°C
Load Capacitance	30 pF
ESR	80 Max Ohm
Static Capacitance (C0)	Unspecified pF
Ageing	+/-1ppm/Yr Max
Marking	AEL48WW/YY

Amdt Date	Change Note	AEL Code	
20 JUL 12	Package Corrected	X48M000000S015	
		Issue Ref	B