

Relay Module - PR1-RSC3-LV-120AC/2X21 - 2834504

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Preamsembled relay modules with screw connection, consisting of: Relay socket plug-in miniature power relay with power contacts, plug-in display/interference suppression module and relay retaining bracket. Input voltage: 120 V AC, contacts: 2 PDT, 8 A

Product Features

- ✓ Safe isolation between coil and contact side
- ✓ Logical contact arrangement thanks to 1/3-level relay base
- ✓ Operational reliability thanks to sealed relay



Key commercial data

Packing unit	1 pc
Minimum order quantity	5 pc
Weight per Piece (excluding packing)	64.0 GRM
Custom tariff number	85364900
Country of origin	Germany

Technical data

Note

Utilization restriction	EMC: class A product, see manufacturer's declaration in the download area
-------------------------	---

Dimensions

Width	16 mm
Height	78.5 mm
Depth	71 mm

Ambient conditions

Ambient temperature (operation)	-25 °C ... 60 °C
Ambient temperature (storage/transport)	-25 °C ... 85 °C

Coil side

Relay Module - PR1-RSC3-LV-120AC/2X21 - 2834504

Technical data

Coil side

Nominal input voltage U_N	120 V AC
Typical input current at U_N	9 mA (at 50 Hz)
	7 mA (At 60 Hz)
Typical response time	3 ms ... 12 ms
Typical release time range	1.5 ms ... 16 ms
Operating voltage display	Yellow LED
Protective circuit	Varistor

Contact side

Contact type	2 PDT
Contact material	AgNi
Maximum switching voltage	250 V AC/DC
Minimum switching voltage	5 V (at 10 mA)
Maximum inrush current	15 A (300 ms)
Min. switching current	10 mA (At 5 V)
Limiting continuous current	8 A
Interrupting rating (ohmic load) max.	2000 W (for 250 V AC)
	44 W (at 110 V DC)
	60 W (at 220 V DC)
	190 W (at 24 V DC)
	At 440 V AC
	85 W (at 48 V DC)
	60 W (at 60 V DC)
Switching capacity in acc. with DIN VDE 0660/IEC 60947	2 A (at 24 V, DC13)
	0.2 A (at 250 V, DC13)
	3 A (at 24 V, AC15)
	3 A (at 120 V, AC15)
	3 A (at 250 V, AC15)

General

Test voltage relay winding/relay contact	4 kV (50 Hz, 1 min.)
Test voltage relay contact/relay contact	2.5 kV (50 Hz, 1 min.)
Operating mode	100% operating factor
Mechanical service life	3×10^7 cycles
Standards/regulations	IEC 60664
	EN 50178
	IEC 62103
Pollution degree	3

Relay Module - PR1-RSC3-LV-120AC/2X21 - 2834504

Technical data

General

Surge voltage category	III
Mounting position	any
Assembly instructions	In rows with zero spacing

Connection data

Connection method	Screw connection
Stripping length	8 mm
Conductor cross section stranded min.	0.14 mm ²
Conductor cross section stranded max.	2.5 mm ²
Conductor cross section solid min.	0.14 mm ²
Conductor cross section solid max.	2.5 mm ²
Conductor cross section AWG/kcmil max	14
Conductor cross section AWG/kcmil min.	26
Screw thread	M3

Articles in set

Relay socket - PR1-BSC3/2X21 - 2833521



Relay socket PR1..., for miniature power relay or miniature switching relay with 1 or 2 PDT or solid-state relay of same construction, 1/3 level design, screw connections, connection facility for input/interference suppression modules

Single relay - REL-MR-120AC/21-21 - 2961448



Plug-in miniature power relay, with power contact, 2 PDTs, input voltage 120 V AC

Plug-in module - LV-120-230AC/110DC - 2833738



Plug-in module, for mounting on PR1 and PR2, with varistor and yellow LED, input voltage: 120 - 230 V AC/110 V DC ± 20%

Relay Module - PR1-RSC3-LV-120AC/2X21 - 2834504

Articles in set

Relay retaining bracket - EL1-P16 - 2833547



Relay retaining bracket, with eject function and integrated equipment marking area (7.5 x 15 mm), to suit relay socket PR1, for 16 mm high miniature power relay and solid-state relay

Classifications

eCl@ss

eCl@ss 4.0	27371102
eCl@ss 4.1	27371102
eCl@ss 5.0	27371603
eCl@ss 5.1	27371603
eCl@ss 6.0	27371603
eCl@ss 7.0	27371603
eCl@ss 8.0	27371603

ETIM

ETIM 2.0	EC001456
ETIM 3.0	EC001456
ETIM 4.0	EC001456
ETIM 5.0	EC001456

UNSPSC

UNSPSC 6.01	30211917
UNSPSC 7.0901	39121516
UNSPSC 11	39121516
UNSPSC 12.01	39121516
UNSPSC 13.2	39121516

Accessories

Accessories

Bridge

Relay Module - PR1-RSC3-LV-120AC/2X21 - 2834504

Accessories


Wire bridge - DB 50- 90 BU - 2821180

Wire bridge, Color: blue



Wire bridge - DB 50- 90 BK - 2820916

Wire bridge, Color: black



Wire bridge - DB 50- 90 GY - 2820929

Wire bridge, Color: gray



Device marking

Label - EML (15X6) R YE - 0819288



Label, Roll, yellow, unlabeled, can be labeled with: THERMOMARK ROLL, THERMOMARK X, THERMOMARK S1.1,
Mounting type: Adhesive, Lettering field: 15 x 6 mm

Marking material

Marker labels - MP 1 - 2833631




Equipment marker, labeling surface 6 x 15 mm

Relay Module - PR1-RSC3-LV-120AC/2X21 - 2834504


Accessories

Drawings

Circuit diagram




Diagram

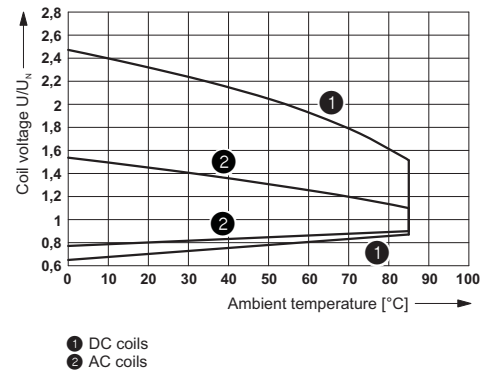


Operating voltage range of the relay

Diagram

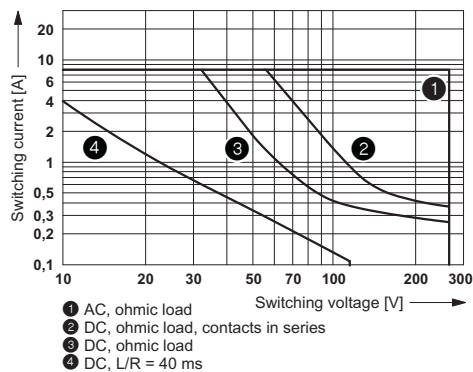

Interrupting rating


Diagram

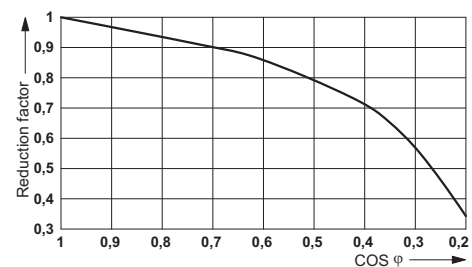

Service life reduction factor with various cos phi

Relay Module - PR1-RSC3-LV-120AC/2X21 - 2834504

Diagram

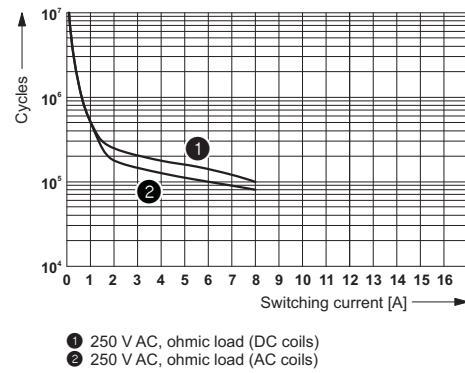

Electrical service life