

Interface module - DFLK-32 SMKDS3/SMKDS3 - 2300889

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



VARIOFACE feed-through module, for direct 1:1 coupling of individual signal cables up to 2.5 mm², via angled screw connection terminal blocks at both ends; no. of positions: 32

RoHS

Key Commercial Data

Packing unit	10 pc
GTIN	 4 017918 903237
GTIN	4017918903237
Weight per Piece (excluding packing)	155.970 g
Custom tariff number	85369010
Country of origin	Germany
Note	Made to Order (non-returnable)

Technical data

Dimensions

Width	180 mm
Height	27.5 mm
Depth	49 mm

Ambient conditions

Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-30 °C ... 70 °C
Maximum altitude	max. 2000 m
Degree of protection	IP20
	≥ IP54 (Installation location)

General

Nominal voltage U _N	150 V AC/DC
Max. perm. current (per branch)	4 A
Number of positions	32

Interface module - DFLK-32 SMKDS3/SMKDS3 - 2300889

Technical data

General

Mounting position	any
Assembly instructions	In rows with zero spacing

Connection data

Connection name	Field level
Connection in acc. with standard	IEC / EN
Connection method	Screw connection
Stripping length	8 mm
Screw thread	M3
Number of positions	32
Conductor cross section solid	0.2 mm ² ... 4 mm ²
Conductor cross section flexible	0.2 mm ² ... 2.5 mm ²
Conductor cross section AWG	24 ... 12

Connection data 2

Connection name	Controller level
Connection method	Screw connection
Number of positions	32
Conductor cross section solid	0.2 mm ² ... 4 mm ²
Conductor cross section flexible	0.2 mm ² ... 2.5 mm ²

Standards and Regulations

Designation	Air clearances and creepage distances
Standards/regulations	DIN EN 50178: 1998-04
Rated insulation voltage	180 V
Rated surge voltage	1.7 kV (1.2/50 µs)
Insulation	Functional insulation
Pollution degree	2
Overvoltage category	II


Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"

Drawings


Interface module - DFLK-32 SMKDS3/SMKDS3 - 2300889

Dimensional drawing

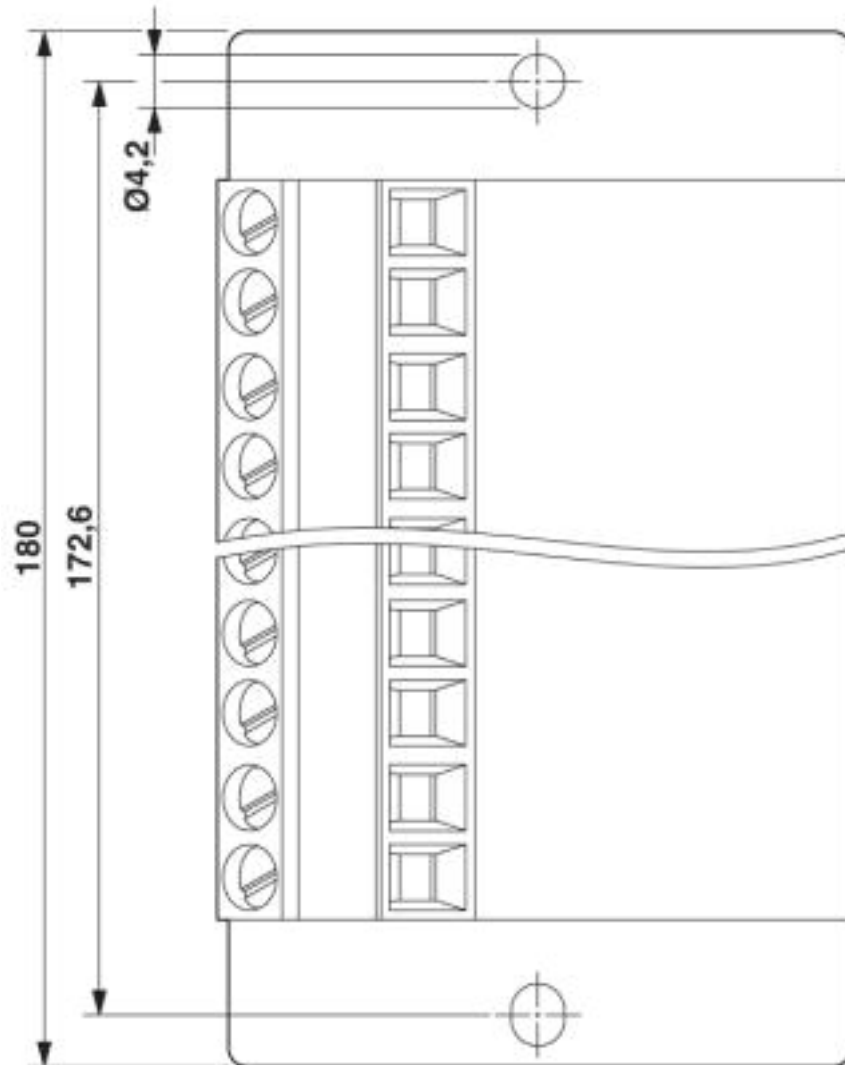

Interface module - DFLK-32 SMKDS3/SMKDS3 - 2300889


Dimensional drawing

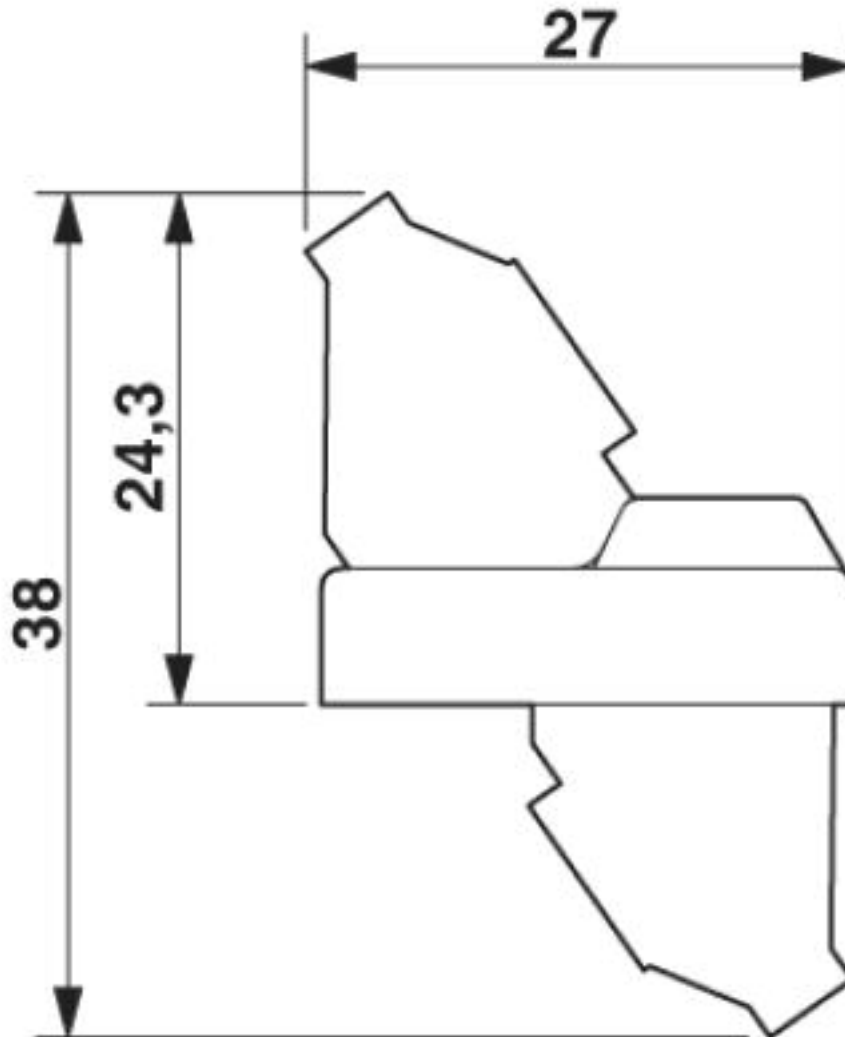

Dimensional drawing DFLK-32 SMKDS3/SMKDS3

Interface module - DFLK-32 SMKDS3/SMKDS3 - 2300889

Dimensional drawing

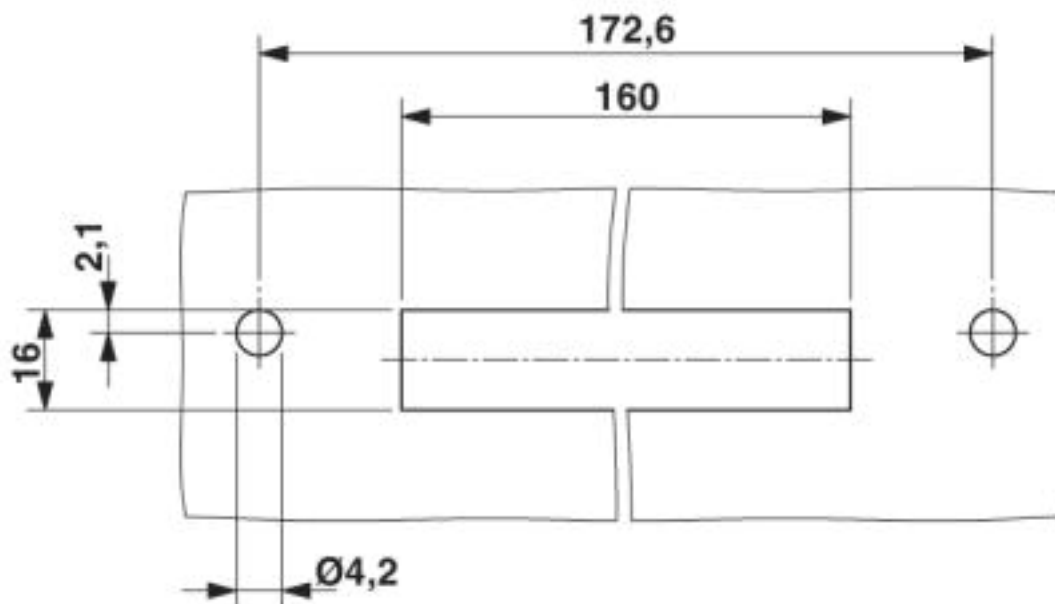

Dimensioning of the housing cutout

Classifications

eCl@ss

eCl@ss 4.0	27250300
eCl@ss 4.1	27250300
eCl@ss 5.0	27250300
eCl@ss 5.1	27250300
eCl@ss 6.0	27242600
eCl@ss 7.0	27141152
eCl@ss 8.0	27141152
eCl@ss 9.0	27141152

ETIM

ETIM 4.0	EC002780
ETIM 5.0	EC002780
ETIM 6.0	EC002780
ETIM 7.0	EC002780

UNSPSC

UNSPSC 6.01	30211824
UNSPSC 7.0901	39121421
UNSPSC 11	39121421
UNSPSC 12.01	39121421
UNSPSC 13.2	39121432

Interface module - DFLK-32 SMKDS3/SMKDS3 - 2300889

Classifications

UNSPSC

UNSPSC 18.0	39121432
UNSPSC 19.0	39121432
UNSPSC 20.0	39121432
UNSPSC 21.0	39121432

Approvals

Approvals

Approvals

EAC

Ex Approvals

Approval details

EAC		RU C- DE.A*30.B.01742
-----	---	--------------------------