

Interface module - DFLK-D62 SUBH/S - 2300863

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



VARIOFACE panel feed-through module, for direct coupling of single signal lines of up to 2.5 mm², with D-Subminiature pin strip and screw connection, number of positions 62

Your advantages

- ✓ 62-pos. pin strip
- ✓ According to IEC 60807-2
- ✓ Screw connection
- ✓ 1:1 connection
- ✓ D-SUB 4-40 UNC thread

RoHS

Key Commercial Data

Packing unit	10 pc
GTIN	 4 017918 903213
GTIN	4017918903213
Weight per Piece (excluding packing)	189.230 g
Custom tariff number	85369010
Country of origin	Germany
Note	Made to Order (non-returnable)

Technical data

Dimensions

Width	40.4 mm
Height	180 mm

Ambient conditions

Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C

General

Interface module - DFLK-D62 SUBH/S - 2300863

Technical data

General

Nominal voltage U_N	25 V AC
	50 V DC
Max. perm. current (per branch)	0.5 A
Number of positions	62
Status display	No
Mounting position	any
Assembly instructions	In rows with zero spacing

Connection data

Connection name	Field level
Connection in acc. with standard	IEC / EN
Connection method	Screw connection
Stripping length	8 mm
Screw thread	M3
Conductor cross section solid	0.2 mm ² ... 4 mm ²
Conductor cross section flexible	0.2 mm ² ... 2.5 mm ²
Conductor cross section AWG	24 ... 12

Connection data 2

Connection name	Controller level
Connection method	D-SUB pin strip
Number of connections	1
Number of positions	62

Supported controller

Controller	Teleperm XP
------------	-------------

Standards and Regulations

Designation	Air clearances and creepage distances
Standards/regulations	DIN EN 50178
Rated surge voltage	basic insulation
Pollution degree	2
Overvoltage category	II


Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"

Drawings


Interface module - DFLK-D62 SUBH/S - 2300863

Dimensional drawing

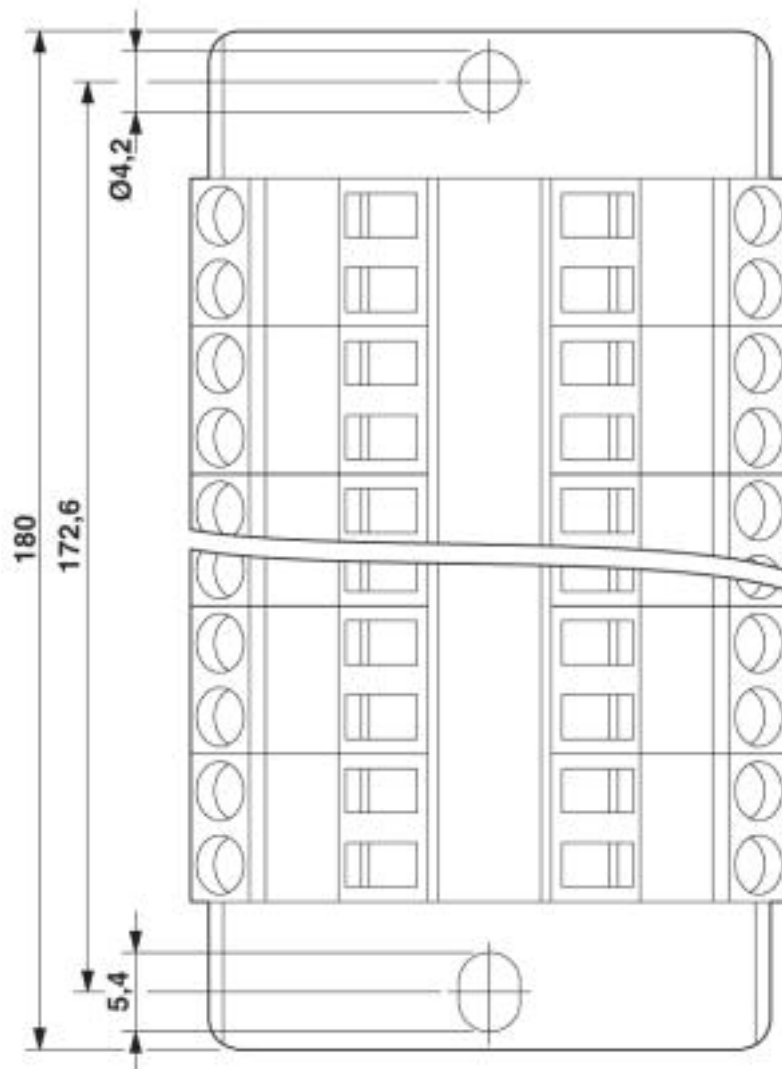


Interface module - DFLK-D62 SUBH/S - 2300863

Dimensional drawing

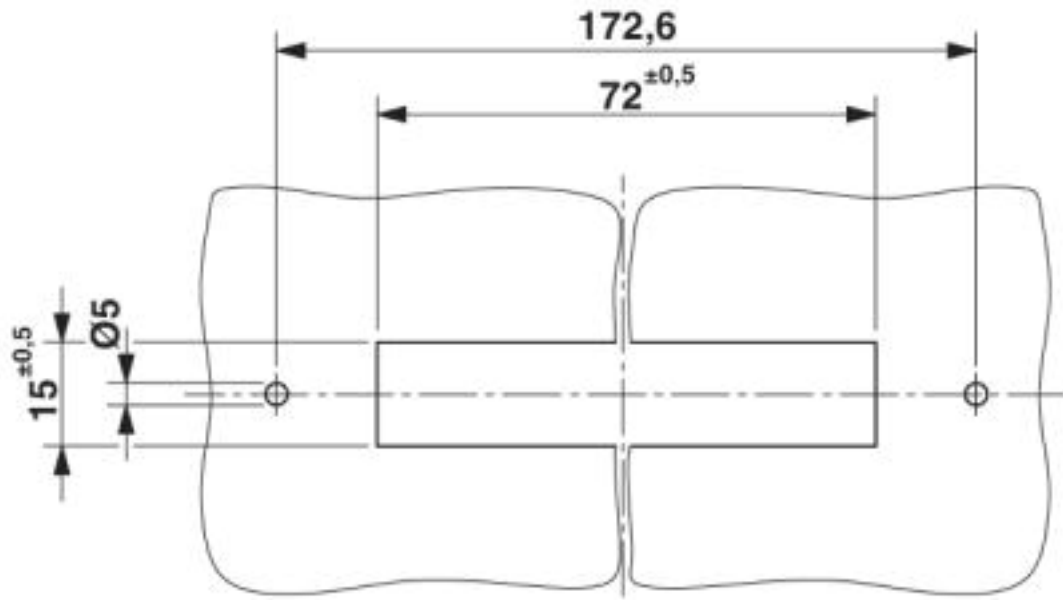

Interface module - DFLK-D62 SUBH/S - 2300863

Dimensional drawing

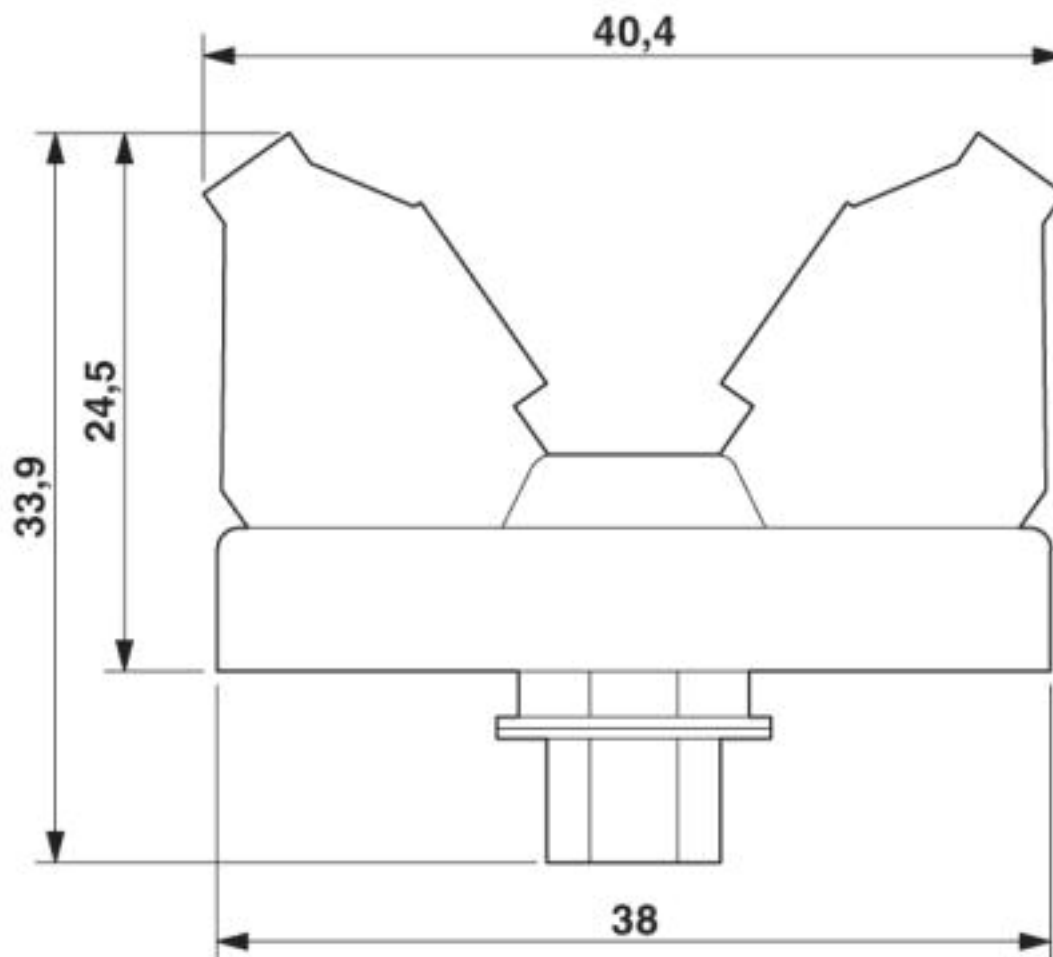

Classifications

eCl@ss

eCl@ss 4.0	27250300
eCl@ss 4.1	27250300
eCl@ss 5.0	27250300
eCl@ss 5.1	27250300
eCl@ss 6.0	27242600
eCl@ss 7.0	27141152
eCl@ss 8.0	27141152
eCl@ss 9.0	27141152

ETIM

ETIM 4.0	EC002780
ETIM 5.0	EC002780
ETIM 6.0	EC002780

Interface module - DFLK-D62 SUBH/S - 2300863

Classifications

ETIM

ETIM 7.0	EC002780
----------	----------

UNSPSC

UNSPSC 6.01	30211824
UNSPSC 7.0901	39121421
UNSPSC 11	39121421
UNSPSC 12.01	39121421
UNSPSC 13.2	39121432
UNSPSC 18.0	39121432
UNSPSC 19.0	39121432
UNSPSC 20.0	39121432
UNSPSC 21.0	39121432

Approvals

Approvals

Approvals

EAC

Ex Approvals

Approval details

EAC		RU C- DE.A*30.B.01742
-----	---	--------------------------

Accessories

Accessories

System cable

Cable - CABLE-D62SUBH/B/B/ 40/K4G/GK2 - 2319090



Assembled, shielded round cable, with 62-pos. HD D-SUB female connector at both ends; cable length: 0.4 m

Interface module - DFLK-D62 SUBH/S - 2300863

Accessories

Cable - CABLE-D62SUBH/B/B/ 60/K4G/GK2 - 2319087



Assembled, shielded round cable, with 62-pos. HD D-SUB female connector at both ends; cable length: 0.6 m

Cable - CABLE-D62SUBH/B/B/ 200/K4G/GK2 - 2312000



Assembled, shielded round cable, with 62-pos. HD D-SUB female connector at both ends; cable length: 2 m

Cable - CABLE-D62SUBH/B/B/ 300/K4G/GK2 - 2311991



Assembled, shielded round cable, with 62-pos. HD D-SUB female connector at both ends; cable length: 3 m

Cable - CABLE-D62SUBH/B/B/ 400/K4G/GK2 - 2311988



Assembled, shielded round cable, with 62-pos. HD D-SUB female connector at both ends; cable length: 4 m

Cable - CABLE-D62SUBH/B/B/ 500/K4G/GK2 - 2311975



Assembled, shielded round cable, with 62-pos. HD D-SUB female connector at both ends; cable length: 5 m

Interface module - DFLK-D62 SUBH/S - 2300863

Accessories

Cable - CABLE-D62SUBH/B/B/ 750/K4G/GK2 - 2311962



Assembled, shielded round cable, with 62-pos. HD D-SUB female connector at both ends; cable length: 7.5 m

Cable - CABLE-D62SUBH/B/B/1000/K4G/GK2 - 2311959



Assembled, shielded round cable, with 62-pos. HD D-SUB female connector at both ends; cable length: 10 m

Cable - CABLE-D62SUBH/B/B/1250/K4G/GK2 - 2311946



Assembled, shielded round cable, with 62-pos. HD D-SUB female connector at both ends; cable length: 12.5 m

Cable - CABLE-D62SUBH/B/B/1500/K4G/GK2 - 2311933



Assembled, shielded round cable, with 62-pos. HD D-SUB female connector at both ends; cable length: 15 m

Cable - CABLE-D62SUBH/B/B/1750/K4G/GK2 - 2311920



Assembled, shielded round cable, with 62-pos. HD D-SUB female connector at both ends; cable length: 17.5 m

Interface module - DFLK-D62 SUBH/S - 2300863

Accessories

Cable - CABLE-D62SUBH/B/B/2000/K4G/GK2 - 2311917



Assembled, shielded round cable, with 62-pos. HD D-SUB female connector at both ends; cable length: 20 m

Cable - CABLE-D62SUBH/B/B/3000/K4G/GK2 - 2901375



Assembled, shielded round cable, with 62-pos. HD D-SUB female connector at both ends; cable length: 30 m
