

Front adapters - FLKM 14-PA-INLINE/32 - 2302777

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



VARIOFACE front adapter for Inline modules, for transferring 32 (4 x 8) digital signals.



Key commercial data

Packing unit	1 pc
Weight per Piece (excluding packing)	67.8 GRM
Custom tariff number	85369010
Country of origin	Germany

Technical data

General

Nominal voltage U_N	60 V DC
Max. permissible current	1 A (per path)
Channels which can be connected	32
Connection type, connector	IDC/FLK pin strip (2.54 mm)
Number of connectors	4
No. of positions, connector	14
Mounting position	any
Standards/regulations	IEC 60664
	DIN EN 50178
	IEC 62103

Ambient conditions

Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C

Supported controller

Controller	PHOENIX CONTACT Inline
------------	------------------------

Front adapters - FLKM 14-PA-INLINE/32 - 2302777

Technical data

Supported controller

- suitable I/O card	IB IL 24 DI 32/HD-PAC
	IB IL 24 DO 32/HD-PAC

Classifications

eCl@ss

eCl@ss 4.0	27250313
eCl@ss 4.1	27250313
eCl@ss 5.0	27250313
eCl@ss 5.1	27250313
eCl@ss 6.0	27242208
eCl@ss 7.0	27242208
eCl@ss 8.0	27242208

ETIM

ETIM 2.0	EC001423
ETIM 3.0	EC001423
ETIM 4.0	EC001423
ETIM 5.0	EC002584


UNSPSC

UNSPSC 6.01	30211824
UNSPSC 7.0901	39121402
UNSPSC 11	39121402
UNSPSC 12.01	39121402
UNSPSC 13.2	39121402

Drawings

Front adapters - FLKM 14-PA-INLINE/32 - 2302777

Circuit diagram

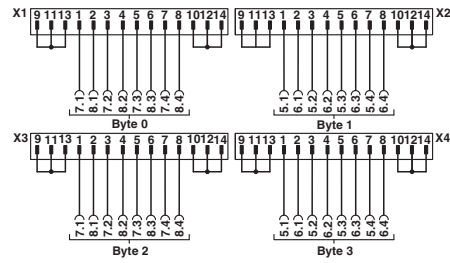

Connection scheme: FLKM 14-PA-INLINE/32

Connection diagram

