

## Interface module - FLKM 26 - 2281050

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



VARIOFACE module, with screw connection and flat-ribbon cable connector, for mounting on NS 32 or NS 35/7.5, with pin strip and short and long locking latches for socket strips, 26-pos.

The figure shows a 40-position version



### Key Commercial Data

|                                      |                                                                                                         |
|--------------------------------------|---------------------------------------------------------------------------------------------------------|
| Packing unit                         | 5 pc                                                                                                    |
| GTIN                                 | <br>4 017918 054502 |
| GTIN                                 | 4017918054502                                                                                           |
| Weight per Piece (excluding packing) | 130.850 g                                                                                               |
| Custom tariff number                 | 85369010                                                                                                |
| Country of origin                    | Germany                                                                                                 |
| Note                                 | Made to Order (non-returnable)                                                                          |

### Technical data

#### Dimensions

|        |         |
|--------|---------|
| Width  | 78.8 mm |
| Height | 77 mm   |
| Depth  | 58.5 mm |

#### Ambient conditions

|                                         |                  |
|-----------------------------------------|------------------|
| Ambient temperature (operation)         | -20 °C ... 50 °C |
| Ambient temperature (storage/transport) | -20 °C ... 70 °C |

#### General

|                                    |         |
|------------------------------------|---------|
| Max. permissible operating voltage | 25 V AC |
|                                    | 60 V DC |
| Max. perm. current (per branch)    | 1 A     |
| Number of positions                | 26      |

# Interface module - FLKM 26 - 2281050

## Technical data

### General

|                   |     |
|-------------------|-----|
| Mounting position | any |
|-------------------|-----|

### Connection data for connection 1

|                                  |                                             |
|----------------------------------|---------------------------------------------|
| Connection name                  | Field level                                 |
| Connection in acc. with standard | IEC / EN                                    |
| Connection method                | Screw connection                            |
| Stripping length                 | 8 mm                                        |
| Screw thread                     | M3                                          |
| Conductor cross section solid    | 0.2 mm <sup>2</sup> ... 4 mm <sup>2</sup>   |
| Conductor cross section flexible | 0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup> |
| Conductor cross section AWG      | 24 ... 12                                   |

### Standards and Regulations

|                                  |                       |
|----------------------------------|-----------------------|
| Connection in acc. with standard | CUL                   |
| Standards/regulations            | IEC 60664             |
|                                  | DIN EN 50178          |
| Rated insulation voltage         | 63 V                  |
| Rated surge voltage              | 0.6 kV                |
| Insulation                       | Functional insulation |
| Pollution degree                 | 2                     |
| Overvoltage category             | II                    |


### Environmental Product Compliance

|            |                                                                                                     |
|------------|-----------------------------------------------------------------------------------------------------|
| REACH SVHC | Lead 7439-92-1                                                                                      |
| China RoHS | Environmentally Friendly Use Period = 50                                                            |
|            | For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration" |

## Drawings

## Interface module - FLKM 26 - 2281050

Circuit diagram

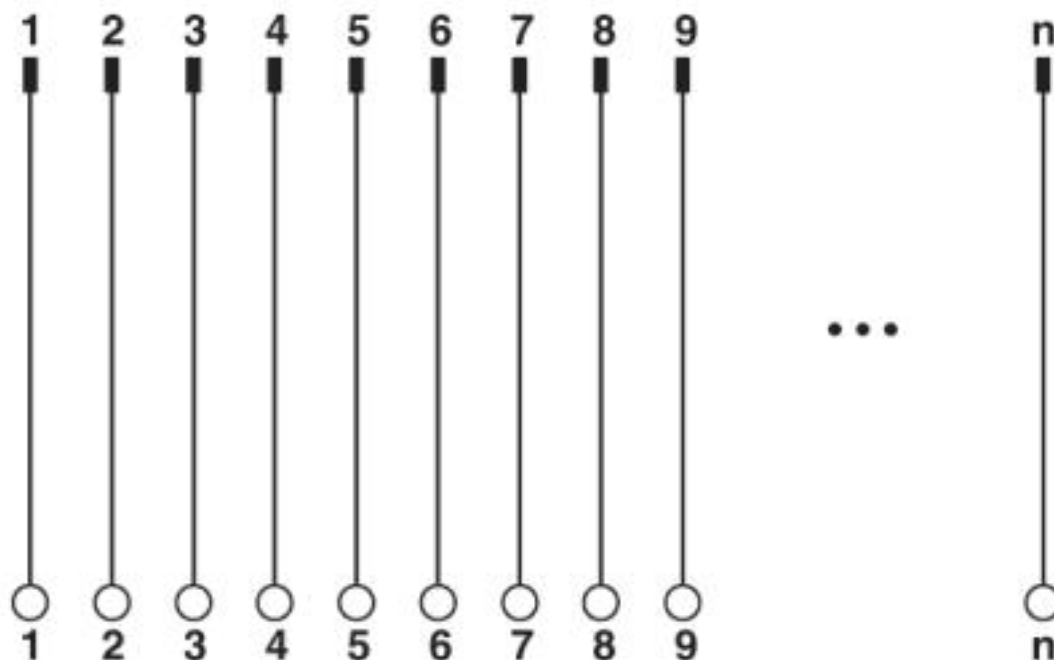

### Classifications

#### eCl@ss

|            |          |
|------------|----------|
| eCl@ss 4.0 | 27250300 |
| eCl@ss 4.1 | 27250300 |
| eCl@ss 5.0 | 27250300 |
| eCl@ss 5.1 | 27250300 |
| eCl@ss 6.0 | 27242600 |
| eCl@ss 7.0 | 27141152 |
| eCl@ss 8.0 | 27141152 |
| eCl@ss 9.0 | 27141152 |

#### ETIM

|          |          |
|----------|----------|
| ETIM 4.0 | EC002780 |
| ETIM 5.0 | EC002780 |
| ETIM 6.0 | EC002780 |
| ETIM 7.0 | EC002780 |

#### UNSPSC

|               |          |
|---------------|----------|
| UNSPSC 6.01   | 30211824 |
| UNSPSC 7.0901 | 39121421 |
| UNSPSC 11     | 39121421 |
| UNSPSC 12.01  | 39121421 |
| UNSPSC 13.2   | 39121432 |

## Interface module - FLKM 26 - 2281050

### Classifications

#### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 18.0 | 39121432 |
| UNSPSC 19.0 | 39121432 |
| UNSPSC 20.0 | 39121432 |
| UNSPSC 21.0 | 39121432 |

### Approvals

#### Approvals

#### Approvals

UL Recognized / cUL Recognized / EAC / cULus Recognized

#### Ex Approvals

#### Approval details

|                    |                                                                                     |                                                                                                                                                       |               |
|--------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|
| UL Recognized      |  | <a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a> | FILE E 118976 |
| Nominal voltage UN | 125 V                                                                               |                                                                                                                                                       |               |
| Nominal current IN | 1 A                                                                                 |                                                                                                                                                       |               |
| mm²/AWG/kcmil      | 30-12                                                                               |                                                                                                                                                       |               |

|                    |                                                                                     |                                                                                                                                                       |               |
|--------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|
| cUL Recognized     |  | <a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a> | FILE E 118976 |
| Nominal voltage UN | 125 V                                                                               |                                                                                                                                                       |               |
| Nominal current IN | 1 A                                                                                 |                                                                                                                                                       |               |
| mm²/AWG/kcmil      | 30-12                                                                               |                                                                                                                                                       |               |

|     |                                                                                     |                          |
|-----|-------------------------------------------------------------------------------------|--------------------------|
| EAC |  | RU C-<br>DE.A*30.B.01742 |
|-----|-------------------------------------------------------------------------------------|--------------------------|

|                  |                                                                                     |
|------------------|-------------------------------------------------------------------------------------|
| cULus Recognized |  |
|------------------|-------------------------------------------------------------------------------------|

## Interface module - FLKM 26 - 2281050

### Accessories

#### Accessories

#### System cable

##### Cable - FLK 26/EZ-DR/ 50/KONFEK - 2299385



Round cable set; connection 1: IDC/FLK socket strip (1x 26-position); connection 2: IDC/FLK socket strip (1x 26-position); cable length: 0.5 m

---

##### Cable - FLK 26/EZ-DR/ 100/KONFEK - 2299398



Round cable set; connection 1: IDC/FLK socket strip (1x 26-position); connection 2: IDC/FLK socket strip (1x 26-position); cable length: 1 m

---

##### Cable - FLK 26/EZ-DR/ 150/KONFEK - 2299408



Round cable set; connection 1: IDC/FLK socket strip (1x 26-position); connection 2: IDC/FLK socket strip (1x 26-position); cable length: 1.5 m

---

##### Cable - FLK 26/EZ-DR/ 300/KONFEK - 2299424



Round cable set; connection 1: IDC/FLK socket strip (1x 26-position); connection 2: IDC/FLK socket strip (1x 26-position); cable length: 3 m

---

##### Cable - FLK 26/EZ-DR/ 400/KONFEK - 2299437



Round cable set; connection 1: IDC/FLK socket strip (1x 26-position); connection 2: IDC/FLK socket strip (1x 26-position); cable length: 4 m

---

## Interface module - FLKM 26 - 2281050

### Accessories

Cable - FLK 26/EZ-DR/ 600/KONFEK - 2299440



Round cable set; connection 1: IDC/FLK socket strip (1x 26-position); connection 2: IDC/FLK socket strip (1x 26-position); cable length: 6 m

---

Cable - FLK 26/EZ-DR/ 800/KONFEK - 2299453



Round cable set; connection 1: IDC/FLK socket strip (1x 26-position); connection 2: IDC/FLK socket strip (1x 26-position); cable length: 8 m

---

Cable - FLK 26/EZ-DR/1000/KONFEK - 2299466



Round cable set; connection 1: IDC/FLK socket strip (1x 26-position); connection 2: IDC/FLK socket strip (1x 26-position); cable length: 10 m

---

Cable - FLK EZ-DR.../.../... - 2295059



Round cable, with preassembly, not shielded, variable cable length