

## Active module - UM-16 RELS/KSR-G24/21/E/MT/PLC - 2962379

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



VARIOFACE output extension module, with plug-in bases for 16 miniature relays, 1 PDT each, for 24 V DC, with knife disconnect terminal blocks in the output (without relays)

### Your advantages

- ✓ LED status indicator and freewheeling diode per signal path
- ✓ Polarity protection diode
- ✓ Supply voltage indicator (LED)
- ✓ Plug-in miniature relays



### Key Commercial Data

|                                      |                                                                                                         |
|--------------------------------------|---------------------------------------------------------------------------------------------------------|
| Packing unit                         | 1 pc                                                                                                    |
| GTIN                                 | <br>4 017918 087142 |
| GTIN                                 | 4017918087142                                                                                           |
| Weight per Piece (excluding packing) | 651.940 g                                                                                               |
| Custom tariff number                 | 85364190                                                                                                |
| Country of origin                    | Germany                                                                                                 |
| Note                                 | Made to Order (non-returnable)                                                                          |

### Technical data

#### Note

|                         |                                                                           |
|-------------------------|---------------------------------------------------------------------------|
| Utilization restriction | EMC: class A product, see manufacturer's declaration in the download area |
|-------------------------|---------------------------------------------------------------------------|

#### Dimensions

|        |        |
|--------|--------|
| Width  | 267 mm |
| Height | 112 mm |
| Depth  | 52 mm  |

#### Ambient conditions

|                                 |                  |
|---------------------------------|------------------|
| Ambient temperature (operation) | -20 °C ... 50 °C |
|---------------------------------|------------------|

# Active module - UM-16 RELS/KSR-G24/21/E/MT/PLC - 2962379

## Technical data

### Ambient conditions

|                                         |                  |
|-----------------------------------------|------------------|
| Ambient temperature (storage/transport) | -20 °C ... 70 °C |
| Degree of protection                    | IP00             |

### Input data

|                              |                     |
|------------------------------|---------------------|
| Nominal input voltage $U_N$  | 24 V DC             |
| Type of protection           | Free-wheeling diode |
| Protective circuit/component | Damping diode       |
| Operating voltage display    | Green LED           |
| Status display/channel       | Yellow LED          |

### Output data

|                             |             |
|-----------------------------|-------------|
| Contact type                | 1 PDT       |
| Maximum switching voltage   | 250 V AC/DC |
| Limiting continuous current | 5 A         |

### General

|                         |                                    |
|-------------------------|------------------------------------|
| No. of channels         | 16                                 |
| Compatible components   | Miniature relay, REL-MR- 24DC/21HC |
| With components         | no                                 |
| Mechanical service life | $3 \times 10^7$ cycles             |
| Operating mode          | 100% operating factor              |
| Mounting position       | any                                |
| Assembly instructions   | In rows with zero spacing          |
| Color                   | green                              |

### Connection data

|                       |                   |
|-----------------------|-------------------|
| Connection name       | Controller level  |
| Connection method     | IDC/FLK pin strip |
| Number of connections | 1                 |
| Number of positions   | 20                |
| Pitch                 | 2.54 mm           |

### Connection data 2

|                                  |                                             |
|----------------------------------|---------------------------------------------|
| Connection name                  | Field level                                 |
| Connection method                | Screw connection with disconnect knife      |
| Stripping length                 | 8 mm                                        |
| Screw thread                     | M3                                          |
| Number of connections            | 48                                          |
| Conductor cross section solid    | 0.2 mm <sup>2</sup> ... 4 mm <sup>2</sup>   |
| Conductor cross section flexible | 0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup> |
| Conductor cross section AWG      | 24 ... 12                                   |

### Connection data 3

|                 |        |
|-----------------|--------|
| Connection name | Supply |
|-----------------|--------|

## Active module - UM-16 RELS/KSR-G24/21/E/MT/PLC - 2962379

### Technical data

#### Connection data 3

|                                  |                                             |
|----------------------------------|---------------------------------------------|
| Connection method                | Screw connection with disconnect knife      |
| Stripping length                 | 8 mm                                        |
| Screw thread                     | M3                                          |
| Number of connections            | 4                                           |
| Conductor cross section solid    | 0.2 mm <sup>2</sup> ... 4 mm <sup>2</sup>   |
| Conductor cross section flexible | 0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup> |
| Conductor cross section AWG      | 24 ... 12                                   |

#### Connection data 4

|                       |                             |
|-----------------------|-----------------------------|
| Connection name       | Connection for basic module |
| Connection method     | IDC/FLK pin strip           |
| Number of connections | 1                           |
| Number of positions   | 20                          |
| Pitch                 | 2.54 mm                     |

#### Supported controller

|                     |                             |
|---------------------|-----------------------------|
| Controller          | ALLEN-BRADLEY PLC 5         |
| - suitable I/O card | 1771 OBN                    |
| Controller          | GE-FANUC RX3i               |
| - suitable I/O card | IC694MDL754                 |
| Controller          | HONEYWELL Experion PKS C200 |
| - suitable I/O card | TC-ODD 321                  |
| Controller          | MITSUBISHI MELSEC L         |
| - suitable I/O card | LY41PT1P                    |
|                     | LY42PT1P                    |
| Controller          | MITSUBISHI MELSEC Q         |
| - suitable I/O card | QY82P                       |
| Controller          | SIEMENS S7-1500             |
| - suitable I/O card | 6ES7 522-1BL00-0AB0         |
|                     | 6ES7 522-1BL01-0AB0         |

#### Standards and Regulations

|                          |                                                                                                |
|--------------------------|------------------------------------------------------------------------------------------------|
| Standards/regulations    | DIN EN 50178                                                                                   |
|                          | IEC 60664                                                                                      |
| Rated insulation voltage | 260 V AC                                                                                       |
| Rated surge voltage      | 4 kV (Basic insulation between output contact current paths)                                   |
|                          | 6 kV (Safe isolation and reinforced insulation between input circuit and output contact paths) |
| Pollution degree         | 2                                                                                              |
| Overvoltage category     | III                                                                                            |

#### Environmental Product Compliance

|            |                |
|------------|----------------|
| REACH SVHC | Lead 7439-92-1 |
|------------|----------------|

## Active module - UM-16 RELS/KSR-G24/21/E/MT/PLC - 2962379


### Technical data

#### Environmental Product Compliance

|            |                                                                                                     |
|------------|-----------------------------------------------------------------------------------------------------|
| China RoHS | Environmentally Friendly Use Period = 50                                                            |
|            | For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration" |

### Drawings

Circuit diagram

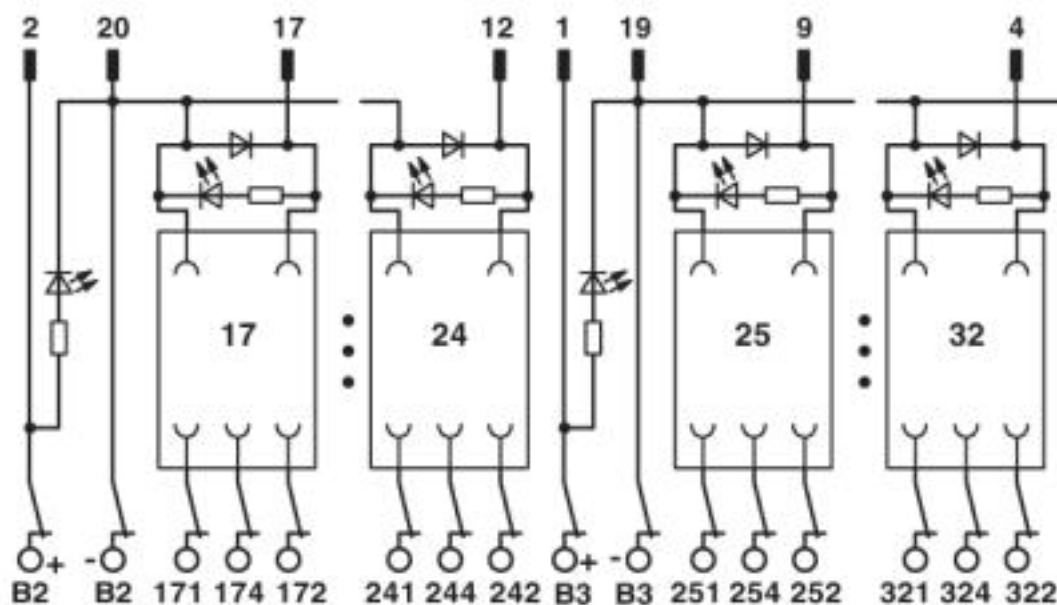

### Classifications

#### eCl@ss

|            |          |
|------------|----------|
| eCl@ss 4.0 | 27371100 |
| eCl@ss 4.1 | 27371100 |
| eCl@ss 5.0 | 27371600 |
| eCl@ss 5.1 | 27371000 |
| eCl@ss 6.0 | 27371600 |
| eCl@ss 7.0 | 27141152 |
| eCl@ss 8.0 | 27141152 |
| eCl@ss 9.0 | 27141152 |

#### ETIM

|          |          |
|----------|----------|
| ETIM 5.0 | EC002780 |
| ETIM 6.0 | EC002780 |
| ETIM 7.0 | EC002780 |

## Active module - UM-16 RELS/KSR-G24/21/E/MT/PLC - 2962379

### Classifications

#### UNSPSC

|               |          |
|---------------|----------|
| UNSPSC 6.01   | 30211916 |
| UNSPSC 7.0901 | 39121515 |
| UNSPSC 11     | 39121515 |
| UNSPSC 12.01  | 39121515 |
| UNSPSC 13.2   | 39122326 |
| UNSPSC 18.0   | 39121432 |
| UNSPSC 19.0   | 39121432 |
| UNSPSC 20.0   | 39121432 |
| UNSPSC 21.0   | 39121432 |

### Approvals

#### Approvals

---

Approvals

EAC

---

Ex Approvals

#### Approval details

|     |                                                                                     |                          |
|-----|-------------------------------------------------------------------------------------|--------------------------|
| EAC |  | RU C-<br>DE.A*30.B.01742 |
|-----|-------------------------------------------------------------------------------------|--------------------------|

### Accessories

#### Accessories

##### Retaining bracket

Retaining bracket - SIM-ERSN-HB-MR - 2271471



Retainer, for miniature relay

---

Single relay

## Active module - UM-16 RELS/KSR-G24/21/E/MT/PLC - 2962379

### Accessories

Single relay - REL-MR- 24DC/21HC - 2961312



Plug-in miniature power relay, with power contact for high continuous currents, 1 PDT, input voltage 24 V DC

---

### Necessary add-on products

Active module - UM-16 RELS/KSR-G24/21/MT/PLC - 2962382



VARIOFACE output module, with plug-in bases for 16 miniature relays, 1 PDT each, for 24 V DC, with knife disconnect terminal blocks in the output (without relays)