


Wirewound/Metal Film Resistors, Commercial Power, Radial Lead



FEATURES

- High power dissipation in small volume
- Low solder spot temperature
- Very stable mounting
- Non-flammable
- High pulse load handling capabilities
- High heat and moisture resistance



RoHS
COMPLIANT

TECHNOLOGY

RMWL: The resistive element is a wire which is wound on a fiber glass core.

RMFL: The resistive element is a metal film resistor consisting of a metal layer deposited over a high grade ceramic rod.

The mounting terminations are crimped to the resistive body to assure good mechanical and electrical contact. To ensure a flexible assembling process, the resistors are offered in various terminals styles, such as long or short, one or two pins in stainless steel for lower solder spot. The resistor body and lead ends are housed within a rectangular ceramic case which is non-flammable, will not melt even at high overloads and is resistant to most commonly used cleaning solvents, in accordance with IEC 60068-2-45.

STANDARD ELECTRICAL SPECIFICATIONS

MODEL	POWER RATING $P_{70^{\circ}\text{C}}$ W	RESISTANCE RANGE ⁽¹⁾ Ω	TOLERANCE ⁽²⁾ %	E-SERIES Decade Values
RMW03L	3	0.22 - 1.5	± 10	24
		1.6 - 3.9K	± 5	
RMF03L		-	± 10	
	5	100 - 39K	± 5	
RMW05L		0.47 - 1.5	± 10	
		1.6 - 4.7K	± 5	
RMF05L		-	± 10	
		100 - 51K	± 5	
RMW07L	7	0.47 - 1.5	± 10	
		1.6 - 7.5K	± 5	
RMF07L		-	± 10	
		1K - 100K	± 5	
RMW10L	10	0.47 - 1.5	± 10	
		1.6 - 10K	± 5	
RMF10L		-	± 10	
		1K - 150K	± 5	

Notes:

⁽¹⁾ Special resistance values available upon request

⁽²⁾ Other tolerances available upon request



TECHNICAL SPECIFICATIONS

PARAMETER	UNIT	RMWL	RMF03L	RMF05L	RMF07L	RMF10L
Limiting Voltage	V	$\sqrt{P_n \times R}$	750	1000	1200	1500
Insulation Voltage	V	> 2000				
Temperature Coefficient ⁽³⁾	ppm/°C	R < 10 Ω: 0 to 600; R ≥ 10 Ω: - 80 to + 140;	± 250			
Operating Temperature	°C	- 25 to + 155				
Short Time Overload	-	10 x rated power for 5 seconds				


Note:

⁽³⁾ Temperature Coefficient of ± 30 , 50 or 90 ppm/°C available on RMW upon request

DIMENSIONS in millimeters (inches)

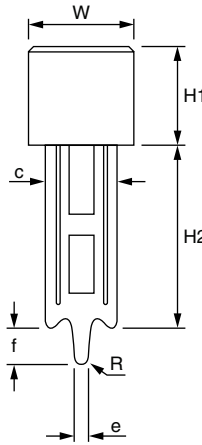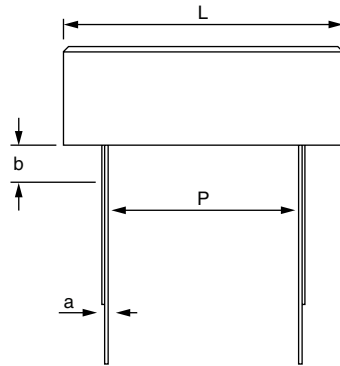

**TERMINAL STYLE 1
(SINGLE PIN)**

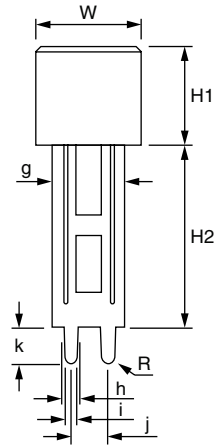

**TERMINAL STYLE 2
(DOUBLE PIN)**


TYPE	L	P	W	H1	H2
RMW03L RMF03L	24.0 ± 1.0 (0.95 ± 0.04)	12.5 ± 1.0 (0.49 ± 0.04)	9.0 ± 1.0 (0.36 ± 0.04)	9.0 ± 1.0 (0.36 ± 0.04)	10.0 ± 1.5 (0.40 ± 0.06) or 25.0 ± 1.5 (0.99 ± 0.06)
RMW05L RMF05L	27.0 ± 1.0 (1.06 ± 0.04)	15.0 ± 1.0 (0.59 ± 0.04)	9.5 ± 1.0 (0.38 ± 0.04)	9.5 ± 1.0 (0.38 ± 0.04)	
RMW07L RMF07L	35.0 ± 1.0 (1.38 ± 0.04)	22.5 ± 1.0 (0.89 ± 0.04)	9.5 ± 1.0 (0.38 ± 0.04)	9.5 ± 1.0 (0.38 ± 0.04)	
RMW10L RMF10L	48.0 ± 1.0 (1.89 ± 0.04)	35.0 ± 1.0 (1.38 ± 0.04)	9.5 ± 1.0 (0.38 ± 0.04)	9.5 ± 1.0 (0.38 ± 0.04)	

OTHER DIMENSIONS in millimeters (inches)

a	0.4 ± 0.02 (0.02 ± 0.008)	g	7.3 ± 0.30 (0.29 ± 0.012)
b	5.0 ± 0.50 (0.20 ± 0.020)	h	1.5 ± 0.10 (0.06 ± 0.004)
c	7.3 ± 0.30 (0.29 ± 0.012)	i	1.4 ± 0.10 (0.06 ± 0.004)
d	1.5 ± 0.10 (0.06 ± 0.004)	j	5.0 ± 0.10 (0.20 ± 0.004)
e	1.4 ± 0.10 (0.06 ± 0.004)	k	4.5 ± 0.20 (0.80 ± 0.008)
f	4.5 ± 0.20 (0.18 ± 0.008)		

ELECTRICAL CHARACTERISTICS

The power that the resistor can dissipate depends on the operating temperature.

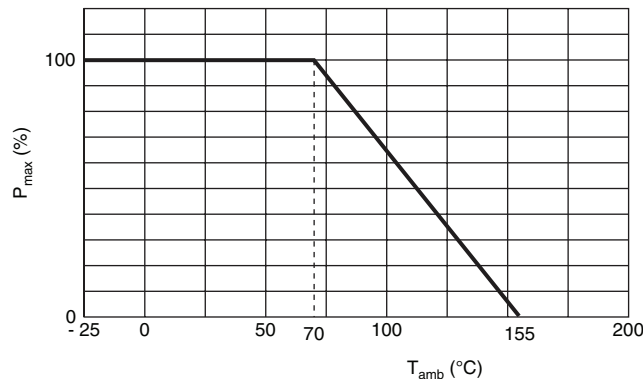


DERATING

Maximum dissipation (P_{max}) in percentage of rated power as a function of ambient temperature (T_{amb})



APPLICATION INFORMATION

The temperature rise of terminal (solder spot) and resistor body (hot spot) as a function of load for terminal styles 1 and 2.





TERMINAL STYLE 1 (ONE PIN)

SOLDER SPOT

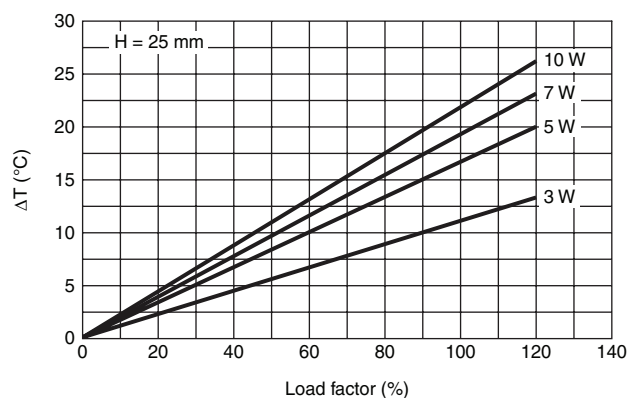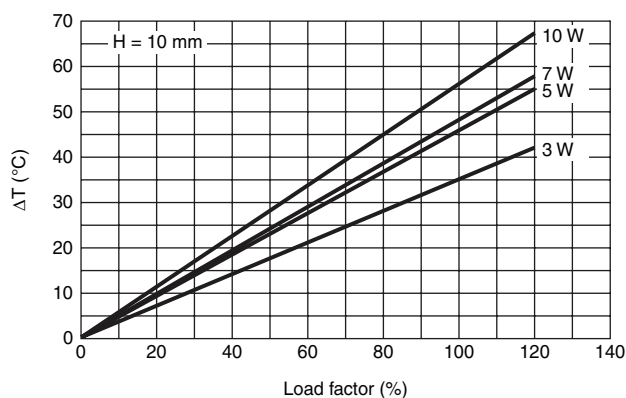



HOT SPOT

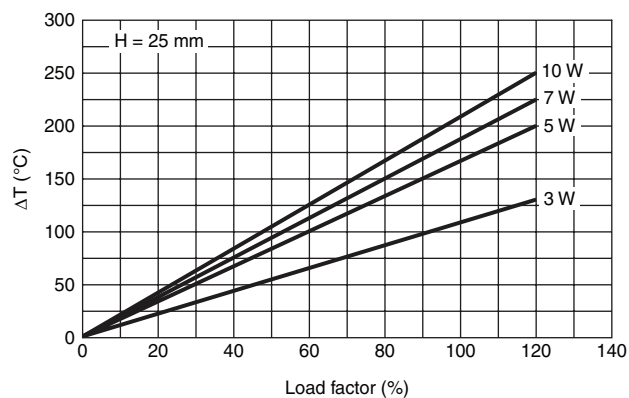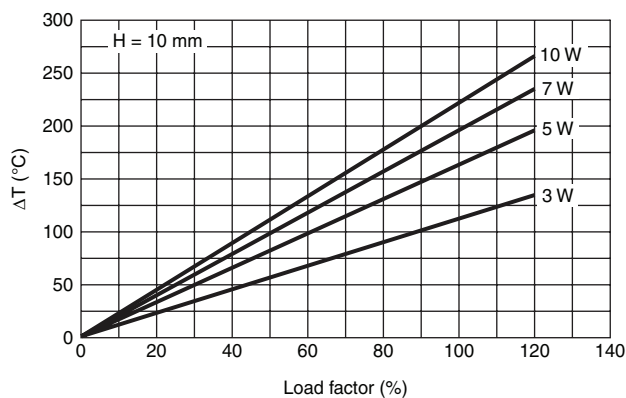





TERMINAL STYLE 2 (TWO PINS)

SOLDER SPOT

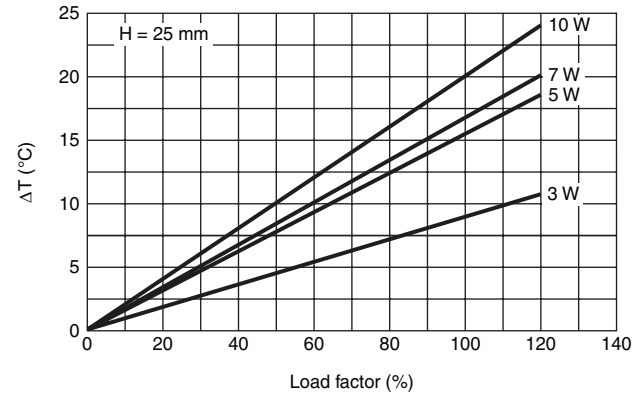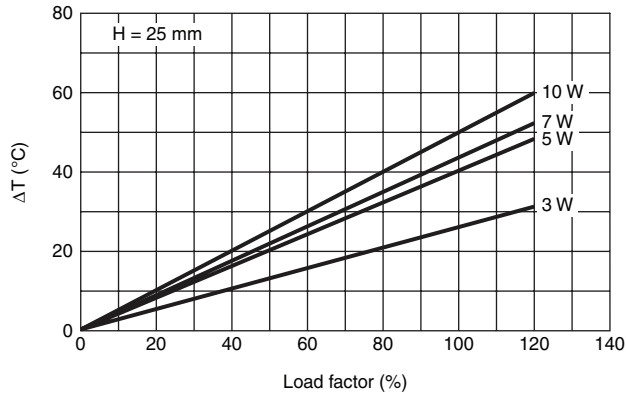

HOT SPOT

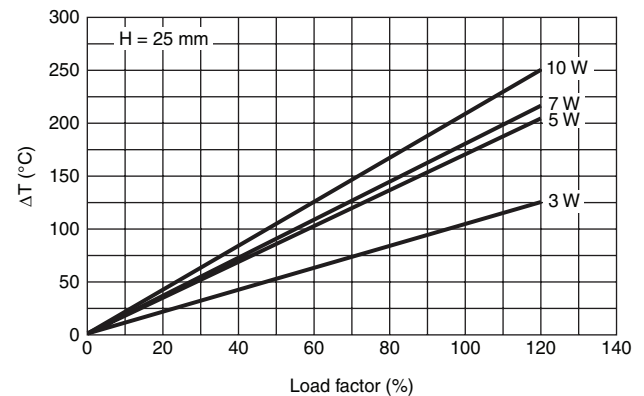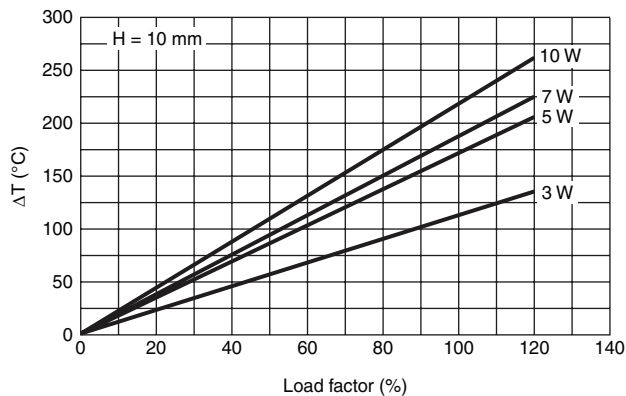

Notes:

Application information available on request:

- Pulse load behavior
- High frequency behavior (self inductance)

MARKING

The resistor is marked with the its type designation. The nominal resistance, the tolerance, the rated dissipation at $T_{amb} = 70$ °C and the production date (week and year), are printed in red on the resistor body. For values up to 910Ω the R is used as a decimal point. For values of 1000Ω or higher the letter K is used a decimal point.

Example:

PHX	RMW07L	7 W
2R2	5 %	221

ORDERING CODE NUMBER

The ordering code is indicating resistor type style/length of terminal and ohmic value.

2 3 2 2 2 5 X X X X X

PRODUCT TYPE	CODE	TYPE OF TERMINAL	CODE	TERMINAL LENGTH	CODE	OHMIC VALUE	RESISTANCE DECADE	LAST DIGIT
RMW03L	0	Style 1	3	10.0 mm (0.40")	1		0.22 Ω - 0.91 Ω	7
RMW05L	1	Style 2	4				1 Ω - 9.1 Ω	8
RMW07L	2						10 Ω - 91 Ω	9
RMW10L	3			25.0 mm (0.98")	2		100 Ω - 910 Ω	1
RMF03L	6						1 k Ω - 9.1 k Ω	2
RMF05L	7						10 k Ω - 91 k Ω	3
RMF07L	8						100 k Ω - 150 k Ω	4
RMF10L	9							

NAFTA ORDERING CODE NUMBER

The resistor have on ordering code with 18 digits, first 5 digits for product type and the subsequent digits indicate the resistance value, tolerance and terminal style.

R M W 0 5 W 4 7 R 0 0 J 2 5 S 2 S S

PRODUCT TYPES	POWER	CODE	VALUE	5 DIGITS	TOLERANCES	CODE	TERMINAL STYLES FOR 3 W UP TO 10 W	CODE	TERMINAL STAINLESS STEEL	CODE
RMW or RMF	3 W	03W	1 Ω	1R000	10 %	K	Terminal height 10 mm (0.394") one pin	10S1		SS
	5 W	05W	10 Ω	10R00	5 %	J	Terminal height 10 mm (0.394") two pins	10S2		
	7 W	07W	100 Ω	100R0			Terminal height 25 mm (0.984") one pin	25S1		
	10 W	10W	1 k Ω	1K000			Terminal height 25 mm (0.984") two pins	25S2		
			10 k Ω	10K00						
			100 k Ω	100K0						



NAFTA ORDERING INFORMATION

PRODUCT	TOLERANCE	NAFTA ORDERING CODE	PACKAGING	QUANTITY (pieces)
RMW03L	± 10 %	RMW03WxxxxxK10S1SS	BOX	500
	± 5 %	RMW03WxxxxxJ10S1SS		
	± 10 %	RMW03WxxxxxK25S1SS		
	± 5 %	RMW03WxxxxxJ25S1SS		
	± 10 %	RMW03WxxxxxK10S2SS		
	± 5 %	RMW03WxxxxxJ10S2SS		
	± 10 %	RMW03WxxxxxK25S2SS		
	± 5 %	RMW03WxxxxxJ25S2SS		
RMF03L	± 5 %	RMF03WxxxxxJ10S1SS		
		RMF03WxxxxxJ25S1SS		
		RMF03WxxxxxJ10S2SS		
		RMF03WxxxxxJ25S2SS		
RMW05L	± 10 %	RMW05WxxxxxK10S1SS		
	± 5 %	RMW05WxxxxxJ10S1SS		
	± 10 %	RMW05WxxxxxK25S1SS		
	± 5 %	RMW05WxxxxxJ25S1SS		
	± 10 %	RMW05WxxxxxK10S2SS		
	± 5 %	RMW05WxxxxxJ10S2SS		
	± 10 %	RMW05WxxxxxK25S2SS		
	± 5 %	RMW05WxxxxxJ25S2SS		
RMF05L	± 5 %	RMF05WxxxxxJ10S1SS		
		RMF05WxxxxxJ25S1SS		
		RMF05WxxxxxJ10S2SS		
		RMF05WxxxxxJ25S2SS		
RMW07L	± 10 %	RMW07WxxxxxK10S1SS		
	± 5 %	RMW07WxxxxxJ10S1SS		
	± 10 %	RMW07WxxxxxK25S1SS		
	± 5 %	RMW07WxxxxxJ25S1SS		
	± 10 %	RMW07WxxxxxK10S2SS		
	± 5 %	RMW07WxxxxxJ10S2SS		
	± 10 %	RMW07WxxxxxK25S2SS		
	± 5 %	RMW07WxxxxxJ25S2SS		
RMF07L	± 5 %	RMF07WxxxxxJ10S1SS		
		RMF07WxxxxxJ25S1SS		
		RMF07WxxxxxJ10S2SS		
		RMF07WxxxxxJ25S2SS		
RMW10L	± 10 %	RMW10WxxxxxK10S1SS		400
	± 5 %	RMW10WxxxxxJ10S1SS		
	± 10 %	RMW10WxxxxxK25S1SS		
	± 5 %	RMW10WxxxxxJ25S1SS		
	± 10 %	RMW10WxxxxxK10S2SS		
	± 5 %	RMW10WxxxxxJ10S2SS		
	± 10 %	RMW10WxxxxxK25S2SS		
	± 5 %	RMW10WxxxxxJ25S2SS		
RMF10L	± 5 %	RMF10WxxxxxJ10S1SS		
		RMF10WxxxxxJ25S1SS		
		RMF10WxxxxxJ10S2SS		
		RMF10WxxxxxJ25S2SS		

Composition of Ohmic Value


VALUE	5 DIGITS
1 Ω	1R000
10 Ω	10R00
100 Ω	100R0
1 k Ω	1K000
10 k Ω	10K00
100 k Ω	100K0
1 M Ω	1M000

The ohmic value in the NAFTA ordering code (see table NAFTA ORDERING INFORMATION) is represented by the “xxxxx” in the middle of the above ordering code. The table “Composition of Ohmic Value” gives some examples on how to use these 5 digits.

Example:

RMW05L, 47 Ω , 5 %, terminal 25 mm, two pins is
RMW05W47R00J25S2SS

PACKAGING in millimeters (inches)





PRODUCT TYPE	P	M	N	QUANTITY (pieces)
RMW03L RMF03L	310 (12.2)	200 (7.9)	190 (7.5)	500
RMW05L RMF05L	310 (12.2)	200 (7.9)	190 (7.5)	
RMW07L RMF07L	300 (11.8)	250 (9.9)	215 (8.5)	
RMW10L RMF10L	300 (11.8)	250 (9.9)	215 (8.5)	400

**TESTS AND REQUIREMENTS**

Essentially all tests are carried out in accordance with the schedule of IEC publications 60115-1, category 25/155/56 (rated temperature range - 25 °C to + 155 °C; damp heat, long term, 56 days and along the lines of IEC publications 60068-2); "Recommended basic climatic and mechanical robustness testing procedure for electronic components" and under standard atmosphere conditions according to IEC 60068-1 subclause 5.3, unless otherwise specified. In some instances deviations from IEC applications were necessary for our specified method.

PERFORMANCE				
IEC 60115-1 CLAUSE	IEC 60068-2 TEST METHOD	TEST	PROCEDURE	REQUIREMENTS
4.6.1.1		Insulation resistance	500 V _{DC} during 1 minute; V-block method	$R_{ins \min} 100 \text{ M}\Omega$
4.7		Voltage proof on insulation	1000 V _{RMS} during 1 minute; V-block method	$\Delta R/R_{\max} \pm 0.5 \% + 0.05 \Omega$
4.8		Temperature coefficient	Between - 25 °C and + 155 °C RMWL $R < 10 \Omega$ $R \geq 10 \Omega$ RMFL	0 to 600 ppm/°C; - 80 to 140 ppm/°C $\pm 250 \text{ ppm/}^\circ\text{C}$
4.13		Short time overload	Room temperature $P = 10 \times P_n$; 5 seconds, $V_{\max}$ for: RMF03L $\leq 1500 \text{ V}$ RMF05L $\leq 2000 \text{ V}$ RMF07L $\leq 2500 \text{ V}$ RMF10L $\leq 3000 \text{ V}$	$\Delta R/R_{\max} \pm 2 \% + 0.1 \Omega$
4.16	21(U)	Robustness of terminations:		No damage
4.16.2	21(Ua1)	Tensile all samples	Load 45 N; 10 seconds	
4.17	20(Ta)	Solderability (after aging)	16 hours at 155 °C; leads immersed in flux 600 for 2 ± 0.5 seconds in a solder bath at $235 \pm 5 \text{ }^\circ\text{C}$	Good tinning ($\geq 95 \%$ covered) no visible damage
4.18	20(Tb)	Resistance to soldering heat	Thermal shock: 3 seconds, 350 °C	$\Delta R/R_{\max} \pm 1 \% + 0.05 \Omega$
4.19	14(Na)	Rapid change of temperature	30 minutes at - 25 °C and 30 minutes + 275 °C; 5 cycles	No visible damage $\Delta R/R_{\max} \pm 1 \% + 0.05 \Omega$
4.22	6(Fc)	Vibration	Frequency 10 a 55 Hz, displacement 0.75 mm or acceleration 10 g, three directions; total 6 hours (3 x 2 hours)	No visible damage $\Delta R/R_{\max} \pm 1 \% + 0.05 \Omega$
4.23	2(Ba)	Climatic sequence: Dry heat	16 hours, 155 °C	$\Delta R/R_{\max} \pm 1 \% + 0.05 \Omega$
4.23.2		Damp heat (accelerated)	24 hours; 25 °C to 55 °C; 90 to 100 % RH	
4.23.3	30(Db)	1st cycle		
4.23.4	1(Aa)	Cold	2 hours; - 25 °C	
4.23.6	30 (Db)	Damp heat (accelerated) remaining cycles	5 days; 25 °C to 55 °C; 90 to 100 % RH	
4.24	3 (Ca)	Damp heat (steady state)	56 days; 40 °C; 90 to 95 % RH; loaded with 0.01 P _n	$\Delta R/R_{\max} \pm 3 \% + 0.1 \Omega$
4.25.1		Endurance (at 70 °C)	1000 hours load with P _n ; 1.5 hours ON and 0.5 hours OFF	$\Delta R/R_{\max} \pm 5 \% + 0.1 \Omega$

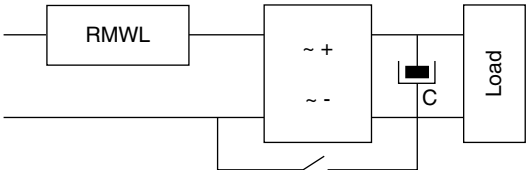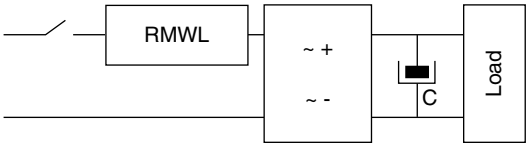
ADDITIONAL TESTS IN ACCORDANCE WITH BPV53-8.753/044			
1 ⁽¹⁾	Interruption after dump	Simplified test circuit (safety box required): $V_1 = 256 \text{ V}_{AC}$ $C = 100 \mu\text{F}$ $\text{Load} = 1640 \Omega$  Procedure: Switch on the circuit; after warming up time minimum 5 seconds; short circuit one of the diodes in the bridge rectifier	The resistor must interrupt without any sign of flame or material ejected from its body
2 ⁽¹⁾	Test of overload current	Simplified test circuit (safety box required): $V_1 = 256 \text{ V}_{AC}$ $C = 500 \mu\text{F}$ $\text{Load} = 1640 \Omega$  Procedure: Pulse ON/OFF the circuit for 10 times; interval between pulses: 10 seconds maximum	$\Delta R/R_{\max} \pm 2 \% + 0.1 \Omega$

Note:

⁽¹⁾ Value range for RMW05L and RMW07L; $1 \Omega < \text{value range} \leq 10 \Omega$

TYPICAL CIRCUIT APPLICATION

The typical application for these resistors is inrush current limitation of line connected at input stage of power supplier.

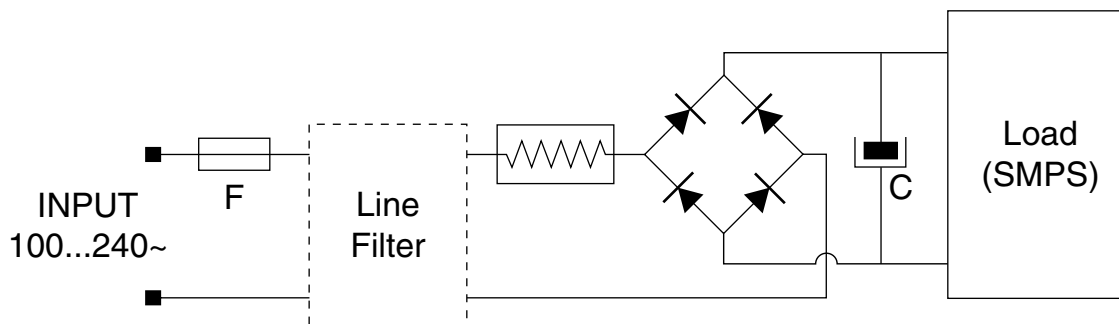



Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.