

PRG21AR420MS1RA

In Production


Recommended

RoHS

REACH

AEC-Q200

Appearance & Shape



Part Number	Dimensions (mm)					
	L	W	T	e	g	
PRG21_RA	2.0±0.2	1.25±0.2	0.9±0.2	0.2 min.	0.5 min.	
PRG21_RK	2.0±0.2	1.25±0.2	1.25±0.2	0.2 min.	0.5 min.	

Applications

Limited Usage Automotive Grade

Packaging Information

Packaging	Specifications	Minimum Order Quantity
RA	180mm Embossed Tape	4000

Features

1. Rapid operation to protect the circuit in an overcurrent condition abnormality such as a short circuit.
By removing the overcurrent condition, these products automatically return to the initial condition and can be used repeatedly.
2. Suitable for countermeasure to short circuit test in safety standard
3. Stable resistance after operation due to ceramic PTC
4. Similar size (0603 size) is possible due to the large capacity for electric power.
5. Possible to use these products as current limiting resistors with overcurrent protection functions
6. SMD type is helpful for miniaturizing circuits because of its small size and light weight
7. Lead is not contained in the terminations

Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
2. This datasheet has only typical specifications because there is no space for detailed specifications.
Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

PRG21AR420MS1RA



Specifications

Max. Voltage	20V	Mass	0.011g
Hold Current	15mA		
Measure Condition of Hold Current	(at +105°C)		
Hold Current (2)	25mA		
Measure Condition of Hold Current (2)	(at +85°C)		
Hold Current (3)	54mA		
Measure Condition of Hold Current (3)	(at +25°C)		
Trip Current	102mA		
Measure Condition of Trip Current	(at +25°C)		
Trip Current(2)	130mA		
Measure Condition of Trip Current(2)	(at -40°C)		
Max. Current	590A		
Resistance (25°C)	42Ω		
Resistance Value Tolerance (at 25°C)	±20%		
Operating Temperature Range	-40°C to 105°C		
Size Code (in mm)	2.0x1.25mm		
Shape	SMD		


Attention

1.This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.


2.This datasheet has only typical specifications because there is no space for detailed specifications.
 Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

PRG21AR420MS1RA


Product Data

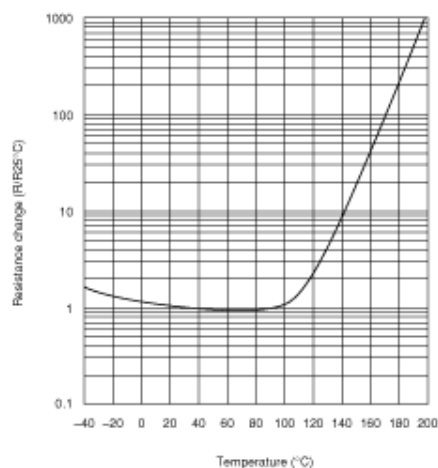

Resistance-Temperature Charac.

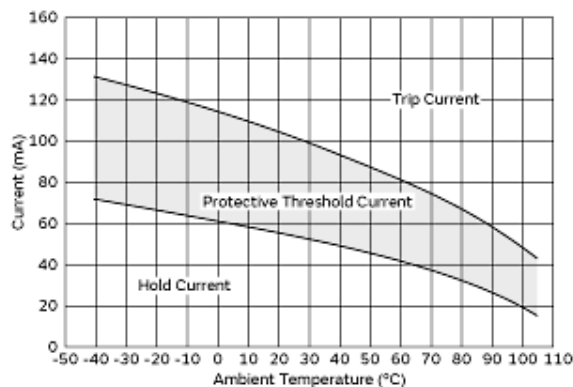

Protective Threshold Current Range

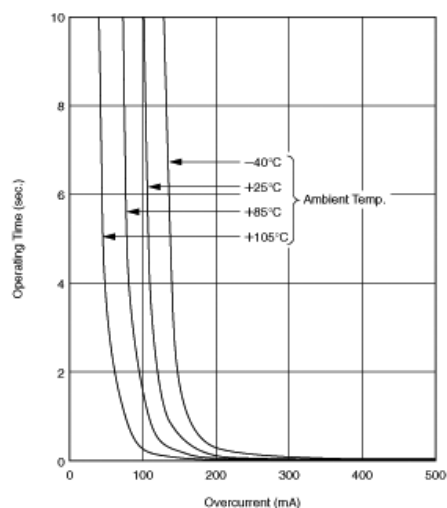

Operating Time (Typical Curve)

Attention

- 1.This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
- 2.This datasheet has only typical specifications because there is no space for detailed specifications. Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.