


SR920

Silver oxide batteries are suitable for quartz watches, medical devices and precision instruments. All models are 100% made in Japan, and environmentally friendly (0% mercury).

In Production

REACH

Appearance & Shape



(in mm)

Features

- High energy density**
 High energy density has been achieved owing to the Murata's original high-precision material-mixing technology. The use of antioxidant, high performance separators also contributes to improved storage characteristics.
- Excellent stable discharge characteristics**
 Constant voltage output is available during the discharging.
- Excellent leakage resistance**
 Murata-unique sealing structure, coupled with special sealing-material treatment, has helped accomplish the excellent leakage resistance.

Applications

Other Usage	- Medical · Capsule endoscopy · Insulin pumps · CGM(Continuous Glucose Monitoring) · Drug delivery systems - IoT/Others · Tracking devices
-------------	--

- RoHS Directive / European Directives**
 This product does not contain Mercury(Hg), Cadmium(Cd), nor Lead(Pb), and conforms to EC regulation values. (Directive 2006/66/EC, 2013/56/EU)
 Battery pack are excluded from RoHS directive. (DIRECTIVE 2011/65/EU OF THE EUROPEAN PARLIAMENT AND OF THE COUNCIL of 8 June 2011 on the restriction of the use of certain hazardous substances in electrical and electronic equipment)

Attention
 1.This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
 2.This datasheet has only typical specifications because there is no space for detailed specifications.
 Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

SR920


 Specifications

Battery type	Silver Oxide Batteries
Nominal Voltage	1.55V
Nominal Capacity	40mAh
Operating Temperature Range	-10°C to 60°C
Diameter (inch)	0.374inch
Diameter (mm)	9.5mm
Height (inch)	0.081inch
Height (mm)	2.05mm
IEC (JIS)	SR69
Mass (oz)	0.0208oz
Mass (g)	0.59g

Attention
1.This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
2.This datasheet has only typical specifications because there is no space for detailed specifications.
Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

SR920

Product Data

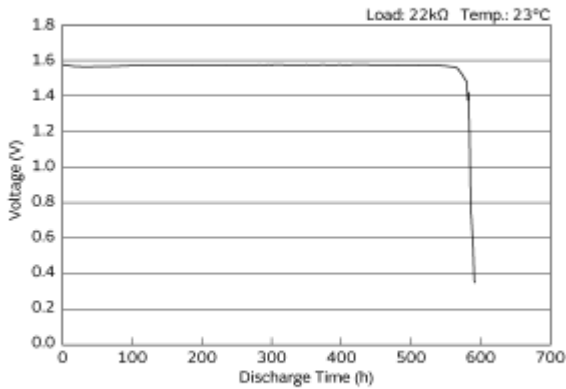

Discharge Characteristic

Attention
1.This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
2.This datasheet has only typical specifications because there is no space for detailed specifications.
Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.