

## Female test connector - PSBJ 3/50/6 GY - 3048098

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Female test connector, color: gray

### Your advantages

- ✓ The test socket PSBJ... is used in place of the normal bridge screw and ensures the voltage pick-off on a bridged group of terminals
- ✓ The test sockets are tailored to the special applications encountered in the power supply industry

RoHS

### Key Commercial Data

|                                      |                                                                                                         |
|--------------------------------------|---------------------------------------------------------------------------------------------------------|
| Packing unit                         | 10 pc                                                                                                   |
| Minimum order quantity               | 10 pc                                                                                                   |
| GTIN                                 | <br>4 017918 880996 |
| GTIN                                 | 4017918880996                                                                                           |
| Weight per Piece (excluding packing) | 5.100 g                                                                                                 |
| Custom tariff number                 | 85366990                                                                                                |
| Country of origin                    | Poland                                                                                                  |

### Technical data

#### Dimensions

|              |      |
|--------------|------|
| Length       | 6 mm |
| Width        | 6 mm |
| Pin diameter | 4 mm |
| Screw thread | M3   |

#### General

|                        |        |
|------------------------|--------|
| Color                  | gray   |
| Material               | Brass  |
| Tightening torque, min | 0.5 Nm |
| Tightening torque max  | 0.6 Nm |

## Female test connector - PSBJ 3/50/6 GY - 3048098


### Technical data

#### Environmental Product Compliance

|            |                                                                                                     |
|------------|-----------------------------------------------------------------------------------------------------|
| REACH SVHC | Lead 7439-92-1                                                                                      |
| China RoHS | Environmentally Friendly Use Period = 50                                                            |
|            | For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration" |

### Drawings

Dimensional drawing

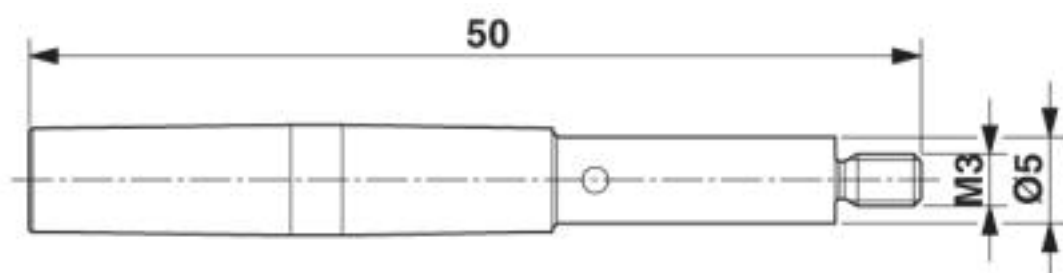

### Classifications

#### eCl@ss

|            |          |
|------------|----------|
| eCl@ss 4.0 | 27141100 |
| eCl@ss 4.1 | 27141100 |
| eCl@ss 5.0 | 27141100 |
| eCl@ss 5.1 | 27141100 |
| eCl@ss 6.0 | 27141100 |
| eCl@ss 7.0 | 27440313 |
| eCl@ss 8.0 | 27440313 |
| eCl@ss 9.0 | 27440313 |

#### ETIM

|          |          |
|----------|----------|
| ETIM 2.0 | EC000897 |
| ETIM 3.0 | EC000897 |
| ETIM 4.0 | EC002255 |
| ETIM 5.0 | EC002255 |
| ETIM 6.0 | EC002255 |
| ETIM 7.0 | EC002255 |

#### UNSPSC

|               |          |
|---------------|----------|
| UNSPSC 6.01   | 30211812 |
| UNSPSC 7.0901 | 39121410 |
| UNSPSC 11     | 39121411 |
| UNSPSC 12.01  | 39121411 |

## Female test connector - PSBJ 3/50/6 GY - 3048098

### Classifications

#### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 13.2 | 39121410 |
| UNSPSC 18.0 | 39121410 |
| UNSPSC 19.0 | 39121410 |
| UNSPSC 20.0 | 39121410 |
| UNSPSC 21.0 | 39121410 |