


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.






SECTION A-A

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	REV A DRAWING RELEASED	07/20/2017	SLI

PIN 1
BACK ROW

"J1"
USB 3.0 SERIES "A" JACK
CONTACTS 30μ GOLD

DIELECTRIC

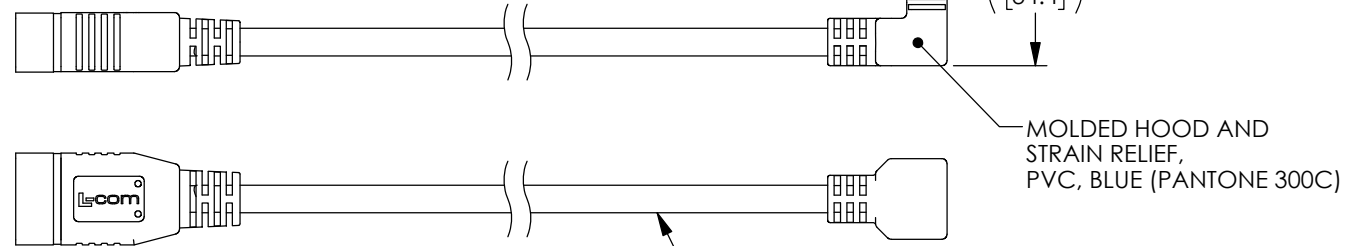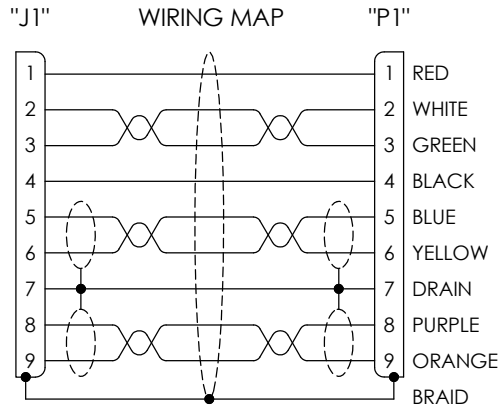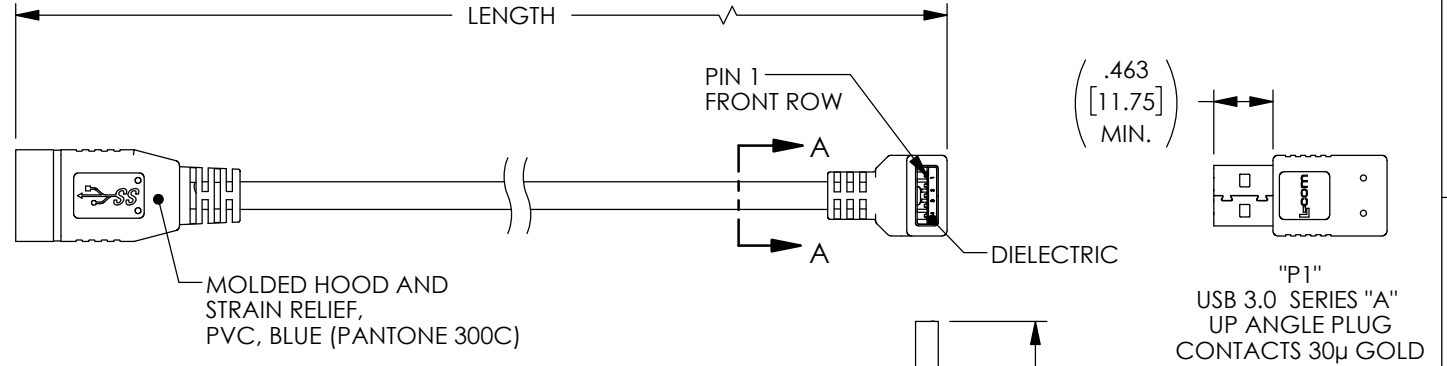


PART NUMBER	LENGTH METERS [FEET]
U3A00046-03M	0.3 [.98]
U3A00046-05M	0.5 [1.64]
U3A00046-075M	0.75 [2.46]
U3A00046-1M	1.0 [3.28]

UL STYLE 20276,
(2) TWISTED PAIR, 30AWG WITH
ALUM/POLY FOIL SHIELD AND DRAIN WIRE,
(1) UNSHIELDED TWISTED PAIR, 30AWG,
(2) CONDUCTORS, 24AWG,
OVERALL ALUMINUM/MYLAR AND BRAIDED SHIELD,
JACKET: PVC, BLUE (PANTONE 300C)
(NOM DIA. .217" [5.5])

NOTES:

1. CABLE ASSEMBLY SHALL HAVE 360° SHIELD TERMINATION.
2. CABLE ASSEMBLY MUST MEET USB 3.0 REQUIREMENTS.
3. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
4. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:
CE2011/65/EU(RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0%		APPROVALS	DATE	 50 HIGH STREET NORTH ANDOVER, MA 01845	
		DRAWN BY SLI	07/20/2017		
		CHECKED BY BZHANG	07/20/2017	CATEGORY USB	
		APPROVED BY SPAN	07/20/2017	PRODUCT DESCRIPTION CA, USB3.0 A-F/90UP A-M	
ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 [5.08] .XX = ±.02 [1.51] .XXX = ±.005 [1.3]		CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		SIZE A	FSCM NO. 43321
PROJECTION 		COLOR VARIATIONS MAY OCCUR		DWG. NO. U3A00046	REV. A
		SCALE: NONE		CAD FILE: U3A00046.SLDDRW	
				SHEET 1 OF 1	