


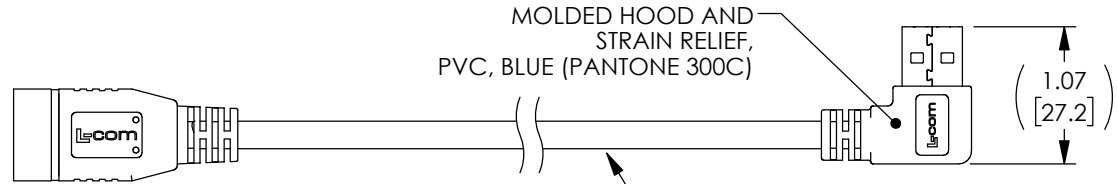
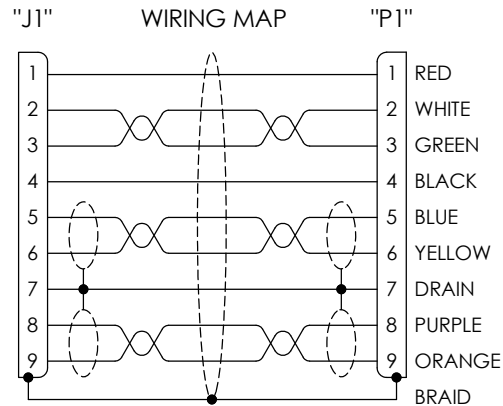


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	REV A DRAWING RELEASED	09/27/2018	SLJ

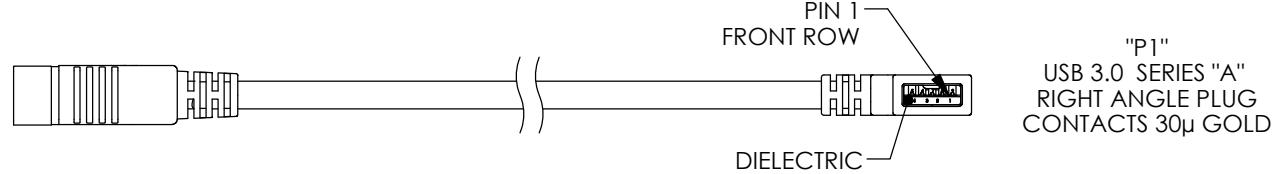

"J1"
USB 3.0 SERIES "A" JACK
CONTACTS 30μ GOLD

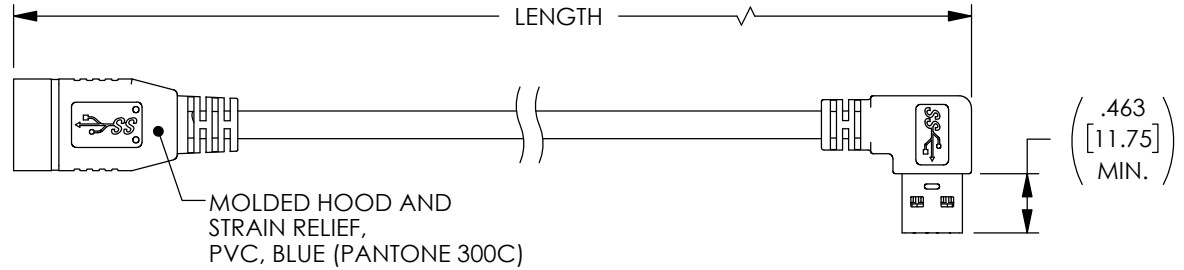

PART NUMBER	LENGTH METERS [FEET]
U3A00047-03M	0.3 [.98]
U3A00047-05M	0.5 [1.64]
U3A00047-075M	0.75 [2.46]
U3A00047-1M	1.0 [3.28]


MOLDED HOOD AND STRAIN RELIEF, PVC, BLUE (PANTONE 300C)

UL STYLE 20276,
(2) TWISTED PAIR, 30AWG WITH ALUM/POLY FOIL SHIELD AND DRAIN WIRE,
(1) UNSHIELDED TWISTED PAIR, 30AWG,
(2) CONDUCTORS, 24AWG,
OVERALL ALUMINUM/MYLAR AND BRAIDED SHIELD,
JACKET: PVC, BLUE (PANTONE 300C)
(NOM DIA. .217" [5.5])

NOTES:

1. CABLE ASSEMBLY SHALL HAVE 360° SHIELD TERMINATION.
2. CABLE ASSEMBLY MUST MEET USB 3.0 REQUIREMENTS.
3. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
4. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:
CE2011/65/EU(RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0% ALL OTHER DIMENSIONAL TOLERANCES: X = ± .2 [5.08] XX = ± .02 [51] .XXX = ±.005 [13]	APPROVALS	DATE	50 HIGH STREET NORTH ANDOVER, MA 01845		CATEGORY	PRODUCT DESCRIPTION	SIZE	FSCM NO.	DWG. NO.	REV.
	DRAWN BY CN_SEVEN_LI	07/20/2017								
	CHECKED BY CN_BILL_ZHANG	07/20/2017								
	APPROVED BY CN_SHAWN_PAN	07/20/2017								
CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		CA, USB3.0 A-F/90RT A-M								
PROJECTION 	COLOR VARIATIONS MAY OCCUR		A	43321	U3A00047	A				
			SCALE: NONE		CAD FILE: U3A00047.SLDDRW		SHEET 1 OF 1			