

## Valve connectors - SACC-V-3CON-PG9/A-1L 24V - 1527906

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Valve connectors, 3-position, Valve connector A, with 1 LED, Screw connection, cable gland Pg9, external cable diameter 6 mm ... 8 mm

RoHS

### Key Commercial Data

|              |                                                                                      |
|--------------|--------------------------------------------------------------------------------------|
| Packing unit | 1 pc                                                                                 |
| GTIN         |  |
| GTIN         | 4017918981006                                                                        |

### Technical data

#### Dimensions

|                   |               |
|-------------------|---------------|
| External diameter | 6 mm ... 8 mm |
|-------------------|---------------|

#### Ambient conditions

|                                 |                               |
|---------------------------------|-------------------------------|
| Ambient temperature (operation) | -25 °C ... 85 °C (valve plug) |
| Degree of protection            | IP65                          |

#### General

|                              |                      |
|------------------------------|----------------------|
| Rated current at 40°C        | 10 A                 |
| Rated voltage                | 24 V                 |
| Number of positions          | 3                    |
| Color handle area            | transparent          |
| Insulation resistance        | ≥ 100 MΩ             |
| Status display               | 1 LED                |
| Protective circuit/component | unwired              |
| Overvoltage category         | II                   |
| Degree of pollution          | 3                    |
| Connection method            | Screw connection     |
| Conductor cross section      | 0.34 mm² ... 1.5 mm² |
| Conductor cross section AWG  | 22 ... 16            |

# Valve connectors - SACC-V-3CON-PG9/A-1L 24V - 1527906

## Technical data

### General

|                             |                      |
|-----------------------------|----------------------|
| Insertion/withdrawal cycles | 50 (Valve connector) |
|-----------------------------|----------------------|

### Material

|                                        |      |
|----------------------------------------|------|
| Flammability rating according to UL 94 | HB   |
| Valve plug contact material            | CuSn |
| Valve plug contact surface material    | Ni   |
| Valve plug contact insert material     | PA6  |
| Material housing valve plug            | PA6  |
| Sealing material                       | NBR  |

### Standards and Regulations


|                                        |    |
|----------------------------------------|----|
| Flammability rating according to UL 94 | HB |
|----------------------------------------|----|

### Environmental Product Compliance

|            |                                                                                                     |
|------------|-----------------------------------------------------------------------------------------------------|
|            | Lead 7439-92-1                                                                                      |
| China RoHS | Environmentally Friendly Use Period = 50                                                            |
|            | For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration" |

## Drawings

Dimensional drawing

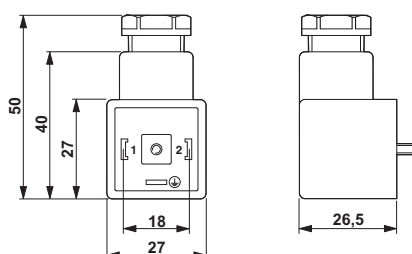

## Approvals

### Approvals

Approvals

EAC

Ex Approvals

### Approval details

## Valve connectors - SACC-V-3CON-PG9/A-1L 24V - 1527906

### Approvals

|     |                                                                                   |               |
|-----|-----------------------------------------------------------------------------------|---------------|
| EAC |  | EAC-Zulassung |
|-----|-----------------------------------------------------------------------------------|---------------|

Phoenix Contact 2019 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>