

VS-PC-2X-POF-980-SCRJ/FSMA-2

Order No.: 1657119

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1657119>

Assembled FO cable, break-out cable, polymer fiber 980/1000 µmm,
SCRJ/IP20 on FSMA/IP20, for installation inside control cabinets,
length: 2 m

**Commercial data**

EAN	4046356100175
Pack	1 pcs.
Customs tariff	85447000
Weight/Piece	0.0539 KG
Catalog page information	Page 214 (PC-2009)

Product notes

WEEE/RoHS-compliant since:
05/02/2006



[http://
www.download.phoenixcontact.com](http://www.download.phoenixcontact.com)
Please note that the data given
here has been taken from the
online catalog. For comprehensive
information and data, please refer
to the user documentation. The
General Terms and Conditions of
Use apply to Internet downloads.

Technical data**Mechanical characteristics**

Number of positions	2
Connection profile	SCRJ according to DIN EN 50377-6-1
Fiber type	Polymer Fiber
Fiber	980/1000 µm


Ferrule diameter	2.50 mm
Number of fibers	2
Insertion/withdrawal cycles	≥ 1000
External cable diameter	Twin conductor (2.2 x 4.4 mm)
Type of cable	Break-out cable
Smallest bending radius, fixed installation	30 mm
Smallest bending radius, movable installation	30 mm
Length of cable	2 m
Ambient temperature (operation)	-20 °C ... 70 °C
	-20 °C ... 70 °C

Material data

Housing material	PBT/nickel silver
Outer sheath, material	PE
External sheath, color	black
Ferrule material	Copper alloy
Ferrule holder color	Blue
Degree of protection	IP20


Drawings

Dimensioned drawing

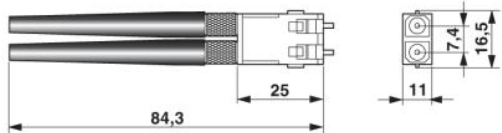

SCRJ plug connector IP20

Schematic diagram

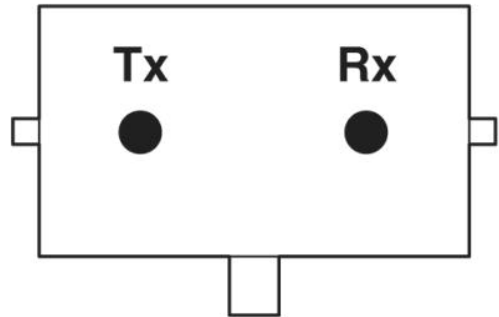

Pin assignment plug SCRJ

Address

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 00
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>



© 2009 Phoenix Contact
Technical modifications reserved;