FRONT-SFL 2,5/F48

32- or 48-position, design F

	(IEC)	rigid	flexible		I	U
	[mm²]	solid	stranded	AWG	[A]	[V]
Connection data		0.2-4	0.2-2.5	24-12	4	250

CUL

Description	Type	Order No.	Pcs. Pkt.
Screw socket strip, design F, 48-position, fully equipped in rows **z, b + d** 32-position, partly equipped in rows **z + b** 32-position, partly equipped in rows **z + d** one 2.5 mm² screw connection per position	**FRONT-SFL 2,5/F48**	**22 85 60 3**	10
	FRONT-SFL 2,5/F32/ZB	**22 85 57 7**	10
	FRONT-SFL 2,5/F32/ZD	**22 85 58 0**	10

Technical data		
Dimensions		see description
Rated surge voltage / contamination class	[kV]/ –	4 / 3
Surge voltage category / insulation material group	– / –	III / I
Stripping length	[mm]	10
Thread		M 2,5
Torque	[Nm]	0.4 - 0.5
Insulation material		PA
Inflammability class acc. to UL 94		V2
Temperature indices RTI/Ti		125/100
Approval data (UL and CSA)		
Nominal voltage / current / conductor sizes	UL: [V] / [A] / AWG	300 / 4 / 30 - 12
	CUL: [V] / [A] / AWG	300 / 4 / 30 - 12

Dimensional drawing

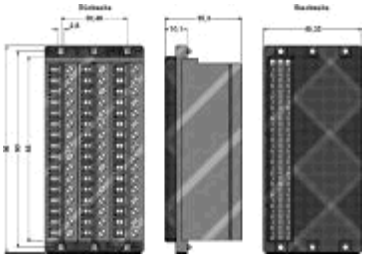
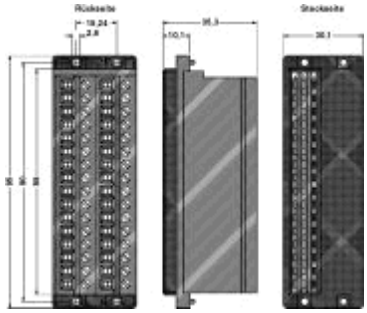
FRONT-SFL 2,5/F48