

## Mounting material - RAD-ANT-VAN-MKT - 2885870

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




Mounting material for wall mounting of omnidirectional antenna with protection against vandals

### Your advantages

- ✓ Mounting material for wall mounting

RoHS

### Key Commercial Data

Packing unit	1 pc
GTIN	 4 046356 126106
GTIN	4046356126106
Weight per Piece (excluding packing)	200.900 g
Custom tariff number	73269098
Country of origin	Germany

### Technical data

#### Dimensions


#### Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values


### Drawings

## Mounting material - RAD-ANT-VAN-MKT - 2885870

Drilling diagram

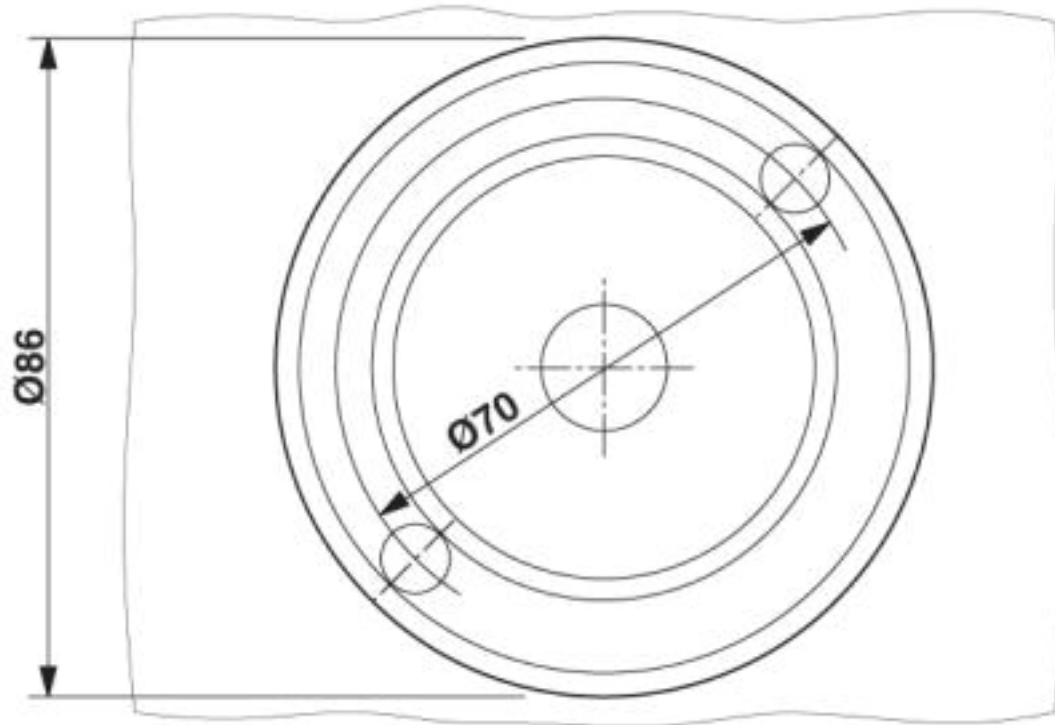

Dimensional drawing

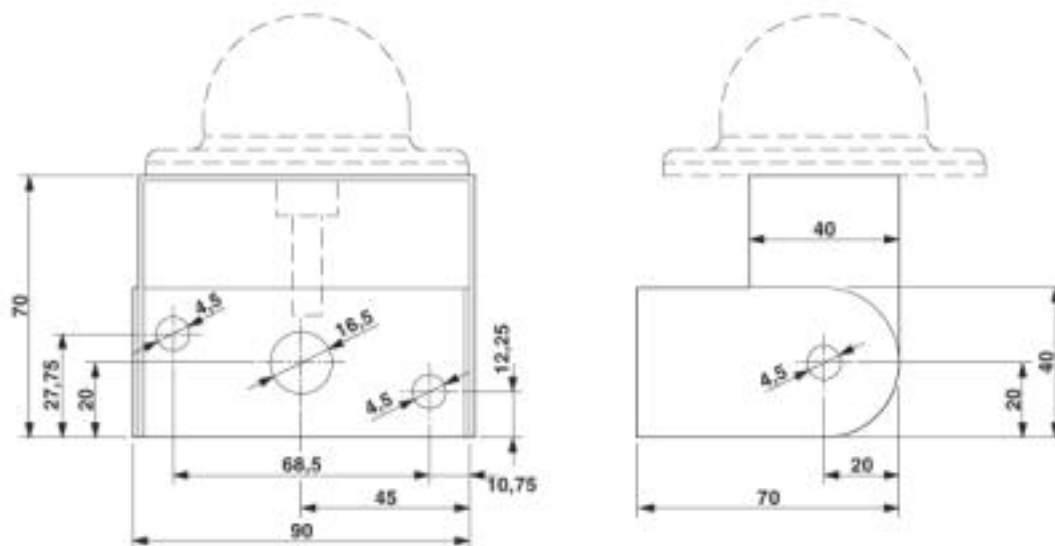

### Classifications

eCl@ss

eCl@ss 4.0	27250300
eCl@ss 4.1	27250300

## Mounting material - RAD-ANT-VAN-MKT - 2885870

### Classifications

#### eCl@ss

eCl@ss 5.0	19070100
eCl@ss 5.1	19070100
eCl@ss 6.0	19179200
eCl@ss 7.0	19179290
eCl@ss 8.0	19179290
eCl@ss 9.0	27379201

#### ETIM

ETIM 2.0	EC000416
ETIM 3.0	EC001698
ETIM 4.0	EC001698
ETIM 5.0	EC002608
ETIM 6.0	EC000310
ETIM 7.0	EC000310

#### UNSPSC

UNSPSC 6.01	43171611
UNSPSC 7.0901	43221706
UNSPSC 11	43171611
UNSPSC 12.01	43221706
UNSPSC 13.2	43222604
UNSPSC 18.0	39121421
UNSPSC 19.0	39121421
UNSPSC 20.0	39121421
UNSPSC 21.0	39121421

### Accessories

#### Accessories

#### Antenna

Antenna - RAD-ISM-2400-ANT-VAN- 3-1-MCX - 2885702



Omnidirectional antenna with protection against vandalism, 2.4 GHz, gain: 3 dBi, polarization: linear, opening angle: h/v 360°/85°, degree of protection: IP55, connection: MCX (male), for control cabinet mounting (optional wall mounting), incl. 1.5 m / 5 ft. connecting cable

## Mounting material - RAD-ANT-VAN-MKT - 2885870

### Accessories

Antenna - RAD-ISM-2400-ANT-VAN- 3-0-SMA - 2885867



Omnidirectional antenna with protection against vandalism, 2.4 GHz, gain: 3 dBi, polarization: linear, opening angle: h/v 360°/85°, degree of protection: IP55, connection: SMA (male), for control cabinet mounting (optional wall mounting), incl. 1.5 m / 5 ft. connecting cable

---

Antenna - RAD-ISM-2400-ANT-VAN-3-0-RSMA - 2701358



Omnidirectional antenna with protection against vandalism, 2.4 GHz, gain: 3 dBi, polarization: linear, opening angle: h/v 360°/85°, degree of protection: IP55, connection: RSMA (male), for control cabinet mounting (optional wall mounting), incl. 1.5 m / 5 ft. connecting cable

---

---