

RC-00000004200

Order No.: 1592589

<http://catalog.phoenixcontact.net/phoenix/treeViewClick.do?UID=1592589>

Panel mounting base, straight, Screw locking, M23, Radial O-ring,
4xM2.5, shielded: Yes, Panel thickness min.: 2.7 mm, Panel thickness
max.: 3.5 mm

Commercial data

EAN	 4 046356 191678
Note	Made-to-order
sales group	D300
Pack	40 Pcs.
Customs tariff	85389099
Gross weight in pieces	0.03443 KG
Net weight per piece	0.02426 KG

Product notes

WEEE/RoHS-compliant since:
01/01/2003



[http://
www.download.phoenixcontact.com](http://www.download.phoenixcontact.com)
Please note that the data given
here has been taken from the
online catalog. For comprehensive
information and data, please refer
to the user documentation. The
General Terms and Conditions of
Use apply to Internet downloads.

Technical data**General**

Note	Order information Order contact inserts separately
Type of locking	Screw locking
Mounting type	4xM2.5

Ambient conditions

Ambient temperature	-20 °C ... 125 °C
Degree of protection	IP67

Material

Housing material	Turned parts: copper zinc alloy (CuZn), die-cast parts: zinc (GD-Zn)
Gasket and O-ring material	FPM

Specifications according to DIN EN 61984:2001

Installation height max.	2000 m
--------------------------	--------

Certificates / Approvals



Certification

Certifications applied for:


Certification Ex:

Drawings

Diagram

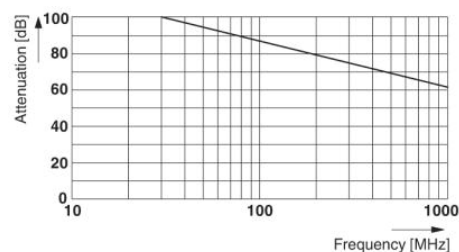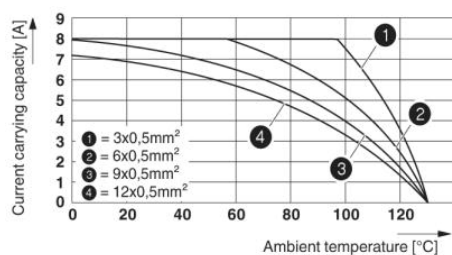

Dimensioned drawing

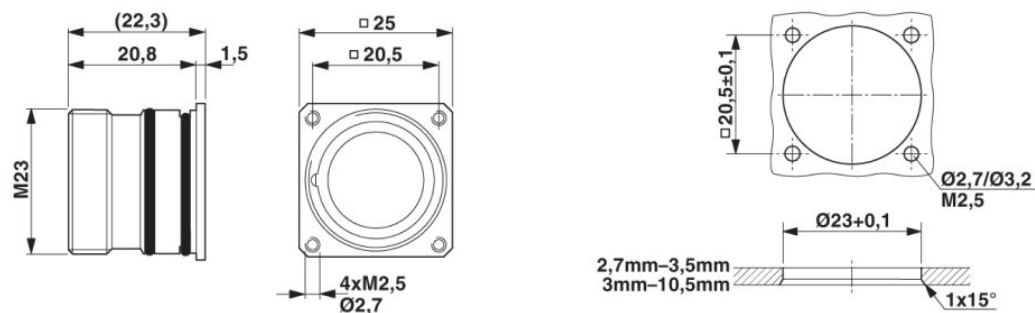

Address

PHOENIX CONTACT Deutschland GmbH
Flachsmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>



© 2014 Phoenix Contact
Technical modifications reserved;