

RC-00000006100

Order No.: 1592604



<http://catalog.phoenixcontact.net/phoenix/treeViewClick.do?UID=1592604>

Panel mounting base, straight, Screw locking, M23, Axial O-ring, Central fixing, shielded: Yes

Commercial data

EAN	 4 046356 191791
Note	Made-to-order
sales group	D300
Pack	40 Pcs.
Customs tariff	85389099
Gross weight in pieces	0.031725 KG
Net weight per piece	0.03174 KG

Product notes

WEEE/RoHS-compliant since:
01/01/2003



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

General

Note	Order information Order contact inserts separately
Type of locking	Screw locking
Mounting type	Central fixing

Ambient conditions

Ambient temperature	-20 °C ... 125 °C
---------------------	-------------------

Degree of protection	IP67
----------------------	------

Material

Housing material	Turned parts: copper zinc alloy (CuZn), die-cast parts: zinc (GD-Zn)
Gasket and O-ring material	FPM

Specifications according to DIN EN 6184:2001

Installation height max.	2000 m
--------------------------	--------

Certificates / Approvals



Certification

Certifications applied for:


Certification Ex:

Drawings

Diagram

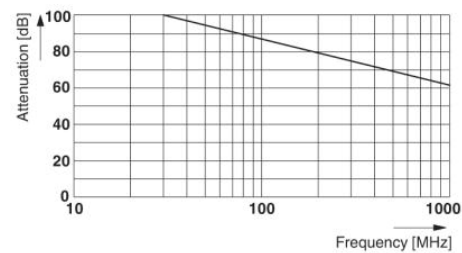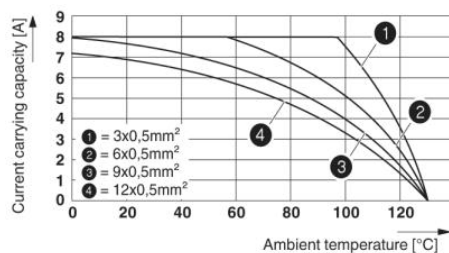

Dimensioned drawing

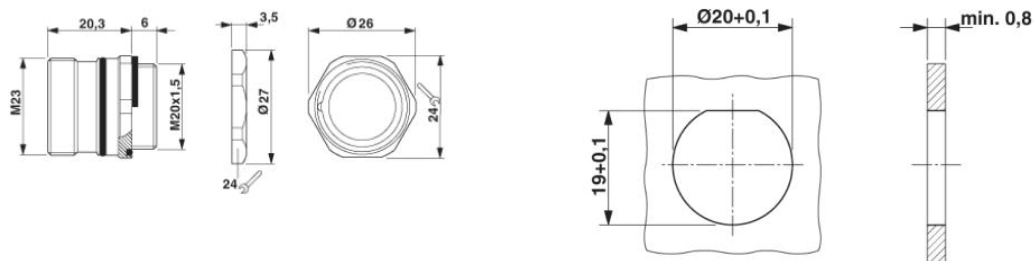

Address

PHOENIX CONTACT Deutschland GmbH
Flachsmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>



© 2014 Phoenix Contact
Technical modifications reserved;