

## SFLY 2,5/D32

Order No.: 2285467



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2285467>

Screw socket, Nominal current: 4 A, Nom. voltage: 250 V, Number of positions: 32, Connection type: Screw connection, Color: green

### Commercial data

|                          |                    |
|--------------------------|--------------------|
| EAN                      | 4017918055943      |
| Pack                     | 10 pcs.            |
| Customs tariff           | 85369010           |
| Weight/Piece             | 0.0877 KG          |
| Catalog page information | Page 532 (CC-2009) |

### Product notes

WEEE/RoHS-compliant since:  
11/09/2007



<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

### Technical data

#### Dimensions / positions

|                     |         |
|---------------------|---------|
| Length              | 39.8 mm |
| Height              | 32.4 mm |
| Width               | 95 mm   |
| Number of positions | 32      |
| Hole diameter       | 2.8 mm  |

|                        |        |
|------------------------|--------|
| Screw thread           | M3     |
| Tightening torque, min | 0.5 Nm |
| Tightening torque max  | 0.6 Nm |

**Technical data**


|                                    |        |
|------------------------------------|--------|
| Insulating material group          | I      |
| Rated surge voltage (III/3)        | 4 kV   |
| Connection in acc. with standard   | EN-VDE |
| Nominal current $I_N$              | 4 A    |
| Nominal voltage $U_N$              | 250 V  |
| Insulating material                | PA     |
| Inflammability class acc. to UL 94 | V2     |
| Stripping length                   | 8 mm   |

**Connection data**

|  |                     |
|--|---------------------|
| Conductor cross section solid min.     | 0.2 mm <sup>2</sup> |
| Conductor cross section solid max.     | 4 mm <sup>2</sup>   |
| Conductor cross section stranded min.  | 0.2 mm <sup>2</sup> |
| Conductor cross section stranded max.  | 2.5 mm <sup>2</sup> |
| Conductor cross section AWG/kcmil min. | 24                  |
| Conductor cross section AWG/kcmil max  | 12                  |

## Drawings

Dimensioned drawing

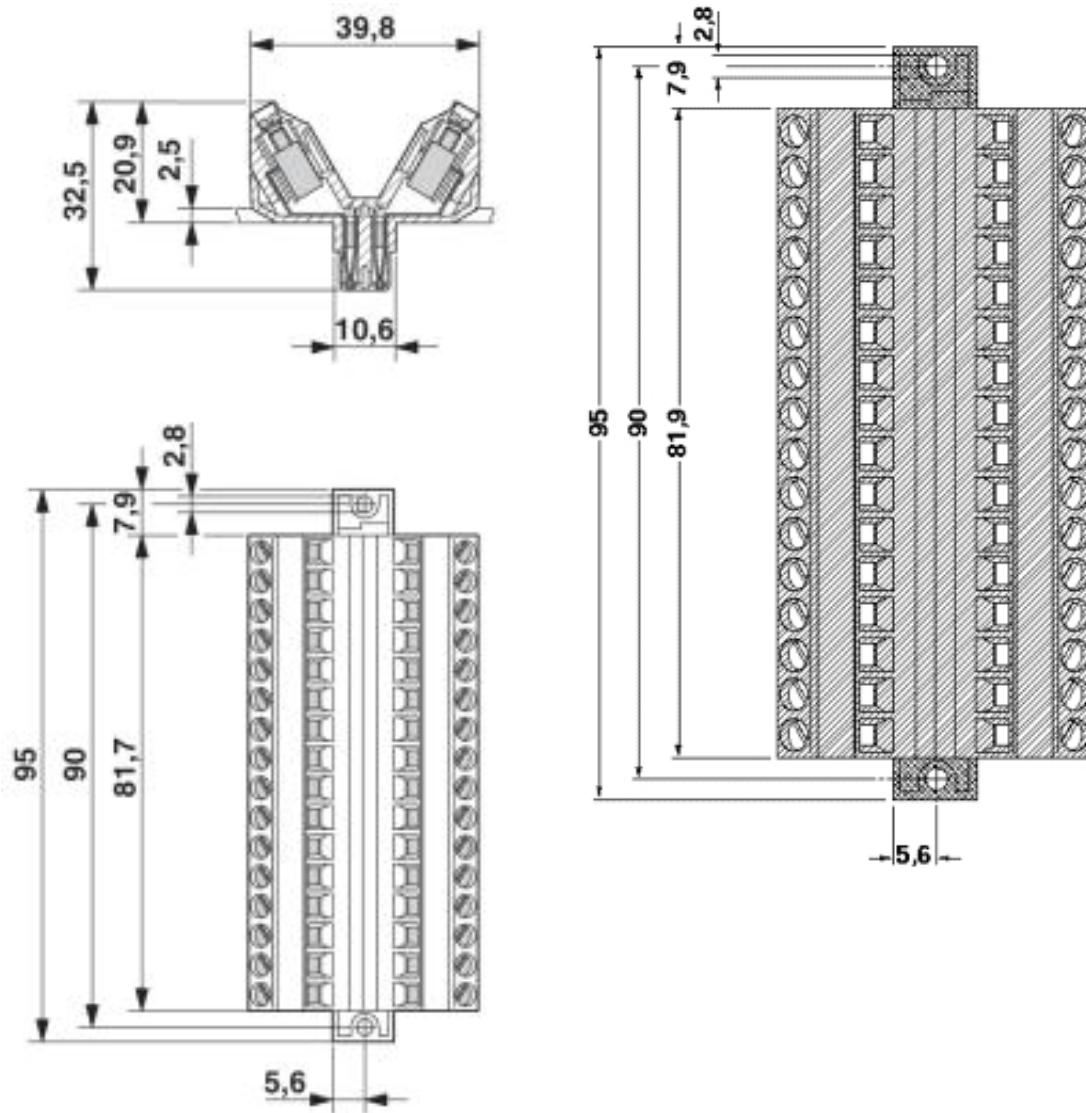

**Address**

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg, Germany  
Phone +49 5235 3 00  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>



© 2009 Phoenix Contact  
Technical modifications reserved;