

VS-MSTBVA 2,5/ 5-GB-5,08-BK-A

Order No.: 1609565

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1609565>

MSTB contact insert, for PCB assembly, 24 V, 5-pos., with straight solder pins, RAL 9005 (black), for panel mounting frame VS-PPC-F2-MSTB-...-1R-P

**Commercial data**

EAN	4046356175876
Pack	50 pcs.
Customs tariff	85366990
Weight/Piece	0.002456 KG
Catalog page information	Page 246 (PC-2009)

Product notes

WEEE/RoHS-compliant since:
01/01/2008



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data**Mechanical characteristics**

Number of positions	5
Insertion/withdrawal cycles	≥ 100
Type of connection	Printed circuit connection
Color	black

Ambient temperature (operation)	-40 °C ... 70 °C
---------------------------------	------------------

Material data

Contact carrier material	PA
Contact material	Copper alloy
Contact surface material	Gold over nickel
Inflammability class acc. to UL 94	V0

Electrical characteristics


Number of positions	5
Rated current	16 A

Accessories

Item	Designation	Description
General		
1608087	VS-PPC-F2-MSTB-MNNA-1R-P	MSTB panel mounting frame, IP67, for push-pull interlocking, metal, for PCB connection, for square panel cutout, with grommet, without mounting screws
1608281	VS-PPC-F2-MSTB-POBK-1R-P	MSTB panel mounting frame, IP67, for push-pull interlocking, plastic, for PCB connection, for square panel cutout, with grommet, without mounting screws


Drawings

Drilling diagram

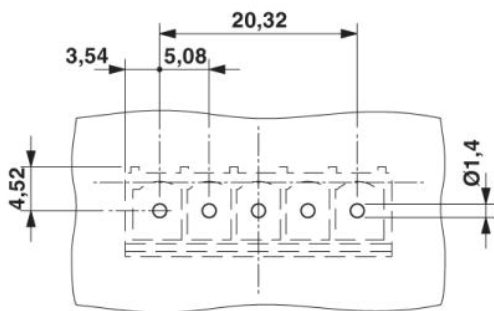

Drilling diagram

Dimensioned drawing

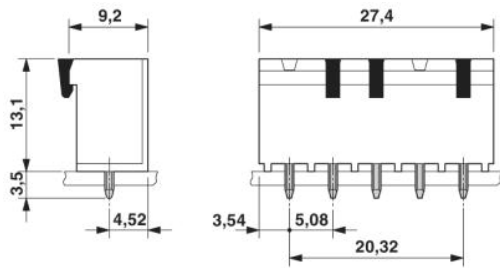

MSTB contact insert

Address

PHOENIX CONTACT GmbH & Co. KG
Flachmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 00
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>



© 2009 Phoenix Contact
Technical modifications reserved;