

## Printed-circuit board connector - MSTBVA 2,5/ 2-G-5,08 GY - 1763993

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)

PCB headers, nominal current: 12 A, rated voltage (III/2): 320 V, nominal cross section: 2.5 mm<sup>2</sup>, number of positions: 2, pitch: 5.08 mm, color: gray, contact surface: Tin, mounting: Wave soldering, pin layout: Linear pinning, solder pin [P]: 3.9 mm



The figure shows a 10-position version of the product

### Your advantages

- ✓ Maximum flexibility when it comes to device design – one header for connectors with different connection technologies
- ✓ Well-known mounting principle allows worldwide use
- ✓ Vertical connection enables multi-row arrangement on the PCB
- ✓ Closed contour for optimum stability of the plug-in connection
- ✓ Easy PCB replacement thanks to plug-in modules



### Key Commercial Data

|                                      |                                                                                                         |
|--------------------------------------|---------------------------------------------------------------------------------------------------------|
| Packing unit                         | 50 pc                                                                                                   |
| Minimum order quantity               | 50 pc                                                                                                   |
| GTIN                                 | <br>4 017918 216733 |
| GTIN                                 | 4017918216733                                                                                           |
| Weight per Piece (excluding packing) | 1.090 g                                                                                                 |
| Custom tariff number                 | 85366930                                                                                                |
| Country of origin                    | Germany                                                                                                 |

### Technical data

#### Dimensions

|              |          |
|--------------|----------|
| Length [ l ] | 8.57 mm  |
| Width        | 12.16 mm |
| Pitch        | 5.08 mm  |
| Dimension a  | 5.08 mm  |
| Width [ w ]  | 12.16 mm |
| Height [ h ] | 15.9 mm  |

## Printed-circuit board connector - MSTBVA 2,5/ 2-G-5,08 GY - 1763993

### Technical data

#### Dimensions

|                          |          |
|--------------------------|----------|
| Height                   | 12 mm    |
| Length of the solder pin | 3.9 mm   |
| Pin dimensions           | 1 x 1 mm |
| Length                   | 8.57 mm  |

#### General

|                                  |                  |
|----------------------------------|------------------|
| Range of articles                | MSTBVA 2,5/...-G |
| Rated voltage (III/3)            | 250 V            |
| Connection in acc. with standard | EN-VDE           |
| Nominal current $I_N$            | 12 A             |
| Color                            | gray             |
| Number of positions              | 2                |

#### Standards and Regulations


|                                  |        |
|----------------------------------|--------|
| Connection in acc. with standard | EN-VDE |
|                                  | CSA    |

#### Environmental Product Compliance

|            |                                                         |
|------------|---------------------------------------------------------|
| China RoHS | Environmentally friendly use period: unlimited = EFUP-e |
|            | No hazardous substances above threshold values          |

### Drawings

Diagram

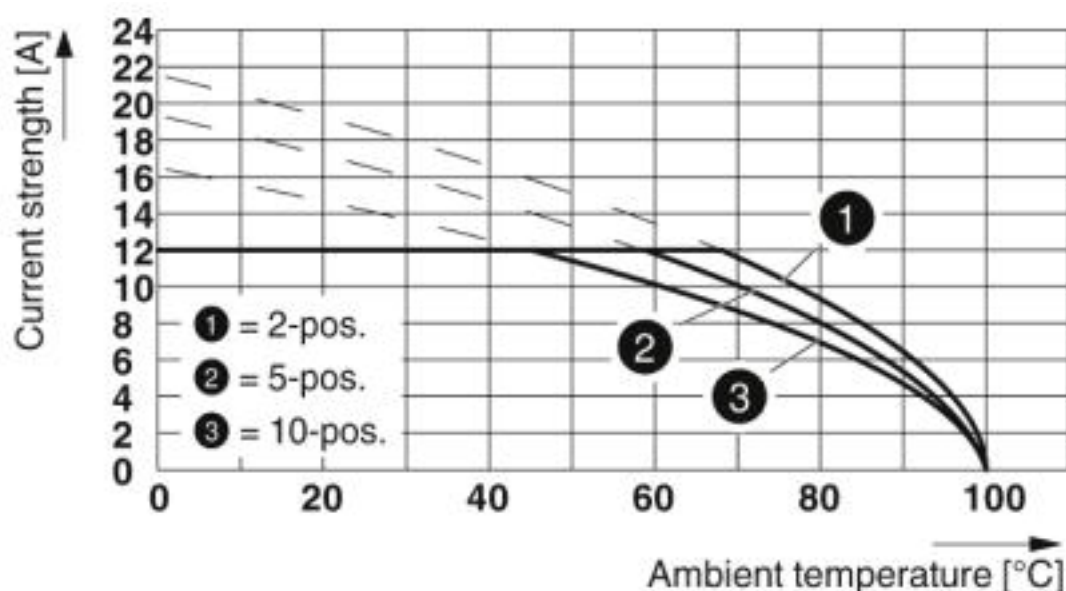

Type: TFKC 2,5/...-ST-5,08 with MSTBVA 2,5/...-G-5,08

## Printed-circuit board connector - MSTBVA 2,5/ 2-G-5,08 GY - 1763993

### Classifications

#### eCl@ss

|            |          |
|------------|----------|
| eCl@ss 4.0 | 27260700 |
| eCl@ss 4.1 | 27260700 |
| eCl@ss 5.0 | 27260700 |
| eCl@ss 5.1 | 27260700 |
| eCl@ss 6.0 | 27260700 |
| eCl@ss 7.0 | 27440402 |
| eCl@ss 8.0 | 27440402 |
| eCl@ss 9.0 | 27440402 |

#### ETIM

|          |          |
|----------|----------|
| ETIM 3.0 | EC001121 |
| ETIM 4.0 | EC002637 |
| ETIM 5.0 | EC002637 |
| ETIM 6.0 | EC002637 |
| ETIM 7.0 | EC002637 |

#### UNSPSC

|               |          |
|---------------|----------|
| UNSPSC 6.01   | 30211810 |
| UNSPSC 7.0901 | 39121409 |
| UNSPSC 11     | 39121409 |
| UNSPSC 12.01  | 39121409 |
| UNSPSC 13.2   | 39121409 |
| UNSPSC 18.0   | 39121409 |
| UNSPSC 19.0   | 39121409 |
| UNSPSC 20.0   | 39121409 |
| UNSPSC 21.0   | 39121409 |

### Approvals

#### Approvals

---

##### Approvals

CSA / IECCEB Scheme / EAC / cULus Recognized / VDE Zeichengenehmigung

---

##### Ex Approvals

---

#### Approval details

## Printed-circuit board connector - MSTBVA 2,5/ 2-G-5,08 GY - 1763993

### Approvals

|                    |                                                                                   |                                                                                                                                         |       |
|--------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------|-------|
| CSA                |  | <a href="http://www.csagroup.org/services-industries/product-listing/">http://www.csagroup.org/services-industries/product-listing/</a> | 13631 |
|                    | B                                                                                 | D                                                                                                                                       |       |
| Nominal voltage UN | 300 V                                                                             | 300 V                                                                                                                                   |       |
| Nominal current IN | 12 A                                                                              | 10 A                                                                                                                                    |       |

|                    |                                                                                   |                                                           |                |
|--------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------|----------------|
| IECEE CB Scheme    |  | <a href="http://www.iecee.org/">http://www.iecee.org/</a> | DE1-60988-B1B2 |
|                    |                                                                                   |                                                           |                |
| Nominal voltage UN | 250 V                                                                             |                                                           |                |
| Nominal current IN | 12 A                                                                              |                                                           |                |

|     |                                                                                    |  |         |
|-----|------------------------------------------------------------------------------------|--|---------|
| EAC |  |  | B.01687 |
|-----|------------------------------------------------------------------------------------|--|---------|

|                    |                                                                                     |                                                                                                                                                       |                 |
|--------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| cULus Recognized   |  | <a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a> | E60425-19931011 |
|                    | B                                                                                   | D                                                                                                                                                     |                 |
| Nominal voltage UN | 300 V                                                                               | 300 V                                                                                                                                                 |                 |
| Nominal current IN | 12 A                                                                                | 10 A                                                                                                                                                  |                 |

|                        |                                                                                     |                                                                                                                                                                                                           |          |
|------------------------|-------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|
| VDE Zeichengenehmigung |  | <a href="http://www2.vde.com/de/Institut/Online-Service/VDE-gepruefteProdukte/Seiten/Online-Suche.aspx">http://www2.vde.com/de/Institut/Online-Service/VDE-gepruefteProdukte/Seiten/Online-Suche.aspx</a> | 40050648 |
|                        |                                                                                     |                                                                                                                                                                                                           |          |
| Nominal voltage UN     | 250 V                                                                               |                                                                                                                                                                                                           |          |
| Nominal current IN     | 12 A                                                                                |                                                                                                                                                                                                           |          |