

VS-PSC 1,5/3-M PE

Order No.: 1689336

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1689336>

POWER-SUBCON header, for mounting side, shielded, color: green

Commercial data

EAN	4017918893187
Pack	10 pcs.
Customs tariff	85366990
Weight/Piece	0.00693 KG
Catalog page information	Page 323 (PC-2009)

Product notesWEEE/RoHS-compliant since:
01/01/2005

<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data**General data**

Note	Only actuate MINI COMBICON plug connectors when under no load condition. If for operating reasons small loads must be switched, experimental values are available upon request.
Ambient temperature (operation)	-20 °C ... 80 °C
Pollution degree	3
Surge voltage category	III

Volume resistance	3 mΩ
Number of positions	3
Insertion/withdrawal cycles	≥ 100
Design	09
Conductor cross section	0.14 mm² ... 1.5 mm²
Connection cross section AWG	28 ... 16

Material data


Inflammability class acc. to UL 94	V0
Contact material	Copper alloy
Contact surface material	Tin-plated
Contact carrier material	PA

Electrical characteristics

Rated voltage (III/3)	250 V
Rated surge voltage	4 kV
Rated current	8 A
Insulation resistance	1 TΩ


Drawings

Drilling diagram

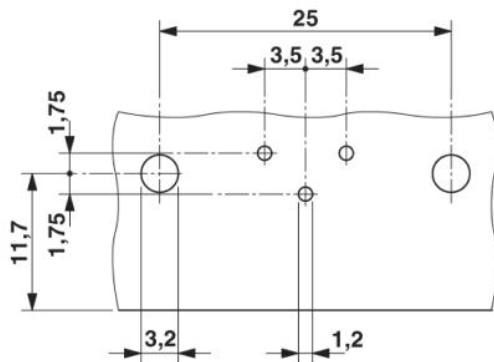

Drilling diagram

Dimensioned drawing

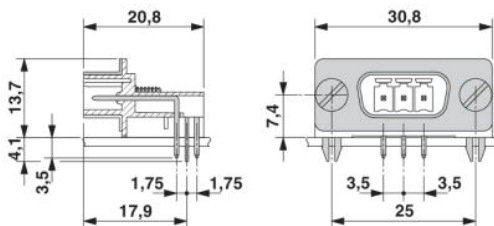

POWER SUBCON contact insert

Address

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 00
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>



© 2009 Phoenix Contact
Technical modifications reserved;