


WE-HCM

SMD High Current Flat Wire Inductor

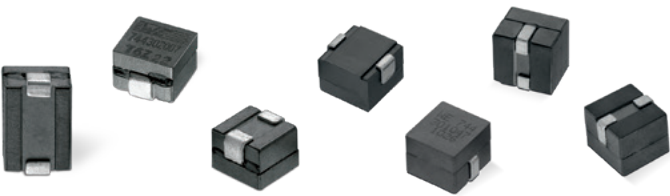

1190		
744 301 025	744 301 033	744 301 047
L: 250 nH	L: 330 nH	L: 470 nH
I _R : 38 A	I _R : 38 A	I _R : 38 A
I _{SAT} : 65 A	I _{SAT} : 46 A	I _{SAT} : 35 A
R _{DC} : 0.320 mΩ	R _{DC} : 0.320 mΩ	R _{DC} : 0.320 mΩ

1050	
744 303 015	744 303 022
L: 155 nH	L: 220 nH
I _R : 31 A	I _R : 31 A
I _{SAT} : 42 A	I _{SAT} : 30 A
R _{DC} : 0.325 mΩ	R _{DC} : 0.325 mΩ

1078		
744 308 102 2	744 308 103 0	744 308 104 0
L: 220 nH	L: 300 nH	L: 400 nH
I _R : 38 A	I _R : 38 A	I _R : 38 A
I _{SAT} : 45 A	I _{SAT} : 32 A	I _{SAT} : 21 A
R _{DC} : 0.290 mΩ	R _{DC} : 0.290 mΩ	R _{DC} : 0.290 mΩ

1052	
744 306 025	744 306 030
L: 250 nH	L: 300 nH
I _R : 25 A	I _R : 25 A
I _{SAT} : 32 A	I _{SAT} : 24 A
R _{DC} : 0.260 mΩ	R _{DC} : 0.260 mΩ

1070		
744 308 025	744 308 033	744 308 040
L: 250 nH	L: 330 nH	L: 400 nH
I _R : 25 A	I _R : 25 A	I _R : 25 A
I _{SAT} : 44 A	I _{SAT} : 30 A	I _{SAT} : 26 A
R _{DC} : 0.370 mΩ	R _{DC} : 0.370 mΩ	R _{DC} : 0.370 mΩ

7050		
744 302 007	744 302 010	744 302 015
L: 72 nH	L: 105 nH	L: 150 nH
I _R : 30 A	I _R : 30 A	I _R : 30 A
I _{SAT} : 60 A	I _{SAT} : 45 A	I _{SAT} : 32 A
R _{DC} : 0.235 mΩ	R _{DC} : 0.235 mΩ	R _{DC} : 0.235 mΩ

1078			
744 308 101 0	744 308 101 2	744 308 101 5	744 308 101 8
L: 100 nH	L: 120 nH	L: 150 nH	L: 180 nH
I _R : 38 A	I _R : 38 A	I _R : 38 A	I _R : 38 A
I _{SAT} : 100 A	I _{SAT} : 85 A	I _{SAT} : 67 A	I _{SAT} : 60 A
R _{DC} : 0.290 mΩ	R _{DC} : 0.290 mΩ	R _{DC} : 0.290 mΩ	R _{DC} : 0.290 mΩ

1350		
744 305 022	744 305 033	744 305 040
L: 220 nH	L: 330 nH	L: 400 nH
I _R : 26 A	I _R : 26 A	I _R : 26 A
I _{SAT} : 42 A	I _{SAT} : 26 A	I _{SAT} : 20 A
R _{DC} : 0.155 mΩ	R _{DC} : 0.155 mΩ	R _{DC} : 0.155 mΩ

7070		
744 307 012	744 307 016	744 307 022
L: 120 nH	L: 160 nH	L: 220 nH
I _R : 26 A	I _R : 26 A	I _R : 26 A
I _{SAT} : 48 A	I _{SAT} : 41 A	I _{SAT} : 29 A
R _{DC} : 0.290 mΩ	R _{DC} : 0.290 mΩ	R _{DC} : 0.290 mΩ

1070	
744 308 015	744 308 020
L: 150 nH	L: 200 nH
I _R : 25 A	I _R : 25 A
I _{SAT} : 58 A	I _{SAT} : 48 A
R _{DC} : 0.370 mΩ	R _{DC} : 0.370 mΩ

1390			
744 309 012	744 309 025	744 309 033	744 309 047
L: 120 nH	L: 250 nH	L: 330 nH	L: 470 nH
I _R : 47.5 A	I _R : 47.5 A	I _R : 47.5 A	I _R : 47.5 A
I _{SAT} : 125 A	I _{SAT} : 81 A	I _{SAT} : 62.5 A	I _{SAT} : 40.5 A
R _{DC} : 0.165 mΩ	R _{DC} : 0.165 mΩ	R _{DC} : 0.165 mΩ	R _{DC} : 0.165 mΩ

EMC COMPONENTS | **INDUCTORS** | TRANSFORMERS | RF COMPONENTS | CIRCUIT PROTECTION | EMC SHIELDING MATERIAL | LEDs | CONNECTORS | SWITCHES | ASSEMBLY TECHNIQUE | REDCUBE TERMINALS | CAPACITORS

Important information: Würth Elektronik's design kits contain reference components. These components correspond with the current product development status on the day of supply. Exchange of the reference components to components with up-to-date product development status is not carried out automatically. No liability is taken for the use of these reference components. Therefore, please request new samples prior to releases for series production and product release.

Please check datasheets on www.we-online.com for specifications. Würth Elektronik eiSos GmbH & Co. KG, EMC & Inductive Solutions. © 2018

www.we-online.com

All products
ex stock!