


DESIGN KIT

WE-RCIT Rodcore Inductor THT

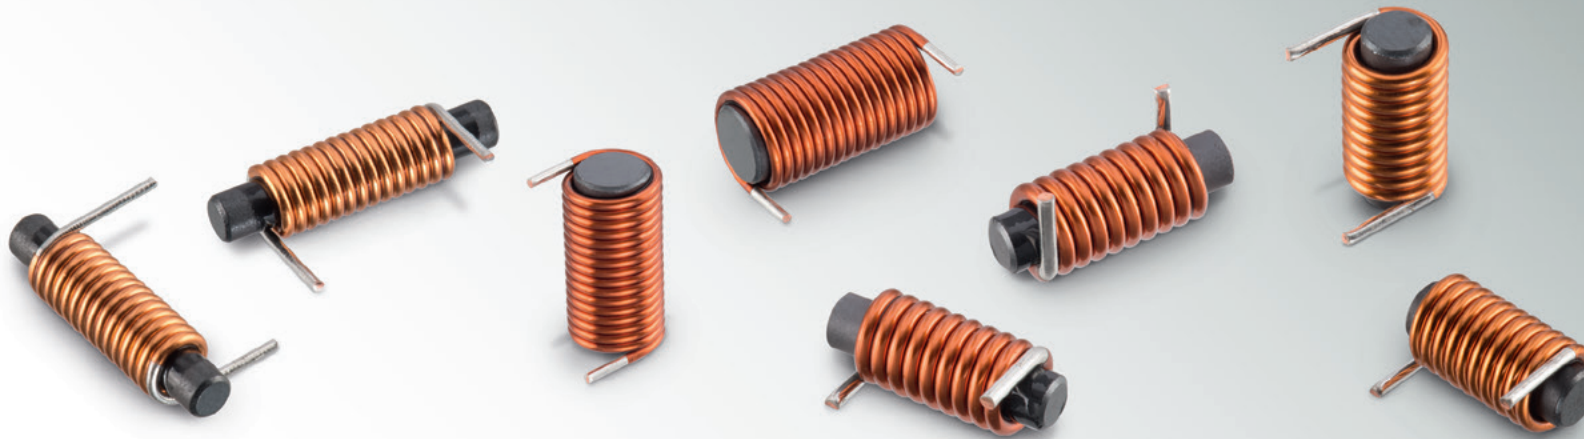


TECHNICAL DATA:

L:	2.0 – 10.0 μ H
I _r :	2.5 – 15 A
R _{DC} :	1.7 – 33 m Ω
Freq:	0.01 – 90 MHz

Order Code 784 713
Version 1.0

DESIGN KIT

WE-RCIT Rodcore Inductor THT

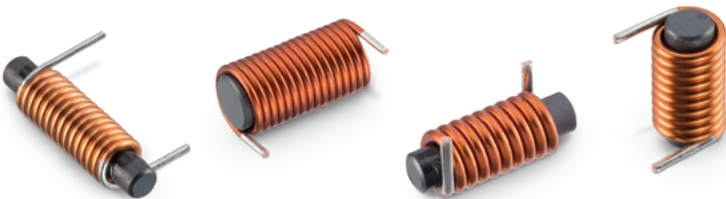

784 711 002 0

L:	2 μ H
I _r :	2.5 A
R _{DC} :	11 m Ω
Freq:	236.7 MHz

784 711 102 0

L:	2 μ H
I _r :	5 A
R _{DC} :	6.5 m Ω
Freq:	149.6 MHz

784 712 102 0

L:	2 μ H
I _r :	10 A
R _{DC} :	3.8 m Ω
Freq:	95 MHz

784 713 102 0

L:	2 μ H
I _r :	15 A
R _{DC} :	1.7 m Ω
Freq:	178.7 MHz

784 712 006 0

L:	6 μ H
I _r :	2.5 A
R _{DC} :	22 m Ω
Freq:	95 MHz

784 712 106 0

L:	6 μ H
I _r :	5 A
R _{DC} :	11.7 m Ω
Freq:	80 MHz

784 713 106 0

L:	6 μ H
I _r :	10 A
R _{DC} :	15.3 m Ω
Freq:	149.6 MHz

784 713 206 0

L:	6 μ H
I _r :	15 A
R _{DC} :	3.5 m Ω
Freq:	80 MHz

784 711 110 0

L:	10 μ H
I _r :	2.5 A
R _{DC} :	33 m Ω
Freq:	63.7 MHz

784 712 110 0

L:	10 μ H
I _r :	5 A
R _{DC} :	15.1 m Ω
Freq:	120 MHz

784 713 110 0

L:	10 μ H
I _r :	10 A
R _{DC} :	8.8 m Ω
Freq:	56.6 MHz

784 713 210 0

L:	10 μ H
I _r :	15 A
R _{DC} :	5.7 m Ω
Freq:	42.4 MHz

EMC COMPONENTS | **INDUCTORS** | TRANSFORMERS | RF COMPONENTS | CIRCUIT PROTECTION | EMC SHIELDING MATERIAL | LEDs | CONNECTORS | SWITCHES | ASSEMBLY TECHNIQUE | REDCUBE TERMINALS | CAPACITORS

Important information: Würth Elektronik's design kits contain reference components. These components correspond with the current product development status on the day of supply. Exchange of the reference components to components with up-to-date product development status is not carried out automatically. No liability is taken for the use of these reference components. Therefore, please request new samples prior to releases for series production and product release.

Please check datasheets on www.we-online.com for specifications. Würth Elektronik eiSos GmbH & Co. KG, EMC & Inductive Solutions. © 2018

www.we-online.com

All products
ex stock!