
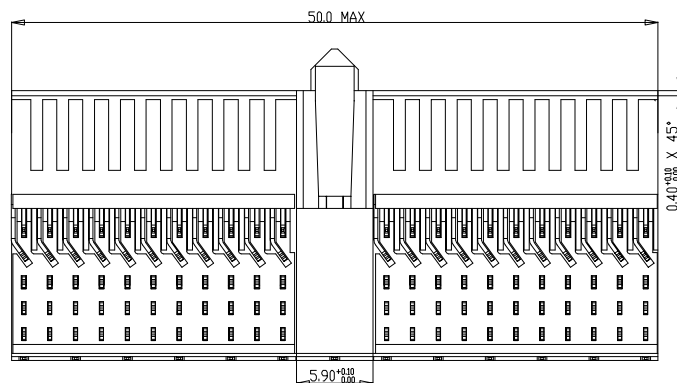
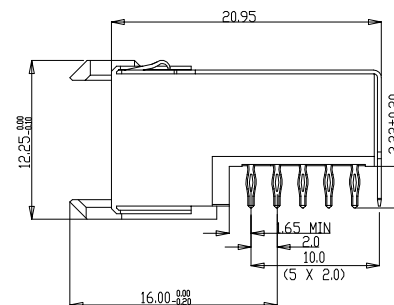


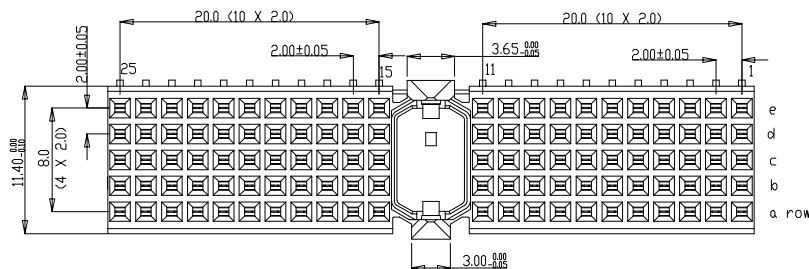

PERFORMANCE CHARACTERISTICS

CURRENT RATING 1.5 A AT 20°C (FULLY LOADED)
1 A AT 70°C (FULLY LOADED)

RATED VOLTAGE 500V AC (CONT / CONT)

OPERATING TEMPERATURE -55°C TO 125°C

CONTACT RESISTANCE 20 MΩ MAX

INSERTION FORCE :0.75 N MAX /CONT


EXTRACTION FORCE: 0.15 N MIN /CONT

INSULATION RESISTANCE :10⁴ MΩ MIN

NOTES

- LEAD FREE INDICATOR : LF- LEAD FREE
- PERFORMANCE LEVEL INDICATOR
(REF DWG No. BS,C,201844,003)
- THIS PRODUCT IS CSA APPROVED
THIS PRODUCT IS UL RECOGNISED
- FOR RECOMMENDED PTH DIMENSIONS REFER DRAWING: BSA,201,572001
THIS PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVE
AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.

LAY OUT
P.C.B.-HOLE

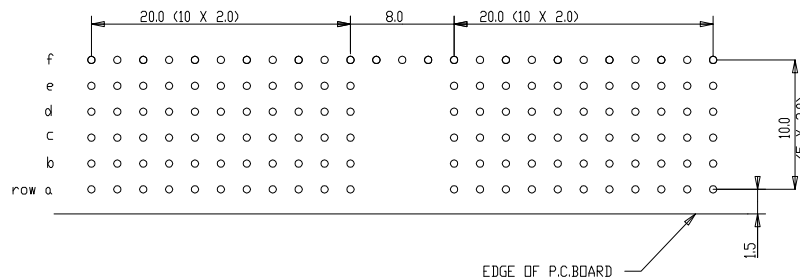

Material				Spec ref			
Mat code				tolerance			
Heat treat				projection			
Plating/Finish				MM			
rev	ecn no	dr	date	Dr	30 03 99	M.Fret	
A	CONV	KN	14-9-98	Eng			
B	105-0681	ALEX	21/05/05	Chr			
C	3005-0278	Keson	02/08/05	Appr			
D	3007-0362	Keson	05/09/07				
E	3010-0010	NZ	10/13/10				
-	-	-	-				
FCI				MPACS 5+2R RA RCP			
Pro/E file				CONN TYPE A			
catalog no				HMER10PA510B----			
				CUSTOMER DRAWING			
				sheet 1 of 1			

PDM: Rev!E

STATUS: Released

Printed: Mar 15, 2011