

Shielded SMD Power Inductors **multicomp**^{PRO}

**RoHS
Compliant**



Features

- Directly connected electrode on ferrite core
- High power, High saturation inductors
- Ideal inductors for DC/DC converters
- With magnetically shielded against radiation
- Available on tape and reel for automatic surface mounting.


Applications

- Power Supply for VTRs
- LCD Televisions
- Notebook PCs
- Portable Communication
- DC/DC Converters, etc.

Characteristics

- Rated DC current: The current when the inductance becomes 35% lower than its initial value or the actual current when the temperature of coil increases to $\Delta T=40^{\circ}\text{C}$. The smaller one is defined as Rated DC Current. ($T_a=25^{\circ}\text{C}$)
- Operating temperature range: -40°C to 125°C

Shielded SMD Power Inductor

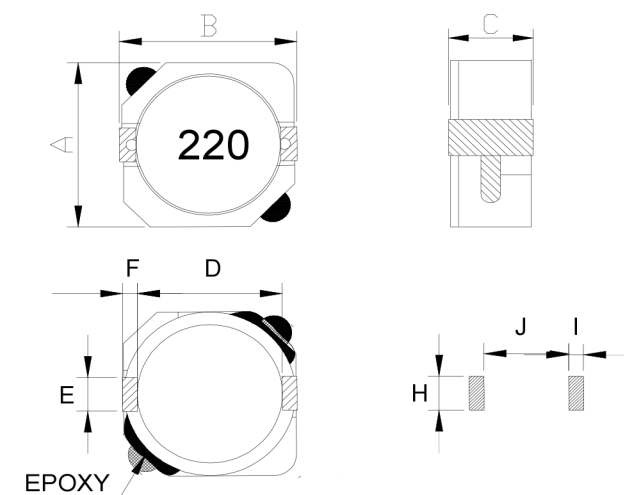

Dimensions

Unit: mm


Case Code	A max.	B max.	C max.	D	E	F	H	I	J
1004	10.3	10.4	4	7.7	3	1.2	3.2	1.6	7.3

Newark.com/multicomp-pro
Farnell.com/multicomp-pro
Element14.com/multicomp-pro

multicomp^{PRO}

Shielded SMD Power Inductors **multicomp**PRO

Tape and Reel specifications

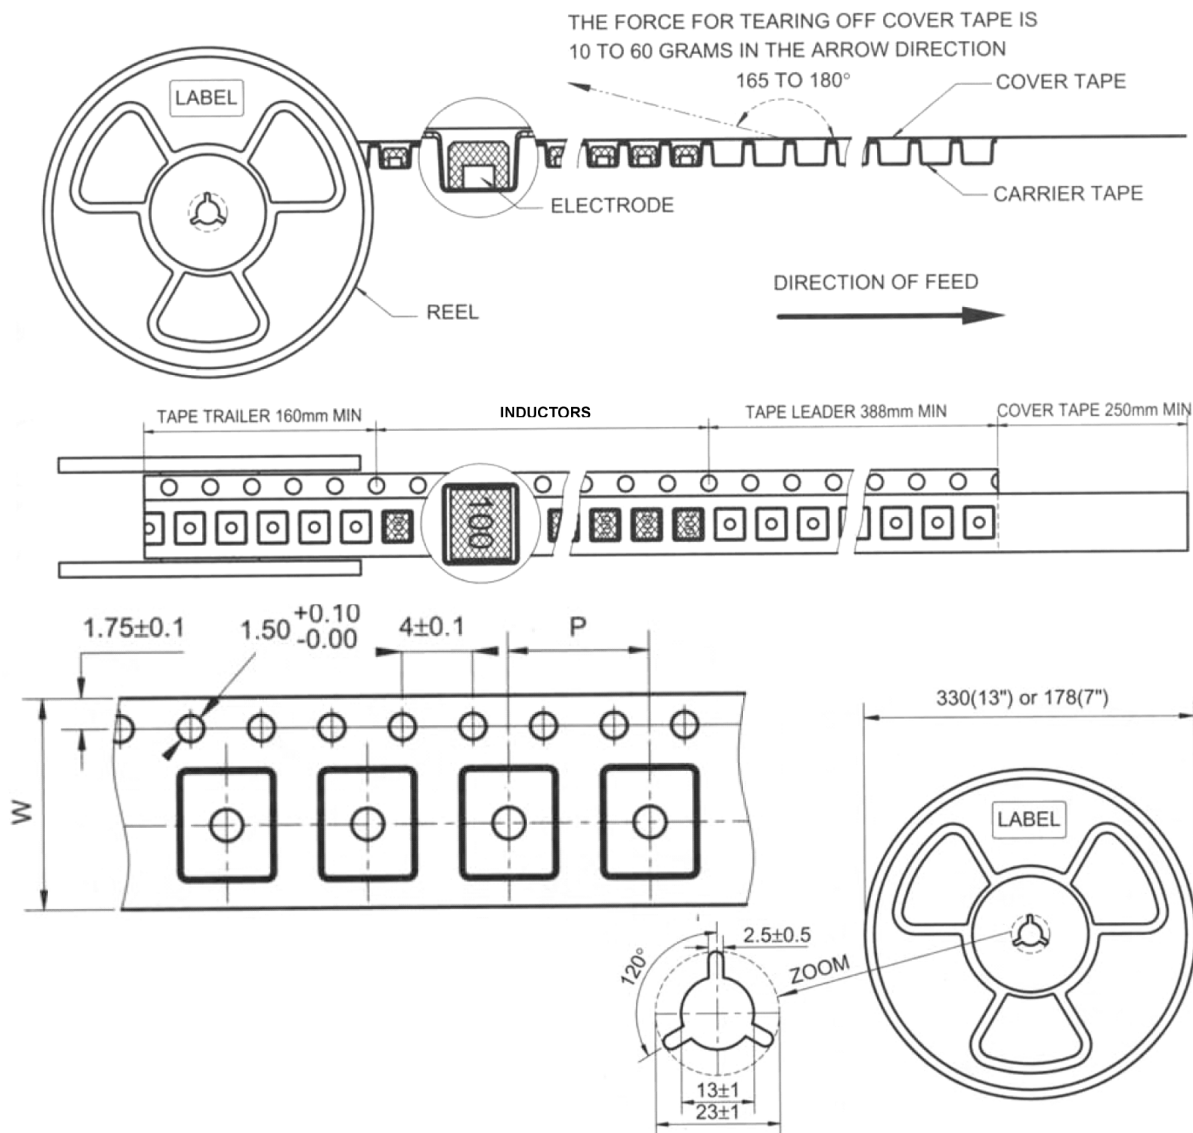

Unit: mm

Case Code	Tape size		Parts Per Reel
	W	P	
1004	24	16	750

Shielded SMD Power Inductors **multicomp**PRO

SMD Power Inductor Environmental Specifications

General

Items	Specifications
Shelf Storage conditions	Temperature range: 15°C to 28°C ; Humidity: <80% relative humidity. Recommended product should be used within one year from the time of delivery.

Environmental test


Test Items	Specifications	Test Conditions / Test Methods
High temperature Storage test	No case deformation or change in appearance. $\Delta L/L \leq 10\%$	Temperature $85 \pm 2^\circ\text{C}$, Time: 48 ± 2 hours, Tested after 1 hour at room temperature.
Low temperature Storage test		Temperature $-40 \pm 2^\circ\text{C}$, Time: 48 ± 2 hours, Tested after 1 hour at room temperature.
Humidity test		Temperature $40 \pm 2^\circ\text{C}$, 90% to 95% relative humidity Time: 96 ± 2 hours Tested after 1 hour at room temperature.
Thermal shock test		First -25°C 30 minutes then 25°C 10 minutes last 85°C 30 minutes, as 1 cycle. Go through 5 cycles. Tested after 1 hour at room temperature.

Mechanical test

Test Items	Specifications	Test Conditions / Test Methods
Solderability test	Terminal area must have 90% minimum solder coverage.	Product with Lead-free terminal: Dip pads in flux then dip in solder pot at $245 \pm 5^\circ\text{C}$ for 3 seconds.
Resistance to Soldering Heat	No case deformation or change in appearance.	Flux should cover the whole of the sample before heating, then be preheated for about 2 minutes over temperature of 130°C to 150°C . Immersing to $260 \pm 5^\circ\text{C}$ for 10 seconds.
Vibration test	No case deformation or change in appearance. $\Delta L/L \leq 10\%$	Apply frequency 10Hz to 55Hz. 1.5mm amplitude in each of perpendicular direction for 2 hours.
Shock resistance		Drop down with 981m/s^2 (100G) shock attitude upon a rubber block method shock testing machine, for 1 time. In each of three orientations.

Shielded SMD Power Inductors **multicomp**PRO

The condition of reflow (recommendation)

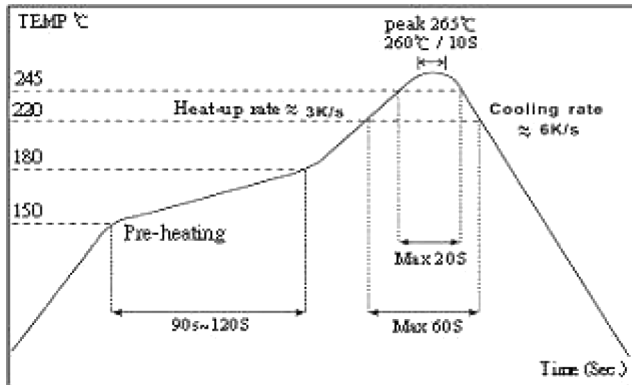

Electrical Characteristics

Part No	Case Code	L (μ H)	Tolerance	Test Condition	DCR (m Ω) max.	IDC (A) max.
MP002866	1004	10	20%	100kHz, 0.1V	35	4.4
MP002867		22			73	2.9
MP002868		33			93	2.3
MP002869		47			128	2.1
MP002870		150			506	1.15

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.