

Shielded Molding SMD Power Inductors

multicompPRO

**RoHS
Compliant**



Features


- Large current adaptable
- Footprint compatible with most standard
- Lower temperature rise at large current
- Low profile, low DCR
- Available on tape and reel for auto surface mounting

Applications

- Laptop / Desktop / Notebook Computers
- Terminals / Portable Servers / Workstation
- DC/DC Converter in Distributed Power Systems or VRM Applications
- Thin Type On-board Power Supply Module for Exchanger

Characteristics

- Saturation Rated Current would cause inductance to drop approximately 25%(0402 drop approximately 30%)
- Temperature Rise Current would cause an approximately ΔT of 40°C
- All test data is referred to 25°C ambient

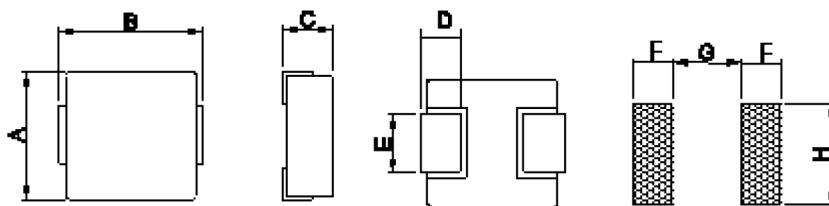

Dimensions

Unit: mm

Case Code	A	B	C max.	D	E	F	G	H
0420	4.1±0.5	4.5±0.5	2.1	0.8±0.5	2±0.5	1.5	2.5	2.2
0530	5.0±0.5	5.5±0.5	3	1.2±0.5	2±0.5	2	3	2.5
0630	6.8 max	7.6 max	3	1.6±0.5	2.9±0.5	2.5	3.7	3.5


Newark.com/multicomp-pro
Farnell.com/multicomp-pro
Element14.com/multicomp-pro

multicompPRO

Shielded Molding SMD Power Inductors

multicompPRO

Tape and Reel specifications

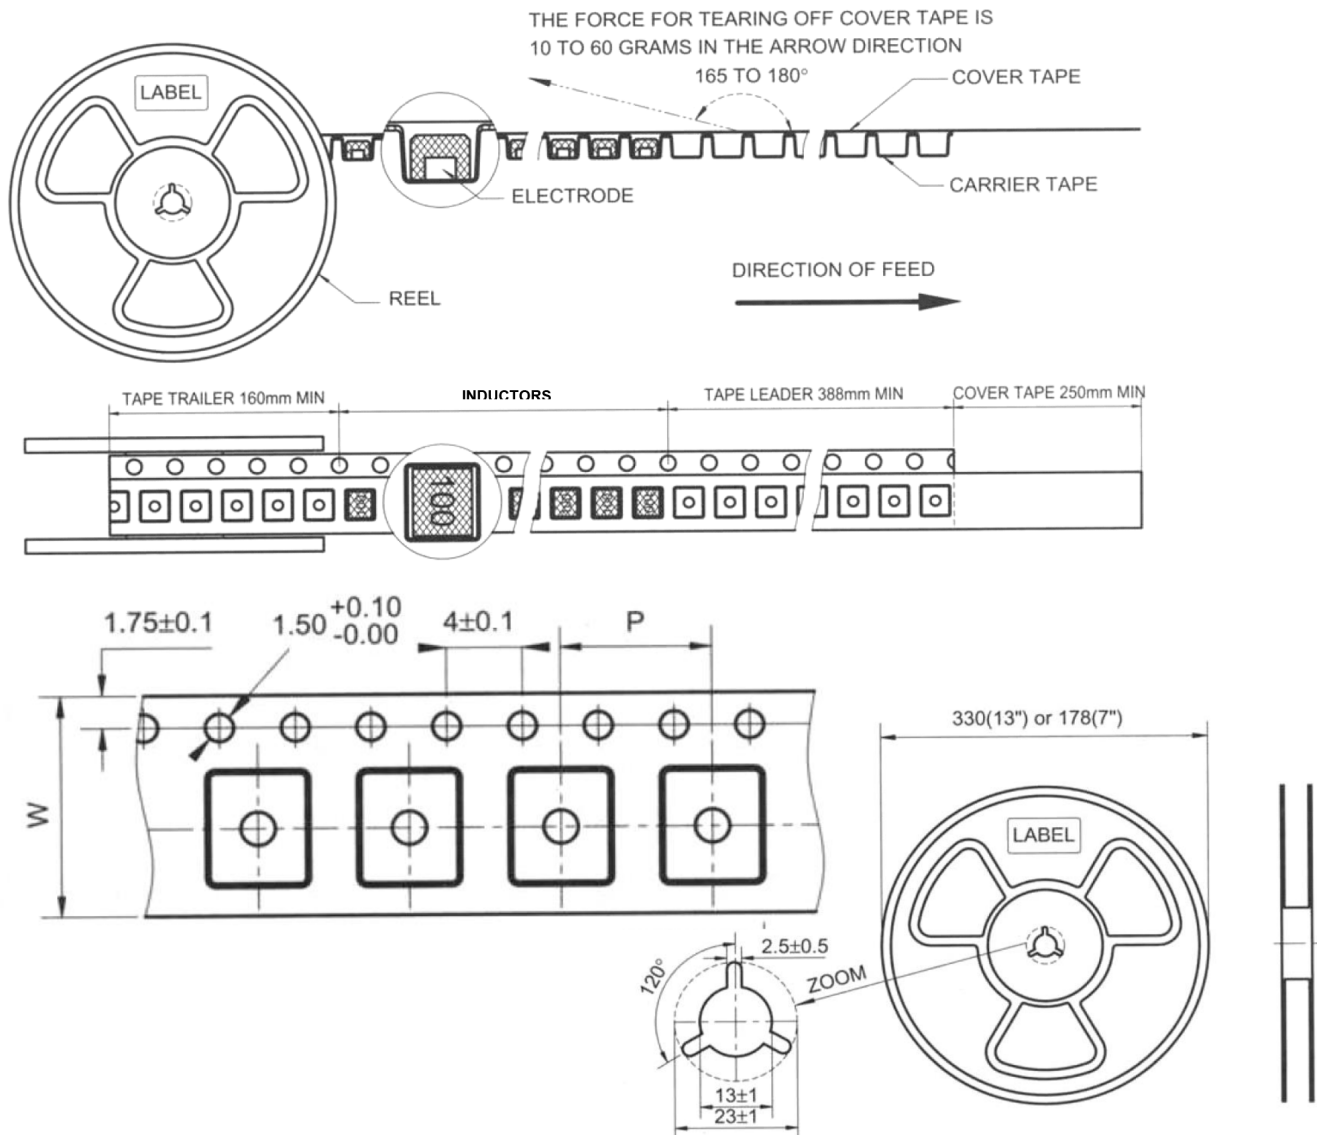

multicompPRO

Shielded Molding SMD Power Inductors

multicompPRO

Unit: mm

Case Code	Tape size		Parts Per Reel
	W	P	13"
0420	12	8	3500
0530	12	8	2500
0630	16	12	1500

General Characteristics


Operating temperature range:: -40°C to 125°C

Item	Requirement	Test Method		
Solderability	More than 90% of the terminal electrode should be covered with solder	230±5°C for 4±1 seconds		
Solder Heat Resistance	Inductance within±20% of initial value No disconnection or short circuit The appearance shall not break	260±5°C for 10±1 seconds		
Heat Resistance		Temperature: 125±5°C Time: 500 hours Tested after 2 hour at room temperature		
Cold Resistance		Temperature: -40±5°C Time: 500 hours Tested after 2 hour at room temperature		
Thermal Shock		One cycle:		
		Step	Temperature(°C)	Time (min.)
		1	-40±5°C	30
		2	Room temperature	3
		3	125±5°C	30
		4	Room temperature	3
Humidity Resistance		Temperature: 40±2°C, 90~95% relative humidity Time: 500 hours Tested after 2 hour at room temperature		
Vibration Test	Inductance within±5% of initial value The appearance shall not break	After vibration for 1 hour, in each of three orientations at sweep vibration (10~55~10Hz) with 1.52mm P-P amplitudes		

Shielded Molding SMD Power Inductors

multicompPRO

The condition of reflow (recommendation):

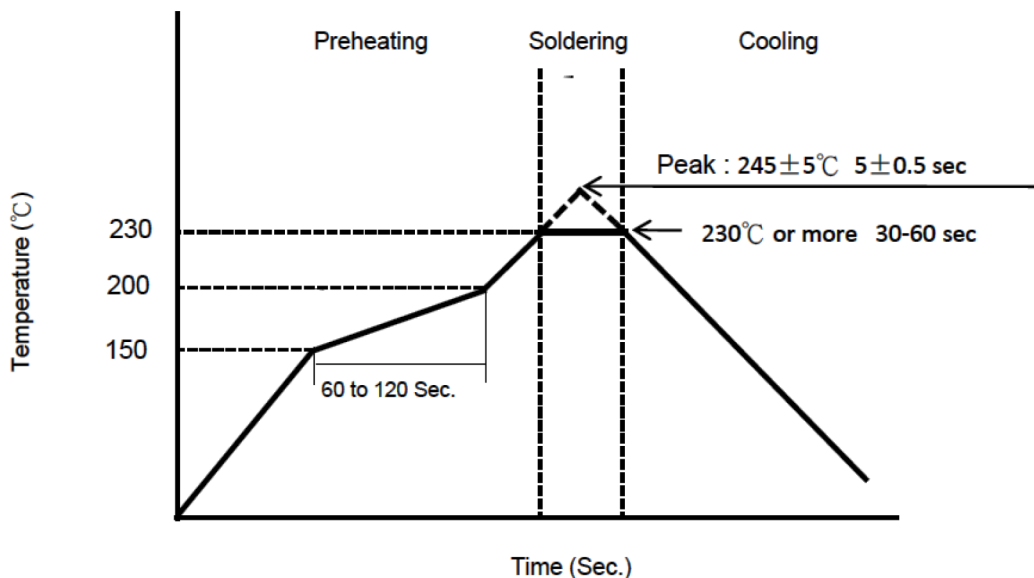

Electrical Characteristics

Operating temperature range:: -40°C to 125°C

Part No	Case Code	Inductance (μH)	Tolerance	Test Condition	DCR (mΩ) max.	Saturation Current (A) Max.	Temperature Rise Current (A) Max.
MP002761	0420	1	20%	100kHz, 0.25V	27	7	4.5
MP002762		1.5			46	6	4
MP002763		2.2			58	5	3
MP002764	0530	0.22			4.52	21	15.5
MP002765		0.47			7.04	16	12.2
MP002766		1.5			20.7	11	7.2
MP002767		2.2			29.2	10	5.8
MP002768	0630	4.7			77.5	8.2	3.5
MP002769		2.2			20	14	8
MP002770		4.7			40	10	5.5
MP002771		6.8			60	8	4.5
MP002772		10			105	7	3

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

Newark.com/multicomp-pro
Farnell.com/multicomp-pro
Element14.com/multicomp-pro

multicompPRO