



Features

- Compact, low profile with low DCR and large current
- With magnetically shielded against radiation
- Flat bottom surface allows reliable mounting onto the board
- Available on tape and reel for auto surface mounting


Applications

- Portable Telephones
- Personal Computers
- DC/DC Converters, etc.
- Other Various Electronic Appliances


Characteristics

- Saturation Rated Current (I_{sat}): The current when the inductance becomes 30% lower than its nominal value. ($T_a=25^{\circ}\text{C}$)
- Temperature Rated Current (I_{rms}): The actual current when the temperature of coil becomes to $\Delta 40^{\circ}\text{C}$. ($T_a=25^{\circ}\text{C}$)
- Operating temperature range: -40°C to 125°C

Case Code-0745 / 1045

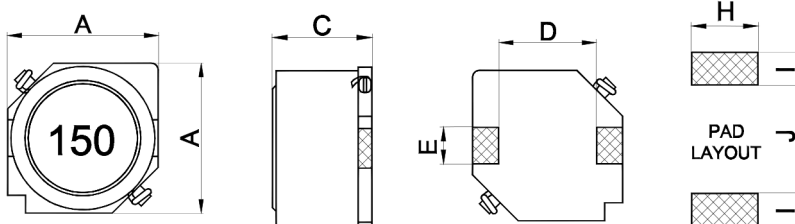

Case Code-0628 / 1255 / 1275

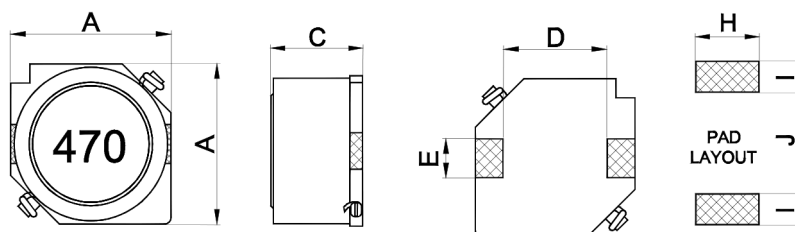


Shielded SMD Power Inductors **multicomp**PRO

Dimensions

Unit:mm

Case Code	A	C	D	E	H	I	J
0628	6.±0.2	2.8±0.2	4	2	2.2	1.5	4
0745	7.±0.2	4.5±0.3	4	2	2.2	1.5	4
1045	10.1±0.3	4.5±0.3	6	3	3.2	2.5	5.6
1255	12.5±0.3	5.5±0.35	8.6	3	3.2	2.5	8.6
1275	12.5±0.3	7.5±0.35	8.6	3	3.2	2.5	8.6

Tape and Reel specifications

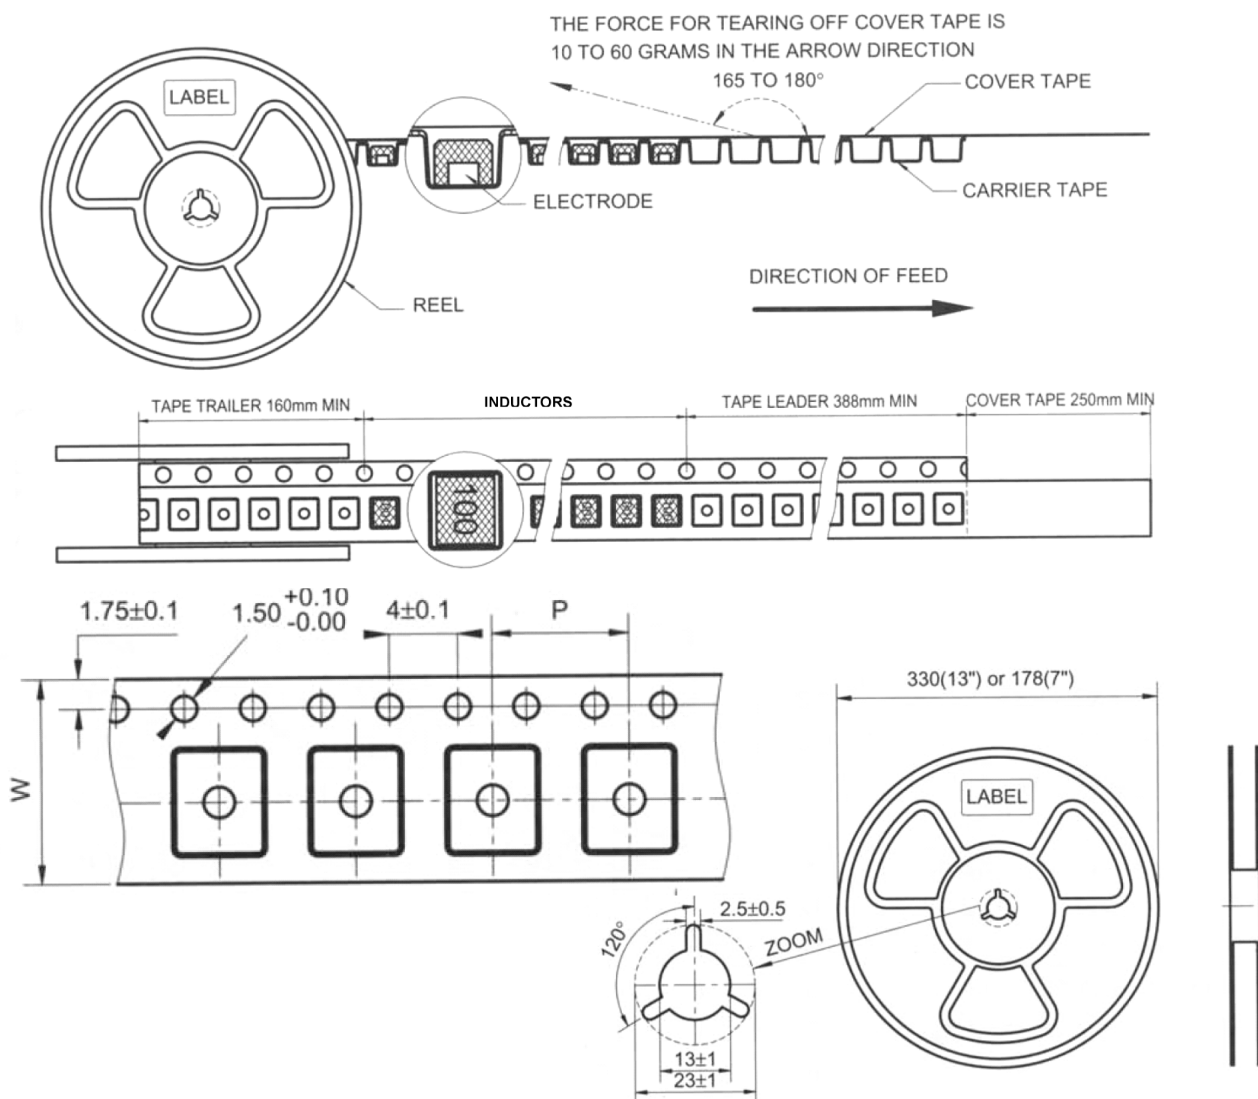

Case Code	Tape size		Parts Per Reel
	W	P	13"
0628	16	12	1000
0745			
1045	24	16	750
1255			350
1275			

General

Items	Specifications
Shelf Storage conditions	Temperature range: 15°C to 28°C ; Humidity: <80% relative humidity. Recommended product should be used within one year from the time of delivery.


Environmental test

Test Items	Specifications	Test Conditions / Test Methods
High temperature Storage test	No case deformation or change in appearance. $\Delta L/L \leq 10\%$	Temperature 85±2°C, Time: 48±2 hours, Tested after 1 hour at room temperature.
Low temperature Storage test		Temperature -40±2°C, Time: 48±2 hours, Tested after 1 hour at room temperature.
Humidity test		Temperature 40±2°C, 90% to 95% relative humidity Time: 96±2 hours Tested after 1 hour at room temperature.
Thermal shock test		First -25°C 30 minutes then 25°C 10 minutes last 85°C 30 minutes, as 1 cycle. Go through 5 cycles. Tested after 1 hour at room temperature.

Mechanical test

Test Items	Specifications	Test Conditions / Test Methods
Solderability test	Terminal area must have 90% minimum solder coverage.	Product with Lead-free terminal: Dip pads in flux then dip in solder pot at 245±5°C for 3 seconds.
Resistance to Soldering Heat	No case deformation or change in appearance.	Flux should cover the whole of the sample before heating, then be preheated for about 2 minutes over temperature of 130°C to 150°C. Immersing to 260±5°C for 10 seconds.
Vibration test	No case deformation or change in appearance. $\Delta L/L \leq 10\%$	Apply frequency 10Hz to 55Hz. 1.5mm amplitude in each of perpendicular direction for 2 hours.
Shock resistance		Drop down with 981m/s ² (100G) shock attitude upon a rubber block method shock testing machine, for 1 time. In each of three orientations.

The condition of reflow (recommendation)

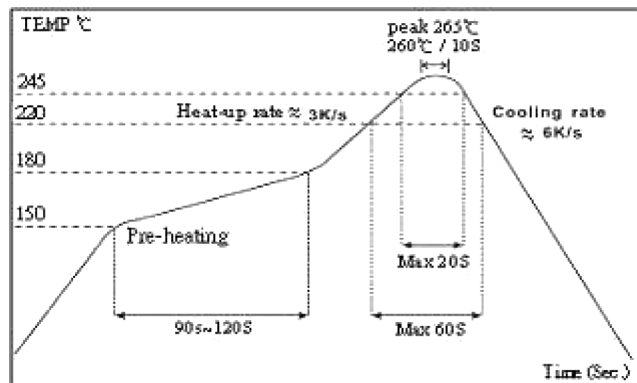

Electrical Characteristics

Part No	Case Code	L (μ H)	Tolerance	Test Condition	DCR (Ω) $\pm 20\%$	IDC (A) max.	
						I sat	I rms
MP002859	0628	6.8	20%	1kHz, 0.5V	0.052	-	1.5
MP002860	0745	3.3			0.02	-	2.5
MP002861	1045	22			0.059	-	2.1
MP002862	1255	68			0.083	1.3	2.2
MP002863		100			0.117	1.1	1.8
MP002864	1275	10			0.016	5.5	4.4
MP002865		47			0.053	2.7	3

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.