

PCV36-75W Series

36W-75W Constant Voltage Power Supplies



Features


- Captive terminal screws for ease
- Screw lock cable strain relief
- Over load, short circuit and thermal protection
- SELV equivalent
- Class II product
- Safe no load operation
- Suitable for indoor lighting applications




Specification

INPUT	Inrush	<12.5A/240VAC<5.5A/110V		<12A/240VAC<5A/110VAC	<15A/230V<6.5A/115V	<15A/230V<6.5A/115V	15A/230V<6.5/115V
	Voltage	100V ~ 240VAC					
	Frequency	47 ~ 63 Hz					
	Power Factor	0.95					
OUTPUT	MODEL No.	PCV1236	PCV2436	PCV1250	PCV2450	PCV2475	
	Voltage	12V	24V	12V	24V	24V	
	Current	3A	1.5A	4.2A	2A	3.15A	
	Power	36W	36W	50W	50W	75W	
	R&N	300mV	500mV	300mV	500mV	500mV	
	Efficiency (TYP.)	82%	84%	82%	84%	85%	
PROTECTIONS	Over Voltage	Auto recovery					
	Over Temperature	Thermal					
ELEC. CHAR	Set Up Time	2s max					
ENVIRONMENT	Temperature	Operating: -20~+50°C; Storage: -20~+70°C					
SAFETY	Safety Standard	Designed to meet EN61347-1, EN61347-2-13					
EMC	EMI Standard	Meets Emissions to EN55015, EN61547, EN61000-3-2, EN61000-3-3					
OTHERS	Lifetime	50K hrs full load 25°C					
	Case	8046GX	8046GX	8043DH	8043DH	8043DH	

Dimensions Case 8046GX

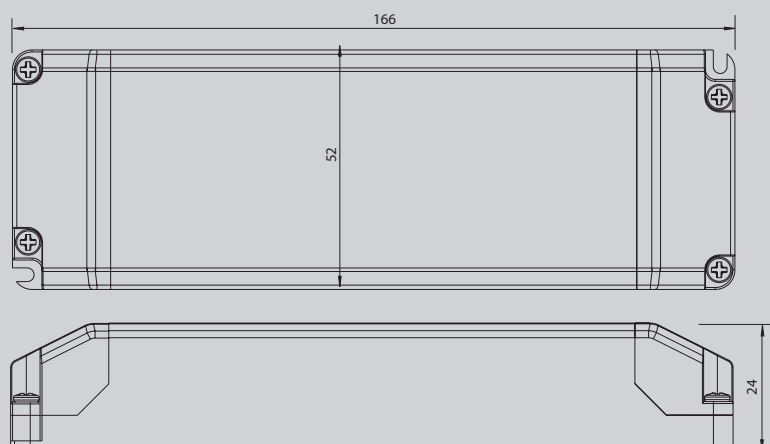

Case: 8046GX Unit: mm



PCV36-75W Series

36W-75W Constant Voltage Power Supplies



Dimensions Case 8043DH

