

EXTERNAL DESKTOP POWER SUPPLY 24VDC 200WATT



POWERPAX: SW4044F

Features:

- Universal Input
- IEC-320-C14 Input Connector
- 3 Year Warranty
- Efficiency Level VI
- Safety approved to: UL,CUL,FCC,GS,CE,RCM



Description:

Our Range of 200 Watt AC/DC switch mode power supplies provide 200 Watts of continuous output power in a high quality compact enclosure suitable for many general power applications.

Specification	
Part Number	SW4044F
Input Voltage Range	100 → 240 Vac
Input Frequency Range	50 → 60Hz
Input Connector	Standard 3 pin IEC C14 input connector
Input Current Rated	2.8A Max.
Inrush Current	100A Max. / 240Vac (Cold start at 25 °C, full load)
Efficiency	88% Min
Input Power(Output: No Load)	<0.5 W (At 230Vac & No load)
Output Voltage Rating	24vdc
Output Current Range	8.3A Max.
Output Min Current	0.05A
Output Connection Type	2.1 x 5.5 x 12 mm Centre Positive – straight
Line and Load Regulation	+/-5%
Over Voltage Protection	V out * 150% Max.
Over Load Protection	I out * 150% Max.
Short Circuit Protection	Automatic recovery after short-circuit fault being removed
Ripple Voltage	240mV
Hi-Pot	3000Vac 10mA
Safety Approved	UL,CUL,GS,PSE,BSMI
EMI Standard	FCC Class B, CE
Operating Temperature Range	0°C → +40 °C
Storage Temperature	-20°C → +80°C
Operating Humidity	20% to 80%
Storage Humidity	10% to 90%
Dimensions	183.2(L) x 81(W) x 42.3(H) mm
Product Weight	860g
Regulator Type	Switched Mode Power Supply

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.


STONTRONICS

TT Electronics IoT Solutions Ltd
Tofts Farm East, Brenda Road, Hartlepool, TS25 2BQ, UK
t: +44 (0) 1429 852 500

EXTERNAL DESKTOP POWER SUPPLY 24VDC 200WATT

POWERPAX: SW4044F

Diagrams

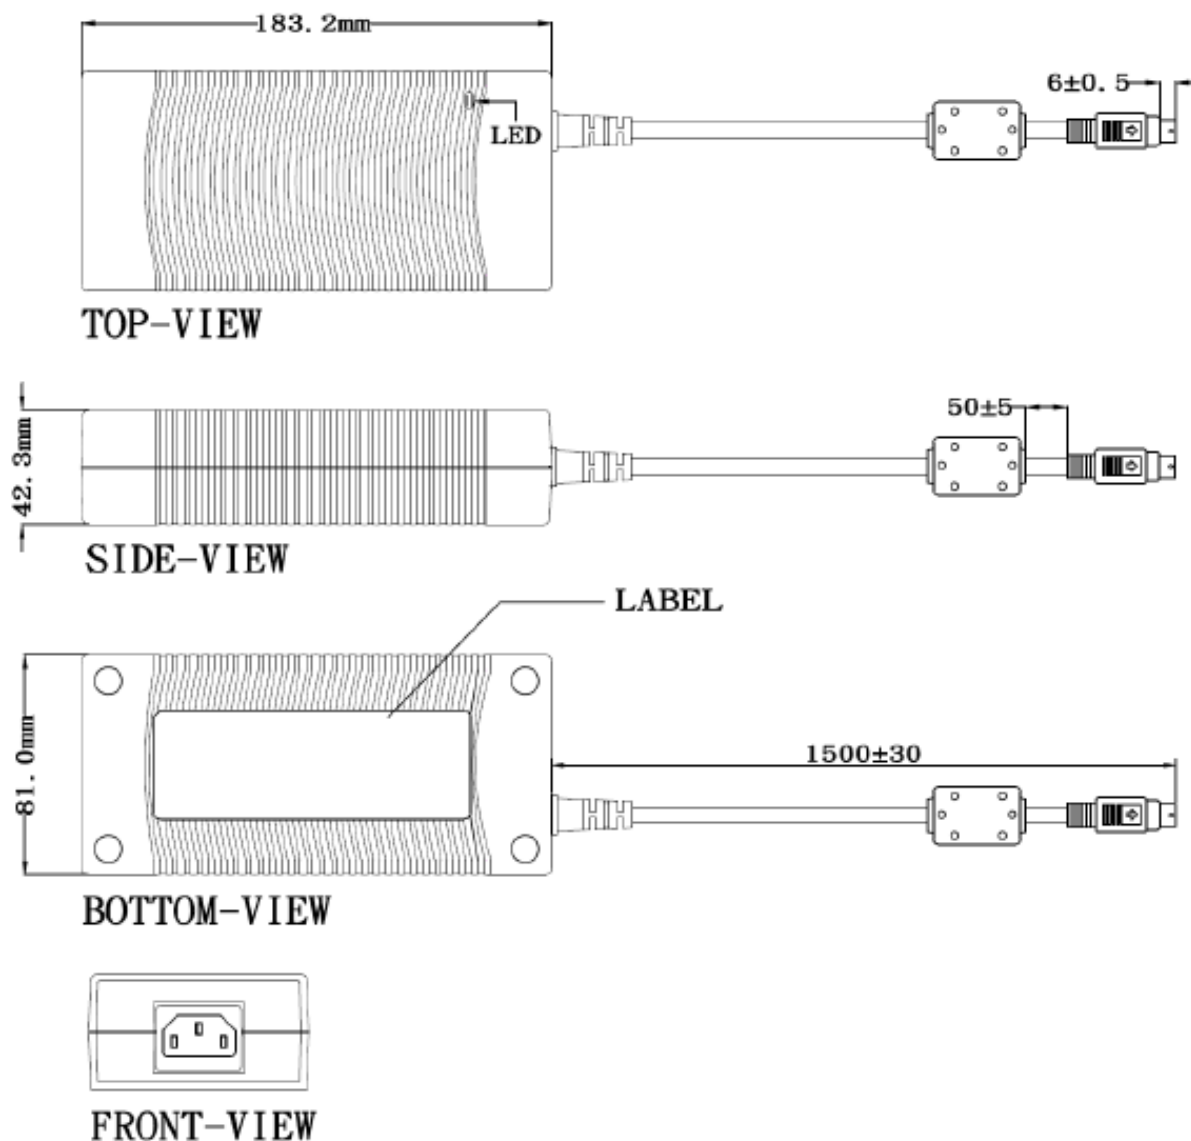

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.