

PCB TERMINAL BLOCKS

5.08mm PCB Mounting Double Decker Terminal Blocks

- Space saving
- Double decker
- 4(2x2) and 6(2x3) pole interlocking
- Open ended modules
- Professional rising clamp terminals
- Guided pin alignment
- Available pre-assembled
- Polarised mouldings
-  approved


CTBDD93HJ



SPECIFICATION	
Rating	20A/320V UL=12A/300V, VDE&IMQ=20A/320V
Dielectric strength	≥2.5kV
Impulse withstand voltage	4kV
Working temperature	110°C
Moulding	UL94-V0 flame retardant PA
Pin/terminal	Copper alloy, Ni & SN

Horizontal 5.08mm

TYPE NO.	POLES	LENGTH
CTBDD93HJ/2	4	12.7mm
CTBDD93HJ/3	6	17.8mm
CTBDD93HJ/4	8	22.9mm
CTBDD93HJ/5	10	27.9mm
CTBDD93HJ/6	12	33mm
CTBDD93HJ/7	14	38.1mm
CTBDD93HJ/8	16	43.2mm
CTBDD93HJ/9	18	48.3mm
CTBDD93HJ/10	20	53.3mm
CTBDD93HJ/11	22	58.4mm
CTBDD93HJ/12	24	63.5mm

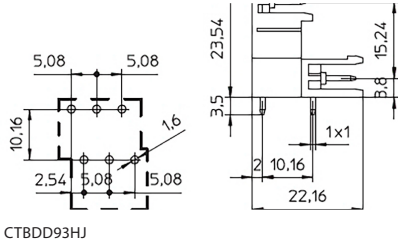

CTBDD93HJ

PCB
TERMINAL
BLOCKS

INTER-
CONNECTION

FUSES &
FUSE-
HOLDERS

LEDs &
INDICATORS

MINIATURE
SWITCHES

LIMIT &
SAFETY
SWITCHES

CONTROL
PRODUCTS

INTERFACE
MODULES &
SUPPORTS

RELAY
BASES

DIN RAIL
ENCLOSURES

BATTERIES

SOLAR
PANELS

TRANS-
FORMERS