

Miniature Relay PT

- 2 pole 12 A, 3 pole 10 A or 4 pole 6 A, 2, 3 or 4 CO contacts
- DC- or AC-coil
- Switching performance up to 3000 VA
- Relay height 29 mm
- Mechanical indicator, optional LED and protection diode
- Manual test tab, optionally lockable.
- White marking tabs



F0191-B

Applications

Universal use in control and automation



Approvals

VDE REG.-Nr. 115719, c **RU** us E214025, **UL** 00/20059(E2)
Technical data of approved types on request

Contact data	PT2	PT3	PT5
Contact configuration	2 CO	3 CO	4 CO
Contact set	single contact		
Type of interruption	micro disconnection		
Rated voltage / max. switching voltage AC	240 / 400 VAC	240 / 400 VAC	240/240 VAC
Rated current	12 A	10 A	6 A
Maximum breaking capacity AC	3000 VA	2500 VA	1500 VA
Limiting making capacity, max 20 ms	24 A	20 A	12 A
Contact material	AgNi90/10, AgNi90/10 gold plated		
Minimum contact load	12V/10mA, 20mV/1mA gold plated		
Rated frequency of operation with / without load	6/600 min ⁻¹		
Operate time	typ 15 ms		
Release time DC coil without / with protection diode	typ 10 / 18 ms		
Bounce time DC coil NO / NC contact	typ 6 / 8 ms		

Contact ratings

Type	Contact	Load	Ambient temp. [°C]	Cycles
IEC 61810				
PT 2 DC/AC-coil	CO	12 A, 250 VAC, cosφ=1	70°C	70x10 ³
PT 2 DC/AC-coil	NO of CO	9 A, 250 VAC, cosφ=1	80°C	150x10 ³
PT 2 DC/AC-coil	NO of CO	4 A, 250 VAC, cosφ=1	80°C	300x10 ³
PT 3 DC/AC-coil	CO	10 A, 250 VAC, cosφ=1	70°C	100x10 ³
PT 5 DC/AC-coil	CO	6 A, 250 VAC, cosφ=1	70°C	100x10 ³
UL 508				
PT 2	CO	12 A, 250 VAC, general purpose	70°C	6.000
PT 2	CO	12 A, 250 VAC, resistive	70°C	100x10 ³
PT 2	NO of CO	12 A, 250 VAC, resistive	70°C	100x10 ³
PT 2	NC of CO	12 A, 250 VAC, resistive	70°C	100x10 ³
PT 3	CO	10 A, 250 VAC, general purpose	70°C	6.000
PT 3	CO	10 A, 250 VAC, resistive	70°C	100x10 ³
PT 3	NO of CO	10 A, 250 VAC, resistive	70°C	100x10 ³
PT 3	NC of CO	10 A, 250 VAC, resistive	70°C	100x10 ³
PT 5	CO	6 A, 250 VAC, general purpose	70°C	6.000
PT 5	CO	6 A, 250 VAC, resistive	70°C	100x10 ³
PT 5	NO of CO	6 A, 250 VAC, resistive	70°C	100x10 ³
PT 5	NC of CO	6 A, 250 VAC, resistive	70°C	100x10 ³
EN60947-4-1				
PT 2	NO of CO	400 VAC, 3,75 A, AC3, opposite polarity	70°C	
PT 2	NO of CO	230 VAC, 1,7A, AC5b (400W lamp load), opposite polarity	70°C	
PT 3	NO of CO	250 VAC, 2 A, AC3, opposite polarity	70°C	
PT 3	NO of CO	230 VAC, 1,7A, AC5b (400W lamp load), opposite polarity	70°C	
PT 5	NO of CO	250 VAC, 3 A, AC3, same polarity	70°C	
PT 5	NO of CO	230 VAC, 1,7A, AC5b (400W lamp load), same polarity	70°C	

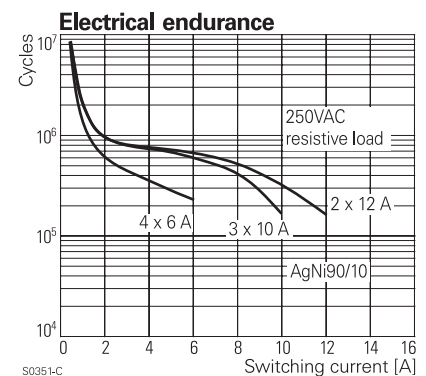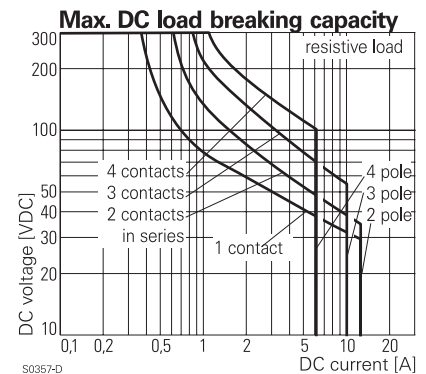

Miniature Relay PT (Continued)

Coil data

Rated coil voltage range DC coil	6...220 VDC
AC coil	6...230 VAC
Operative range to IEC 61810 DC coil, AC-coil 50Hz	2
AC coil 60 Hz at 70°C, % of U_{rtd}	90...110%

Coil versions, DC-coil

Coil code	STD	LED bipolar	LED+ PD*	Rated voltage VDC	Operate voltage VDC	Release voltage VDC	Coil resistance Ohm	Rated coil power mW	opt. LED power mW
006	L06	LA6	6	4.5	0.6	48±10%	750	3.5	
012	L12	LB2	12	9.0	1.2	192±10%	750	10	
024	L24	LC4	24	18.0	2.4	777±10%	741	18	
048	L48	LE8	48	36.0	4.8	3072±10%	750	38	
060	L60	LG0	60	45.0	6.0	4845±12%	743	56	
110	M10	MB0	110	82.5	11.0	16133±15%	750	96.5	
220	N20	NC0	220	165.0	22.0	64533±15%	750	202.5	

All figures are given for coil without preenergization, at ambient temperature +23°C


*) Protection diode PD; standard polarity: +A1 / -A2

Coil versions, AC-coil 50 / 60 Hz


Coil code	STD	LED	Rated voltage VAC	Operate voltage 50 / 60 Hz VAC	Release voltage 50 / 60 Hz VAC	Coil resistance Ohm	Rated coil power 50 / 60 Hz VA
506	R06		6	4.8 / 5.4	1.8	11±10%	1.0 / 0.85
512	R12		12	9.6 / 10.8	3.6	48±10%	1.0 / 0.85
524	R24		24	19.2 / 21.6	7.2	192±10%	1.0 / 0.79
548	R48		48	38.4 / 43.2	14.4	777±10%	1.0 / 0.87
560	R60		60	48.0 / 54.0	18.0	1306±10%	1.0 / 0.87
615	S15		115	92.0 / 103.5	34.5	4845±12%	1.0 / 0.86
730	T30		230	184.0 / 207.0	69.0	19465±15%	1.0 / 0.90

All figures are given for coil without preenergization, at ambient temperature +23°C

Coil operating range DC

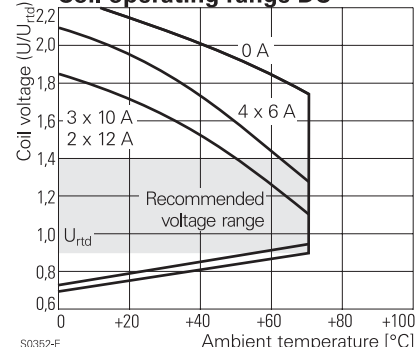

Coil operating range AC

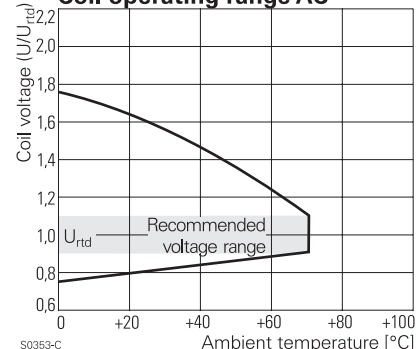

Insulation

	PT2	PT3	PT5
Dielectric strength coil-contact circuit	2500 V _{rms}	2500 V _{rms}	2500 V _{rms}
open contact circuit	1200 V _{rms}	1200 V _{rms}	1200 V _{rms}
adjacent contact circuits	2500 V _{rms}	2500 V _{rms}	2000 V _{rms}
Clearance / creepage coil-contact circuit	≥ 4/4 mm	≥ 4/4 mm	≥ 4/4 mm
adjacent cont. circuits	≥ 3.5/9.5 mm	≥ 2.6/3.5 mm	≥ 1.8/3.5 mm

Material group of insulation parts

Insulation to IEC 61810-1

	basic	basic	basic
Type of insulation coil-contact circuit	basic	basic	basic
open contact circuit	micro disc.	micro disc.	micro disc.
adjacent contact circuits	basic	basic	functional
Rated insulation voltage	250 V	250 V	250 V
Pollution degree	2	2	2
Rated voltage system	230 / 400 V	240 V	240 V
Overvoltage category	III	III	III

Other data

Mechanical endurance DC coil	30x10 ⁶ cycles
AC coil	20x10 ⁶ cycles
Material	RoHS - Directive 2002/95/EC
Environment	
Ambient temperature range	-40...+70°C
Vibration resistance (function) NO / NC contact	7/4 g
Shock resistance (function) NO / NC contact	20/5 g
Category of protection	RTII - flux proof
Processing	
Mounting distance	≥ 0 mm, dense packing
Resistance to soldering heat	270°C / 10s
Relay weight	30 g
Packaging unit	10/250 pcs

Miniature Relay PT (Continued)

Accessories

For details see datasheet

Accessories Miniature Relay PT

NOTE: indicated contact ratings and electrical endurance data for direct wiring of relays (according IEC 61810-1, table 12); for relays mounted on sockets deratings may apply.

Relay Packages

Complete packages consisting of a relay mounted on a socket see Package PT



PCB layout / terminal assignment

Bottom view on pins


Circuit

LED

protection diode+LED




4-pole




S0354-AD

3-pole




S0354-AB

2-pole




S0354-AC




S0354-AF

Dimensions

Solder- and plug-in terminals (standard version)

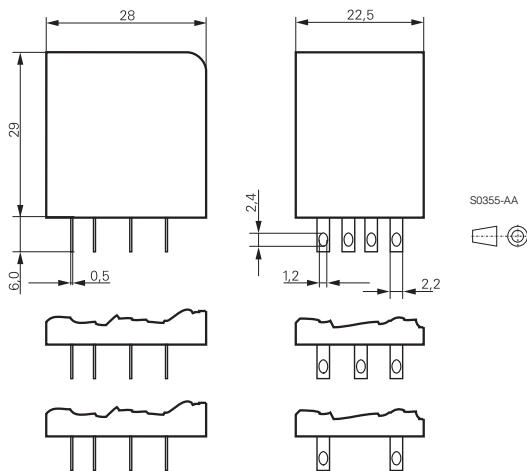

PCB version

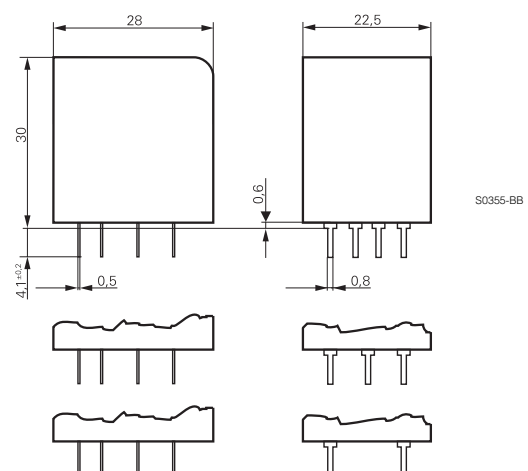

Product key

Typical product key

PT

5

7

0

730

Type

PT Miniature Relay PT

Contact configuration

- 2** 2 CO contacts (2 form C)
- 3** 3 CO contacts (3 form C)
- 5** 4 CO contacts (4 form C)

Contact material

- 7** AgNi 90/10, with test button*)
- 8** AgNi 90/10 gold plated, with test button*)

Version

- 0** standard, 2.8 mm quick connect term.
- 1** PCB terminals

Coil

Coil code: please refer to coil versions table, preferred types in bold print

*) Version with closed cap without test button available on request
Other types on request

Miniature Relay PT (Continued)

Product key	Cont. Config.	Cont. material	Version	Coil	Coil	Part number
PT270024	2 CO contacts	AgNi 90/10 test button	AMP 2.8 connectors	DC-coil	24 VDC	4-1419111-2
PT270524				AC-coil	24 VAC	4-1419111-8
PT270615					115 VAC	5-1419111-0
PT270730					230 VAC	5-1419111-1
PT270L24				DC-coil+LED	24 VDC	9-1415001-1
PT270R24				AC-coil+LED	24 VAC	1415002-1
PT270S15					115 VAC	2-1415039-1
PT270T30					230 VAC	3-1415002-1
PT271024			PCB terminals	DC-coil	24 VDC	5-1419111-3
PT271524				AC-coil	24 VAC	5-1419111-6
PT271615					115 VAC	4-1419135-0
PT271730					230 VAC	5-1419111-8
PT370024	3 CO contacts	AgNi 90/10 test button	AMP 2.8 connectors	DC-coil	24 VDC	6-1419111-1
PT370524				AC-coil	24 VAC	6-1419111-6
PT370615					115 VAC	6-1419111-8
PT370730					230 VAC	6-1419111-9
PT370L24				DC-coil+LED	24 VDC	5-1415002-1
PT370R24				AC-coil+LED	24 VAC	7-1415002-1
PT370S15					115 VAC	9-1415039-1
PT370T30					230 VAC	9-1415002-1
PT371024			PCB terminals	DC-coil	24 VDC	7-1419111-1
PT371524				AC-coil	24 VAC	7-1419111-3
PT371615					115 VAC	1393154-8
PT371730					230 VAC	7-1419111-5
PT570024	4 CO contacts	AgNi 90/10 test button	AMP 2.8 connectors	DC-coil	24 VDC	1-1393154-2
PT570524				AC-coil	24 VAC	8-1419111-7
PT570615					115 VAC	9-1419111-0
PT570730					230 VAC	9-1419111-1
PT570L24				DC-coil+LED	24 VDC	6-1415001-1
PT570LC4				DC-coil+LED+PD		7-1415541-0
PT570R24				AC-coil+LED	24 VAC	7-1415001-1
PT570S15					115 VAC	7-1415003-1
PT570T30					230 VAC	8-1415001-1
PT571024			PCB terminals	DC-coil	24 VDC	9-1419111-3
PT571524				AC-coil	24 VAC	9-1419111-6
PT571615					115 VAC	1-1393154-5
PT571730					230 VAC	9-1419111-8
PT580024		AgNi 90/10 gold plated test button	AMP 2.8 connectors	DC-coil	24 VDC	1-1393154-7
PT580524				AC-coil	24 VAC	2-1393154-1
PT580730					230 VAC	2-1393154-2
PT580L24				DC-coil+LED	24 VDC	5-1415026-1
PT580R24				AC-coil+LED	24 VAC	6-1415026-1
PT580T30					230 VAC	7-1415026-1
PT581024			PCB terminals	DC-coil	24 VDC	7-1419135-2
PT581730				AC-coil	230 VAC	2-1393154-3