



PTC Thermistor

Level sensor

D1010-B0135-A040

Ordering code: B59010D1135B040

Data sheet


Form: FBLE3K/b

File name: D1010_B0135_A040d

MODIFICATIONS: General tolerances have been added

REMARKS:

Prepared by	Aldrian	Release	signed: PE / Aldrian		signed: QS / Zödl		
			signed:		signed:		
ISSUE DATE	21.07.06	ISSUE	d	PUBLISHER	KB KH PE-PTC	PAGE	0/1

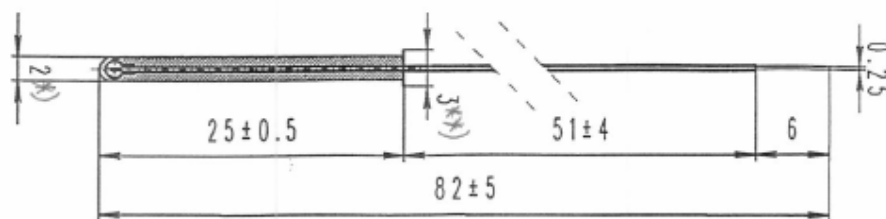

*) General tolerance $\pm 0,1$ mm

**) General tolerance $\pm 0,2$ mm

Max. operating voltage	$V_{\max}$	24	V
Resistance at 25°C	R_{25}	100-200	Ω
Residual current in oil (V=12V; TA=50°C)	$I_{\text{res, oil}}$	≥ 45	mA
Residual current in air (V=14V; TA=-25°C)	$I_{\text{res, air}}$	≤ 33.5	mA
Switching time	t_s	2	s
Stabilizing time	t_{stab}	40	s
Surface temperature (V=24V)	T_{Surf}	< 200	°C
Number of cycles (R=100 Ω ; V=Vmax)	N	max. 5000	
Operating temperature range (V= 0)	$T_{\text{op}(0)}$	-55/+100	°C
Operating temperature range (V= $V_{\max}$)	$T_{\text{op}(V_{\max})}$	-25/+50	°C

© EPCOS AG 2006. Reproduction, publication and dissemination of this data sheet, enclosures hereto and the information contained therein without EPCOS' prior express consent is prohibited.

Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

ISSUE DATE	21.07.06	ISSUE	d	PUBLISHER	KB KH PE-PTC	PAGE	1/1
------------	----------	-------	---	-----------	--------------	------	-----