


Eveready Super Heavy Duty (R20)

D



Industry Standard Dimensions

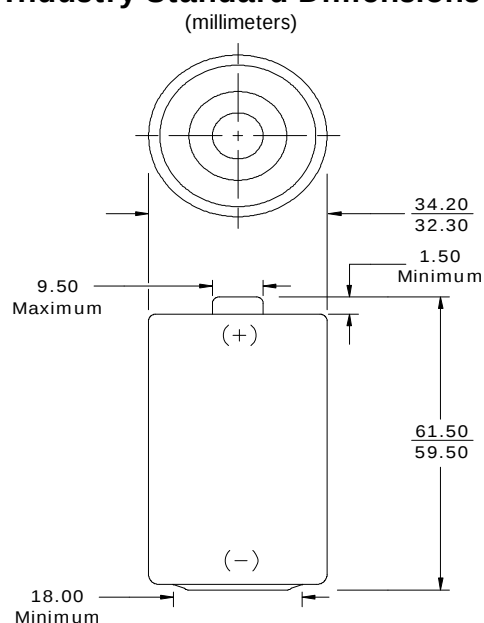


Specifications

Classification:	"Carbon Zinc" (Zinc Chloride)
Chemical System:	Zinc-Manganese Dioxide (Zn/MnO ₂) No Added Mercury or Cadmium
Designation:	IEC-R20
Nominal Voltage:	1.5 volts
Operating Temp:	-18°C to 55°C
Typical Weight:	89 grams
Typical Volume:	53 cubic centimeters
Jacket:	Metal


Storage / Capacity Characteristics

Effects of Storage at Various Temperatures

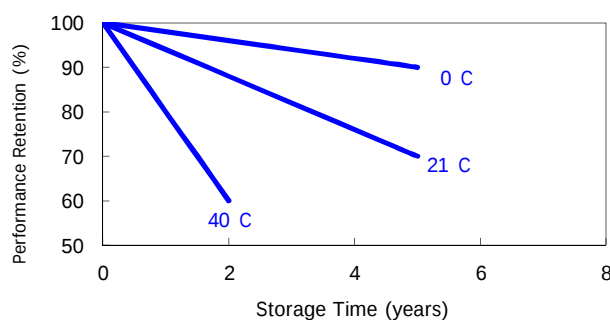


Industry Standard Tests (21°C)

RADIO
10 ohm 4 hrs/day

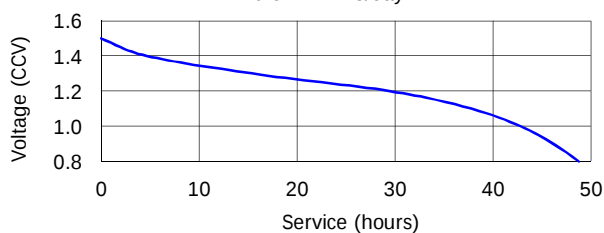


TAPE PLAYER
3.9 ohm 1 hr/day

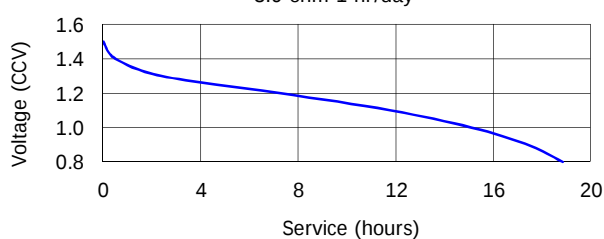


TOY
2.2 ohm 1 hr/day

LIGHTING
2.2 ohm LIF

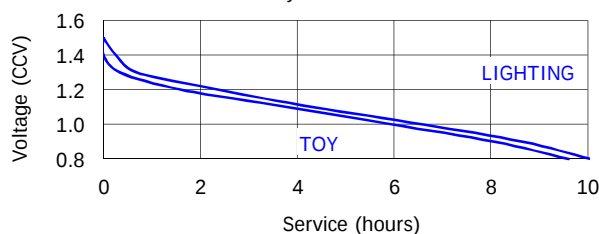

LIGHTING
1.5 ohm HIF

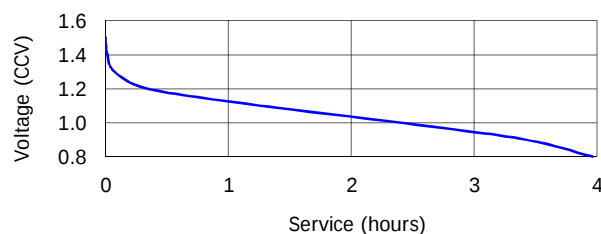

Important Notice

This datasheet contains information specific to battery chargers manufactured at the time of its publication.

©Energizer Holdings, Inc. - Contents herein do not constitute a warranty.