



circuit breaker 3VA2 IEC Frame 160 breaking capacity class M  $I_{cu}=55 \text{ kA @ } 415 \text{ V}$   
 3-pole, line protection ETU860, LSIG,  $I_n=25 \text{ A}$  overload protection  $I_r=10 \text{ A} \dots 25 \text{ A}$   
 short-circuit protection  $I_{sd}=0.6 \dots 10 \times I_n$ ,  $I_i=1.5 \dots 12 \times I_n$  neutral conductor protection  
 optionally with external current transformer, up to 160% ground-fault protection,  
 can be switched off  $I_g=0.2 \dots 1 \times I_n$ ,  $t_g=0.05-0.8 \text{ s}$  nut keeper kit

| Model   |   |
|---|---|
| product brand name  | SENTRON                                 |
| product designation   | Molded case circuit breaker             |
| design of the product   | Line protection                         |
| design of the overcurrent release   | ETU860                                  |
| protection function of the overcurrent release  | LSIG                                    |
| number of poles   | 3                                       |
| General technical data  |   |
| insulation voltage / rated value  | 800 V                                   |
| operating voltage / at AC / rated value   | 690 V                                   |
| power loss [W] / maximum  | 0.6 W                                   |
| power loss [W] / for rated value of the current / at AC / in hot operating state / per pole           | 0.2 W                                   |
| mechanical service life (operating cycles) / typical  | 25 000                                  |
| electrical endurance (operating cycles) / at AC-1 / at 380/415 V                                      | 14 000                                  |
| electrical endurance (operating cycles) / at AC-1 / at 690 V  | 9 800                                   |
| product feature / for neutral conductors / upgradable/retrofitable / short-circuit and overload proof | Yes                                     |
| ground-fault monitoring version   | Summation current formation L-conductor |
| product function  |   |
| • communication function  | Yes                                     |
| • other measurement function  | Yes                                     |
| Net Weight  | 2.5 kg                                  |
| Current   |   |
| operational current   |   |
| • at 40 °C  | 25 A                                    |
| • at 45 °C  | 25 A                                    |
| • at 50 °C  | 25 A                                    |
| • at 55 °C  | 25 A                                    |
| • at 60 °C  | 25 A                                    |
| • at 65 °C  | 25 A                                    |
| • at 70 °C  | 25 A                                    |
| Switching capacity according to IEC 60947   |   |
| switching capacity class of the circuit breaker   | M                                       |
| maximum short-circuit current breaking capacity ( $I_{cu}$ )  |   |
| • at 240 V  | 85 kA                                   |

|  |   |
|--|---|
| <ul style="list-style-type: none"> <li>• at 415 V</li> <li>• at 440 V</li> <li>• at 500 V</li> <li>• at 690 V</li> </ul>                     | 55 kA<br>55 kA<br>36 kA<br>3 kA                 |
| operating short-circuit current breaking capacity (Ics)  |   |
| <ul style="list-style-type: none"> <li>• at 240 V</li> <li>• at 415 V</li> <li>• at 440 V</li> <li>• at 500 V</li> <li>• at 690 V</li> </ul> | 85 kA<br>55 kA<br>55 kA<br>36 kA<br>2.5 kA      |
| short-circuit current making capacity (Icm)  |   |
| <ul style="list-style-type: none"> <li>• at 240 V</li> <li>• at 415 V</li> <li>• at 440 V</li> <li>• at 500 V</li> <li>• at 690 V</li> </ul> | 187 kA<br>121 kA<br>121 kA<br>75.5 kA<br>3.7 kA |

#### Adjustable parameters

|  |                 |
|--|-----------------|
| product feature / for L-tripping / can be switched on/off  | No              |
| adjustable response value setting current (I <sub>r</sub> ) / of the L-trip / with I <sub>2t</sub> characteristic  |                 |
| <ul style="list-style-type: none"> <li>• minimum</li> <li>• maximum</li> </ul>                                     | 10 A<br>25 A    |
| adjustable response value delay time (t <sub>r</sub> ) / for L-tripping / with I <sub>2t</sub> characteristic      |                 |
| <ul style="list-style-type: none"> <li>• minimum</li> <li>• maximum</li> </ul>                                     | 0.5 s<br>25 s   |
| adjustable response value setting current (I <sub>sd</sub> ) / of S-trip / with I <sub>0t</sub> characteristic     |                 |
| <ul style="list-style-type: none"> <li>• minimum</li> <li>• maximum</li> </ul>                                     | 15 A<br>250 A   |
| adjustable response value setting current (I <sub>sd</sub> ) / of S-trip / with I <sub>2t</sub> characteristic     |                 |
| <ul style="list-style-type: none"> <li>• minimum</li> <li>• maximum</li> </ul>                                     | 15 A<br>250 A   |
| adjustable response value delay time (t <sub>sd</sub> ) / for S-tripping / with I <sub>0t</sub> characteristic     |                 |
| <ul style="list-style-type: none"> <li>• minimum</li> <li>• maximum</li> </ul>                                     | 0.05 s<br>0.5 s |
| adjustable response value delay time (t <sub>sd</sub> ) / for S-tripping / with I <sub>2t</sub> characteristic     |                 |
| <ul style="list-style-type: none"> <li>• minimum</li> <li>• maximum</li> </ul>                                     | 0.05 s<br>0.5 s |
| adjustable response value setting current (I <sub>i</sub> ) / for I-tripping                                       |                 |
| <ul style="list-style-type: none"> <li>• minimum</li> <li>• maximum</li> </ul>                                     | 37 A<br>300 A   |
| adjustable current response value current / for G-tripping / with standard characteristic                          |                 |
| <ul style="list-style-type: none"> <li>• initial value</li> <li>• full-scale value</li> </ul>                      | 15 A<br>25 A    |
| adjustable response value delay time (t <sub>g</sub> ) / for G-tripping / with I <sub>0t</sub> characteristic      |                 |
| <ul style="list-style-type: none"> <li>• minimum</li> <li>• maximum</li> </ul>                                     | 0.05 s<br>0.8 s |
| adjustable response value setting current (I <sub>g</sub> ) / for G-tripping / with I <sub>2t</sub> characteristic |                 |
| <ul style="list-style-type: none"> <li>• minimum</li> <li>• maximum</li> </ul>                                     | 15 A<br>25 A    |
| adjustable response value delay time (t <sub>g</sub> ) / for G-tripping / with I <sub>2t</sub> characteristic      |                 |
| <ul style="list-style-type: none"> <li>• minimum</li> <li>• maximum</li> </ul>                                     | 0.05 s<br>0.8 s |
| adjustable setting current (I <sub>n</sub> ) / for N-tripping  |                 |

|   |                             |
|---|-----------------------------|
| • minimum                               | 10 A                        |
| • maximum                               | 40 A                        |
| design of the N-conductor protection    | adjustable OFF; 40% to 160% |
| product function / grounding protection | Yes                         |

### Mechanical Design

|                        |         |
|------------------------|---------|
| product component      |         |
| • undervoltage release | No      |
| • voltage trigger      | No      |
| • trip indicator       | No      |
| height [in]            | 7.13 in |
| height                 | 181 mm  |
| width [in]             | 4.13 in |
| width                  | 105 mm  |
| depth [in]             | 3.39 in |
| depth                  | 86 mm   |

### Connections

|   |                              |
|---|------------------------------|
| arrangement of electrical connectors / for main current circuit                           | Front terminal               |
| type of electrical connection / for main current circuit                                  | on both sides nut keeper kit |
| type of connectable conductor cross-sections / for flat-bar terminal connection / minimum | 13 x 1 mm                    |
| type of connectable conductor cross-sections / for flat-bar terminal connection / maximum | 25 x 8 mm                    |
| design of the surface / of the connections / on the top of the switch (N, 1, 3, 5)        | tin                          |
| design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6)     | tin                          |

### Auxiliary circuit

|  |   |
|--|---|
| number of CO contacts / for auxiliary contacts | 0 |
|--|---|

### Accessories

|  |     |
|--|-----|
| product extension / optional / motor drive | Yes |
|--|-----|

### Environmental conditions

|                                    |        |
|------------------------------------|--------|
| protection class IP / on the front | IP40   |
| ambient temperature                |        |
| • during operation / minimum       | -25 °C |
| • during operation / maximum       | 70 °C  |
| • during storage / minimum         | -40 °C |
| • during storage / maximum         | 80 °C  |

### Environmental footprint

|  |                 |
|--|-----------------|
| global warming potential [CO2 eq] / total                | 61.814 kg       |
| global warming potential [CO2 eq] / during manufacturing | 14.6 kg         |
| global warming potential [CO2 eq] / during operation     | 48.9 kg         |
| global warming potential [CO2 eq] / after end of life    | -2.2 kg         |
| Siemens Eco Profile (SEP)                                | Siemens EcoTech |
| reference code / according to IEC 81346-2                | Q               |

### Approvals / Certificates

#### General Product Approval



[Miscellaneous](#)



[Confirmation](#)

#### General Product Approval      EMV      Test Certificates



[Miscellaneous](#)

[Special Test Certificate](#)

[Type Test Certificates/Test Report](#)

### Maritime application



[CCS \(China Classification Society\)](#)

other Dangerous goods Environment

[Miscellaneous](#)

[Miscellaneous](#)

[Confirmation](#)



[Transport Information](#)

[Environmental Confirmations](#)

Environment



[Environmental Confirmations](#)



Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA2125-5KQ32-0AA0>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3VA2125-5KQ32-0AA0>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

[https://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3VA2125-5KQ32-0AA0](https://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA2125-5KQ32-0AA0)

CAX-Online-Generator



<https://www.siemens.com/cax>

Tender specifications

<https://www.siemens.com/specifications>

Characteristic curves

[https://curves.simaris.siemens.com/curves/<mmp\\_prod\\_noCOMP="HAUPT"></mmp\\_prod\\_no>](https://curves.simaris.siemens.com/curves/<mmp_prod_noCOMP=)

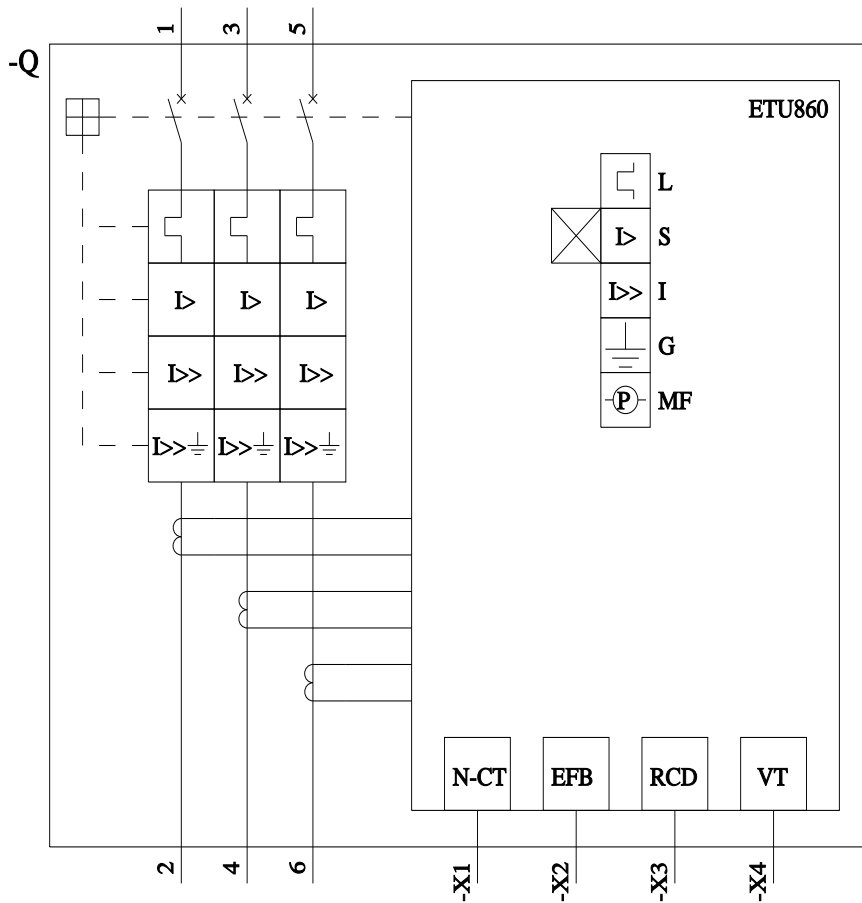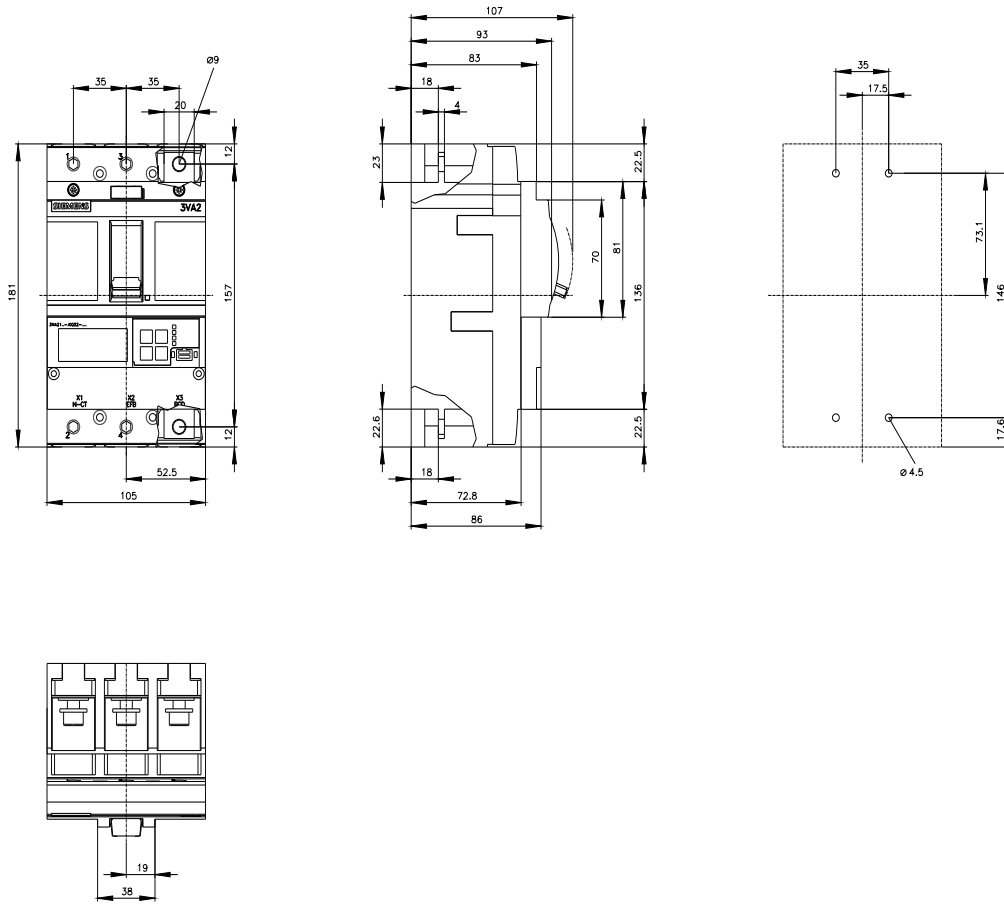

last modified:

4/23/2026



