



circuit breaker 3VA2 IEC Frame 160 breaking capacity class M Icu=55 kA @ 415 V 3-pole, motor protection ETU860M, LSIG, In=40 A overload protection Ir=16 A...40 A short-circuit protection I_{sd}=1.2..15x I_n, I_i=3..15x I_n ground-fault protection, can be switched off I_g=0.4... 1 x I_n, t_g=0.05-0.8s nut keeper kit

Model	
product brand name	SENTRON
product designation	Molded case circuit breaker
design of the product	Motor protection
design of the overcurrent release	ETU860M
protection function of the overcurrent release	LSIG
number of poles	3
General technical data	
insulation voltage / rated value	800 V
operating voltage / at AC / rated value	690 V
operating power / at AC-3 / at 400 V	18 500 W
operating power / at AC-3 / at 230 V	11 000 W
power loss [W] / maximum	1.6 W
power loss [W] / for rated value of the current / at AC / in hot operating state / per pole	0.53 W
mechanical service life (operating cycles) / typical	25 000
electrical endurance (operating cycles) / at AC-1 / at 380/415 V	14 000
electrical endurance (operating cycles) / at AC-1 / at 690 V	9 800
electrical endurance (operating cycles) / at AC-3 / at 380/415 V	10 000
product feature / for neutral conductors / upgradable/retrofitable / short-circuit and overload proof	No
ground-fault monitoring version	Summation current formation L-conductor
product function	
• communication function	Yes
• phase failure detection	Yes
• other measurement function	Yes
Net Weight	2.5 kg
Current	
operational current	
• at 40 °C	40 A
• at 45 °C	40 A
• at 50 °C	40 A
• at 55 °C	40 A
• at 60 °C	40 A
• at 65 °C	40 A
• at 70 °C	40 A
Switching capacity according to IEC 60947	
switching capacity class of the circuit breaker	E
maximum short-circuit current breaking capacity (I _{cu})	
• at 240 V	85 kA
• at 415 V	55 kA
• at 440 V	55 kA
• at 500 V	36 kA
• at 690 V	3 kA
operating short-circuit current breaking capacity (I _{cs})	
• at 240 V	85 kA
• at 415 V	55 kA
• at 440 V	55 kA













<ul style="list-style-type: none"> • at 500 V • at 690 V 	<p>36 kA</p> <p>2.5 kA</p>
<p>short-circuit current making capacity (I_{cm})</p> <ul style="list-style-type: none"> • at 240 V • at 415 V • at 440 V • at 500 V • at 690 V 	<p>187 kA</p> <p>121 kA</p> <p>121 kA</p> <p>75.5 kA</p> <p>3.7 kA</p>

Adjustable parameters

product feature / for L-tripping / can be switched on/off	No
adjustable response value setting current (I _r) / of the L-trip / with I _{2t} characteristic	
<ul style="list-style-type: none"> • minimum • maximum 	<p>16 A</p> <p>40 A</p>
adjustable response value delay time (t _r) / for L-tripping / with I _{2t} characteristic	
<ul style="list-style-type: none"> • minimum • maximum 	<p>3 s</p> <p>30 s</p>
adjustable response value setting current (I _{sd}) / of S-trip / with I _{0t} characteristic	
<ul style="list-style-type: none"> • minimum • maximum 	<p>48 A</p> <p>600 A</p>
adjustable response value delay time (t _{sd}) / for S-tripping / with I _{0t} characteristic	
<ul style="list-style-type: none"> • minimum • maximum 	<p>0.03 s</p> <p>0.03 s</p>
adjustable response value setting current (I _i) / for I-tripping	
<ul style="list-style-type: none"> • minimum • maximum 	<p>120 A</p> <p>600 A</p>
adjustable current response value current / for G-tripping / with standard characteristic	
<ul style="list-style-type: none"> • initial value • full-scale value 	<p>8 A</p> <p>40 A</p>
adjustable response value delay time (t _g) / for G-tripping / with I _{0t} characteristic	
<ul style="list-style-type: none"> • minimum • maximum 	<p>0.05 s</p> <p>0.8 s</p>
adjustable response value setting current (I _g) / for G-tripping / with I _{2t} characteristic	
<ul style="list-style-type: none"> • minimum • maximum 	<p>8 A</p> <p>40 A</p>
adjustable response value delay time (t _g) / for G-tripping / with I _{2t} characteristic	
<ul style="list-style-type: none"> • minimum • maximum 	<p>0.05 s</p> <p>0.8 s</p>
adjustable setting current (I _{nN}) / for N-tripping	
<ul style="list-style-type: none"> • minimum • maximum 	<p>0 A</p> <p>0 A</p>
product function / grounding protection	Yes
adjustable trip class (T _c CLASS)	10A, 10/10E, 20/ 20E, 30/30E
tripping time (T _p) / with adjustable trip class (T _c CLASS)	
<ul style="list-style-type: none"> • minimum • maximum 	<p>3 s</p> <p>30 s</p>

Mechanical Design

product component	
<ul style="list-style-type: none"> • undervoltage release • voltage trigger • trip indicator 	<p>No</p> <p>No</p> <p>No</p>
height [in]	7.13 in
height	181 mm
width [in]	4.13 in

width	105 mm				
depth [in]	3.39 in				
depth	86 mm				
Connections					
arrangement of electrical connectors / for main current circuit	Front terminal				
type of electrical connection / for main current circuit	on both sides nut keeper kit				
type of connectable conductor cross-sections / for flat-bar terminal connection / minimum	13 x 1 mm				
type of connectable conductor cross-sections / for flat-bar terminal connection / maximum	25 x 8 mm				
design of the surface / of the connections / on the top of the switch (N, 1, 3, 5)	tin				
design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6)	tin				
Auxiliary circuit					
number of CO contacts / for auxiliary contacts	0				
Accessories					
product extension / optional / motor drive	Yes				
Environmental conditions					
protection class IP / on the front	IP40				
ambient temperature					
• during operation / minimum	-25 °C				
• during operation / maximum	70 °C				
• during storage / minimum	-40 °C				
• during storage / maximum	80 °C				
Environmental footprint					
global warming potential [CO2 eq] / total	61.814 kg				
global warming potential [CO2 eq] / during manufacturing	14.6 kg				
global warming potential [CO2 eq] / during operation	48.9 kg				
global warming potential [CO2 eq] / after end of life	-2.2 kg				
Siemens Eco Profile (SEP)	Siemens EcoTech				
reference code / according to IEC 81346-2	Q				
Approvals / Certificates					
General Product Approval					
		Miscellaneous			Confirmation
General Product Approval		EMV	Test Certificates		
			Miscellaneous	Special Test Certificate	Type Test Certificates/Test Report
Maritime application		other			
		CCS (China Classification Society)	Miscellaneous	Miscellaneous	Confirmation
other	Dangerous goods	Environment			
	Transport Information	Environmental Conformations		Environmental Conformations	

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA2140-5MQ32-0AA0>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3VA2140-5MQ32-0AA0>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

https://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA2140-5MQ32-0AA0

CAX-Online-Generator


<https://www.siemens.com/cax>

Tender specifications

<https://www.siemens.com/specifications>

Characteristic curves

https://curves.simaris.siemens.com/curves/<mmp_prod_noCOMP='HAUPT'></mmp_prod_no>

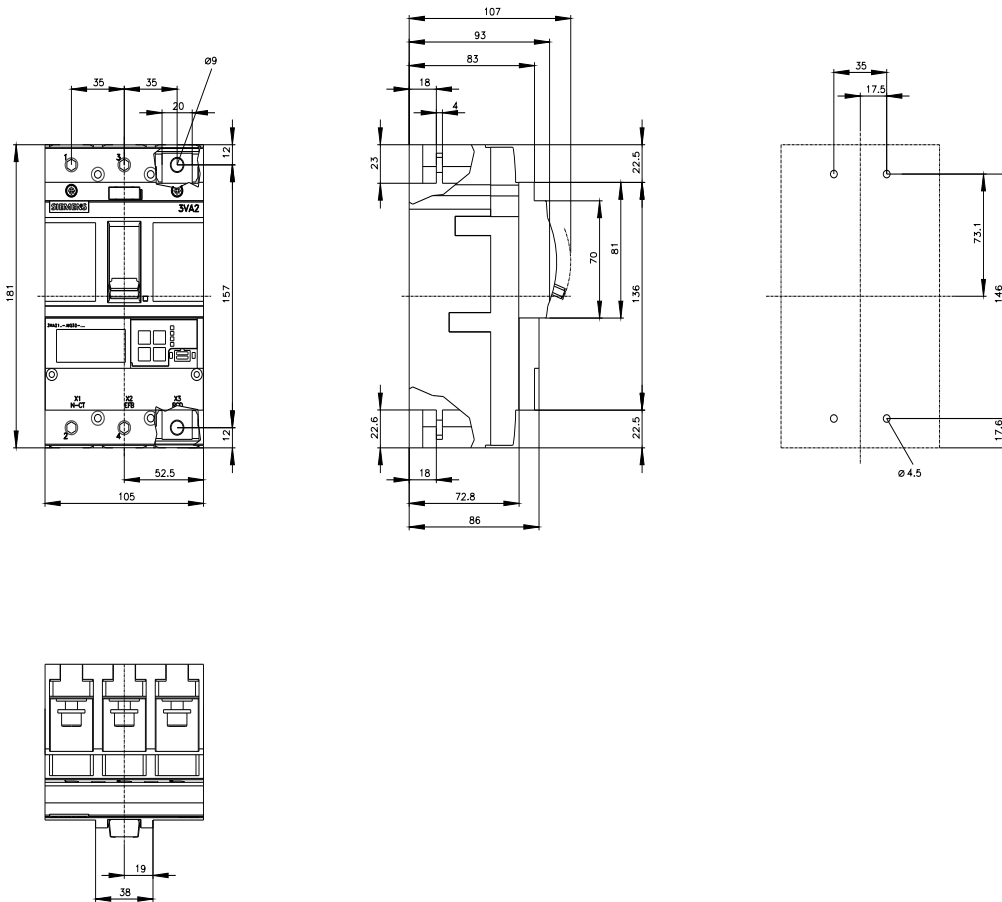

last modified:

4/23/2026 

