


GS1AF1

Blown fuse signalling contact, TeSys GS, 1st C/O, for GS1 GS2 3/4 poles 50 A, NFC fuse 14 x 51 mm

Product availability : Non-Stock - Not normally stocked in distribution facility

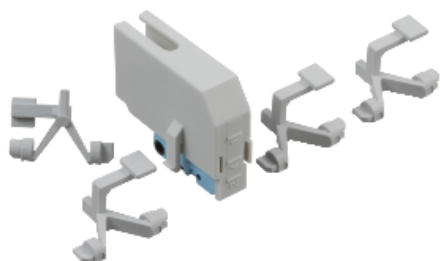

Main

Range of product	TeSys
Device short name	GS1AF
Product or component type	Auxiliary contact
Contact application	Blown fuse signalling
Contacts type and composition	1 C/O
Contact operation	Instantaneous
[I _{th}] conventional free air thermal current	16 A 104 °F (40 °C)
[I _e] rated operational current	12 A 24 V DC-13 2 A 48 V DC-13 3 A 400 V AC-15 4 A 230 V AC-15 0.4 A 220 V DC-13 0.6 A 110 V DC-13

Complementary

Range compatibility	TeSys GS fuse-switch disconnectors
Mechanical durability	30000 cycles
Electrical durability	30000 cycles AC-15
Product compatibility	GS
Poles description	4P 3P
Switch rated current	50 A
Fuse type	NFC DIN
Fuse size	14 x 51 mm
Net weight	0.06 lb(US) (0.025 kg)

Ordering and shipping details

Category	18402 - WORLD SERVICE PARTS(CONTROL ACCESS)
Discount Schedule	CP10

GTIN	03389110563290
Returnability	No
Country of origin	FR

Offer Sustainability

REACH free of SVHC	Yes
EU RoHS Directive	Compliant EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS declaration
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.

Contractual warranty

Warranty	18 months
----------	-----------