


GS1AF23

Blown fuse signalling contact, TeSys GS, 1st C/O, for GS1 GS2 3 poles 100/125 A, NFC fuse 22 x 58 mm

GS1AF23 has not been replaced. Please contact your customer care center for more information.

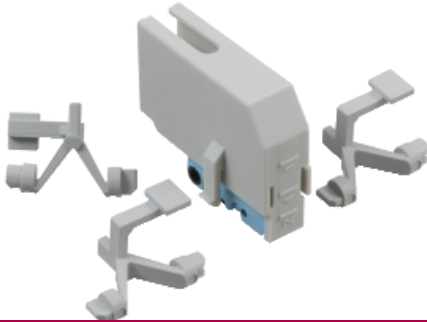

⚠ Discontinued

Main

Range of product	TeSys
Device short name	GS1AF
Product or component type	Auxiliary contact
Contact application	Blown fuse signalling
Contacts type and composition	1 C/O
Contact operation	Instantaneous
[I _{th}] conventional free air thermal current	16 A 104 °F (40 °C)
[I _e] rated operational current	12 A 24 V DC-13 2 A 48 V DC-13 3 A 400 V AC-15 4 A 230 V AC-15 0.4 A 220 V DC-13 0.6 A 110 V DC-13

Complementary

Range compatibility	TeSys GS fuse-switch disconnecter
Mechanical durability	30000 cycles
Electrical durability	30000 cycles AC-15
Product compatibility	GS
Poles description	3P
Switch rated current	100 A 125 A
Fuse type	NFC DIN
Fuse size	22 x 58 mm
Net weight	0.07 lb(US) (0.033 kg)

Ordering and shipping details

Category	18402-WORLD SERVICE PARTS(CONTROL ACCESS)
Discount Schedule	CP10
GTIN	03389110563306

Returnability	No
---------------	----

Offer Sustainability

REACH free of SVHC	Yes
EU RoHS Directive	Compliant EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS declaration

Contractual warranty

Warranty	18 months
----------	-----------
