









accessories for 3KD size 1/2, 3KF size 1, 3KC0 size 1/2, auxiliary switch 1 changeover contact, solid-state compatible with connecting cable 500 mm



| Model   |   |   |   |   |   |
|---|---|---|---|---|---|
| product brand name  | SETRON  |   |   |   |   |
| product designation   | Accessories for switch disconnectors  |   |   |   |   |
| design of the product   | Auxiliary switch  |   |   |   |   |
| Auxiliary circuit   |   |   |   |   |   |
| number of CO contacts of auxiliary contacts instantaneous contact                   | 1   |   |   |   |   |
| number of NC contacts for auxiliary contacts instantaneous contact                  | 0   |   |   |   |   |
| number of NO contacts for auxiliary contacts instantaneous contact                  | 0   |   |   |   |   |
| operational current of auxiliary contacts   | 0.1 A   |   |   |   |   |
| • at AC-13 at 230 V   |   |   |   |   |   |
| Suitability   |   |   |   |   |   |
| suitability for use   | For 3KD sizes 1 and 2   |   |   |   |   |
| Product details   |   |   |   |   |   |
| product description   | 1 CO contact, solid-state compatible  |   |   |   |   |
| Connections   |   |   |   |   |   |
| type of electrical connection   | with soldered-on cable (finely stranded) 0.75mm <sup>2</sup> (AWG18), 50cm long |   |   |   |   |
| • for auxiliary and control circuit   | Soldering tag connection  |   |   |   |   |
| Mechanical Design   |   |   |   |   |   |
| fastening method  | Can be plugged in and integrated  |   |   |   |   |
| Net Weight  | 111 g   |   |   |   |   |
| Approvals Certificates  |   |   |   |   |   |
| Environment   | General Product Approval  |   |   |   |   |
| <a href="#">Environmental Confirmations</a>   | <a href="#">Environmental Confirmations</a>                                     |  |  |  | <a href="#">Miscellaneous</a>   |
| General Product Approval  | Test Certificates   | Maritime application  |   |   |   |
|  | <a href="#">Confirmation</a>  |  |  | <a href="#">Type Test Certificates/Test Report</a>                                    |  |
| other   |   |   |   |   |   |



**Further information**

**Information on the packaging**

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

**Information for data generation and storage**

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<https://www.siemens.com/lowvoltage/catalogs>

**Industry Mall (Online ordering system)**

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3KD9103-3>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**

<https://support.industry.siemens.com/cs/ww/en/ps/3KD9103-3>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**

[https://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3KD9103-3](https://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3KD9103-3)

**CAX-Online-Generator**


<https://www.siemens.com/cax>


**Tender specifications**

<https://www.siemens.com/specifications>

**Characteristic curves**

[https://curves.simaris.siemens.com/curves/<mmp\\_prod\\_noCOMP="HAUPT"></mmp\\_prod\\_no>](https://curves.simaris.siemens.com/curves/<mmp_prod_noCOMP=)

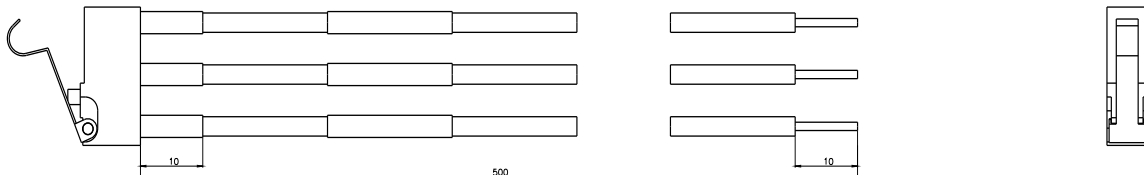

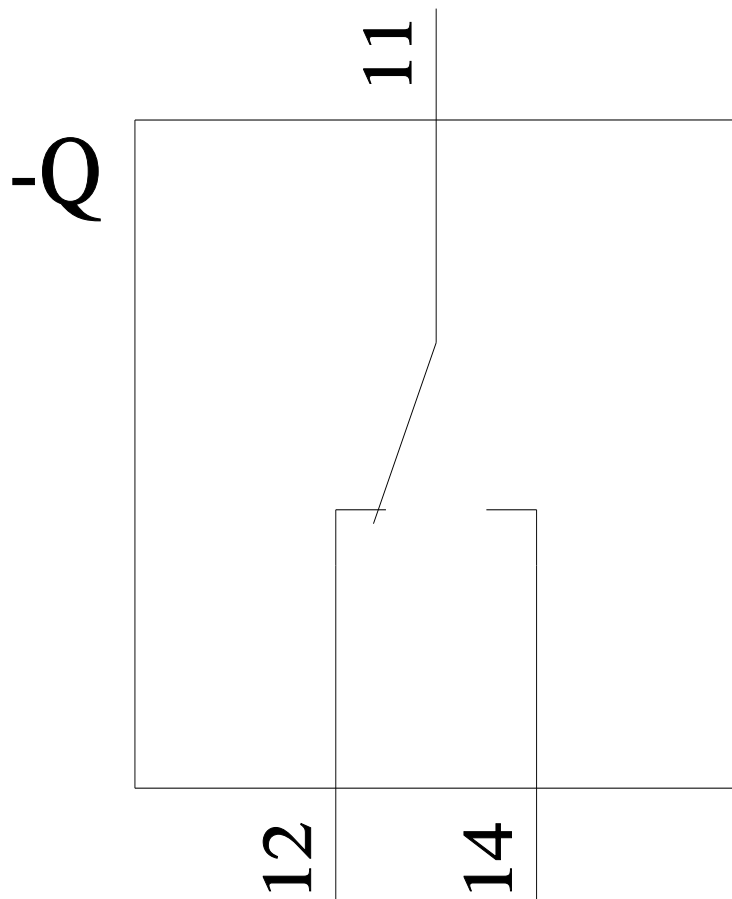

# -CR

