



Circuit breaker size S00 for motor protection, CLASS 10 A-release 4.5...6.3 A N-release 82 A Screw terminal Standard switching capacity

|   |                      |
|---|----------------------|
| <b>product brand name</b>   | SIRIUS               |
| <b>product designation</b>  | Circuit breaker      |
| <b>design of the product</b>  | For motor protection |
| <b>product type designation</b>   | 3RV1                 |
| <b>General technical data</b>   |                      |
| <b>Product equipment of circuit breaker for motor protection complete unit with protection device</b> | Yes                  |
| <b>size of the circuit-breaker</b>  | S00                  |
| <b>size of contactor can be combined company-specific</b>   | S00                  |
| product function disconnecter functionality   | Yes                  |
| product extension auxiliary switch  | Yes                  |
| <b>power loss [W] for rated value of the current</b>  |                      |
| • at AC in hot operating state  | 7.25 W               |
| • at AC in hot operating state per pole   | 2.4 W                |
| <b>type of calculation of power loss current-dependent</b>  | quadratic            |
| insulation voltage with degree of pollution 3 at AC rated value                                       | 690 V                |
| <b>surge voltage resistance rated value</b>   | 6 kV                 |
| <b>maximum permissible voltage for protective separation</b>  |                      |
| • in networks with ungrounded star point between main and auxiliary circuit                           | 400 V                |
| • in networks with grounded star point between main and auxiliary circuit                             | 400 V                |
| <b>protection class IP</b>  |                      |
| • on the front according to IEC 60529   | IP20                 |
| • on the front  | IP20                 |
| • of the terminal   | IP00                 |
| <b>mechanical service life (operating cycles)</b>   |                      |
| • of the main contacts typical  | 100 000              |
| • of auxiliary contacts typical   | 100 000              |
| electrical endurance (operating cycles) typical   | 100 000              |
| <b>reference code according to IEC 81346-2</b>  | Q                    |
| <b>continuous current rated value</b>   | 6.3 A                |
| <b>Substance Prohibitance (day/month/year)</b>  | 01/01/2013           |
| <b>Net Weight</b>   | 283 g                |
| <b>Ambient conditions</b>   |                      |
| installation altitude at height above sea level maximum   | 2 000 m              |
| <b>ambient temperature</b>  |                      |
| • during operation  | -20 ... +60 °C       |
| • during storage  | -50 ... +80 °C       |
| • during transport  | -50 ... +80 °C       |

|  |                |
|--|----------------|
| <b>temperature compensation</b>  | -20 ... +60 °C |
| relative humidity during operation   | 10 ... 95 %    |
| <b>Main circuit</b>  |                |
| <b>number of poles for main current circuit</b>  | 3              |
| <b>adjustable current response value current of the current-dependent overload release</b> | 4.5 ... 6.3 A  |
| <b>type of voltage for main current circuit</b>  | AC             |
| <b>operating voltage</b>   |                |
| • rated value  | 690 V          |
| • rated value  | 20 ... 690 V   |
| • at AC-3 rated value maximum  | 690 V          |
| • at AC-3e rated value maximum   | 690 V          |
| <b>operating frequency rated value</b>   | 50 ... 60 Hz   |
| <b>operational current rated value</b>   | 6.3 A          |
| <b>operational current</b>   |                |
| • at AC-3 at 400 V rated value   | 6.3 A          |
| • at AC-3e at 400 V rated value  | 6.3 A          |
| <b>operating power</b>   |                |
| • at AC-3  |                |
| — at 230 V rated value   | 1.5 kW         |
| — at 400 V rated value   | 2.2 kW         |
| — at 500 V rated value   | 3 kW           |
| — at 690 V rated value   | 4 kW           |
| • at AC-3e   |                |
| — at 230 V rated value   | 1.5 kW         |
| — at 400 V rated value   | 2.2 kW         |
| — at 500 V rated value   | 3 kW           |
| — at 690 V rated value   | 4 kW           |
| <b>operating frequency</b>   |                |
| • at AC-3 maximum  | 15 1/h         |
| • at AC-3e maximum   | 15 1/h         |
| <b>Auxiliary circuit</b>   |                |
| <b>type of voltage for auxiliary and control circuit</b>                                   | AC/DC          |
| <b>number of NC contacts for auxiliary contacts</b>  | 0              |
| <b>number of NO contacts for auxiliary contacts</b>  | 0              |
| number of CO contacts for auxiliary contacts   | 0              |
| <b>Protective and monitoring functions</b>   |                |
| <b>product function</b>  |                |
| • ground fault detection   | No             |
| • phase failure detection  | Yes            |
| <b>trip class</b>  | CLASS 10       |
| <b>design of the overload release</b>  | thermal        |
| <b>protection function thermal overload protection (ANSI 49)</b>                           | Yes            |
| <b>maximum short-circuit current breaking capacity (Icu)</b>                               |                |
| • at AC at 240 V rated value   | 100 kA         |
| • at AC at 400 V rated value   | 100 kA         |
| • at AC at 500 V rated value   | 3 kA           |
| • at AC at 690 V rated value   | 2 kA           |
| <b>operating short-circuit current breaking capacity (Ics) at AC</b>                       |                |
| • at 240 V rated value   | 100 kA         |
| • at 400 V rated value   | 100 kA         |
| • at 500 V rated value   | 3 kA           |
| • at 690 V rated value   | 2 kA           |
| response value current of instantaneous short-circuit trip unit                            | 82 A           |
| <b>UL/CSA ratings</b>  |                |
| <b>full-load current (FLA) for 3-phase AC motor</b>  |                |
| • at 480 V rated value   | 6.3 A          |
| • at 600 V rated value   | 6.3 A          |
| <b>yielded mechanical performance [hp]</b>   |                |

|  |   |
|--|---|
| <ul style="list-style-type: none"> <li>• for single-phase AC motor <ul style="list-style-type: none"> <li>— at 110/120 V rated value</li> <li>— at 230 V rated value</li> </ul> </li> <li>• for 3-phase AC motor <ul style="list-style-type: none"> <li>— at 200/208 V rated value</li> <li>— at 220/230 V rated value</li> <li>— at 460/480 V rated value</li> <li>— at 575/600 V rated value</li> </ul> </li> </ul>  | <p>0.25 hp</p> <p>0.5 hp</p> <p>1 hp</p> <p>1.5 hp</p> <p>3 hp</p> <p>5 hp</p>  |
| <b>Short-circuit protection</b>  |   |
| <b>product function short circuit protection</b>   | Yes   |
| <b>design of the short-circuit trip</b>  | magnetic  |
| <b>design of the fuse link for IT network for short-circuit protection of the main circuit</b>   |   |
| <ul style="list-style-type: none"> <li>• at 240 V</li> <li>• at 400 V</li> <li>• at 500 V</li> <li>• at 690 V</li> </ul>   | <p>none required</p> <p>gG 50 A</p> <p>gG 40 A</p> <p>gG 40 A</p>   |
| certificate of suitability according to ATEX directive 2014/34/EU  | DMT 02 ATEX F 001   |
| <b>type of protection according to ATEX directive 2014/34/EU</b>   | Ex II (2) GD  |
| <b>Installation/ mounting/ dimensions</b>  |   |
| <b>mounting position</b>   | any   |
| <b>fastening method</b>  | screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715  |
| <b>Mounting method of circuit breaker for Transformer protection, Generator protection and system protection optional standard bar mounting</b>  | Yes   |
| <b>height</b>  | 90 mm   |
| <b>width</b>   | 45 mm   |
| <b>depth</b>   | 75 mm   |
| <b>required spacing</b>  |   |
| <ul style="list-style-type: none"> <li>• for grounded parts at 400 V <ul style="list-style-type: none"> <li>— downwards</li> <li>— upwards</li> <li>— at the side</li> </ul> </li> <li>• for live parts at 400 V <ul style="list-style-type: none"> <li>— downwards</li> <li>— upwards</li> <li>— at the side</li> </ul> </li> <li>• for grounded parts at 500 V <ul style="list-style-type: none"> <li>— downwards</li> <li>— upwards</li> <li>— at the side</li> </ul> </li> <li>• for live parts at 500 V <ul style="list-style-type: none"> <li>— downwards</li> <li>— upwards</li> <li>— at the side</li> </ul> </li> <li>• for grounded parts at 690 V <ul style="list-style-type: none"> <li>— downwards</li> <li>— upwards</li> <li>— backwards</li> <li>— at the side</li> <li>— forwards</li> </ul> </li> <li>• for live parts at 690 V <ul style="list-style-type: none"> <li>— downwards</li> <li>— upwards</li> <li>— backwards</li> <li>— at the side</li> <li>— forwards</li> </ul> </li> </ul> | <p>20 mm</p> <p>20 mm</p> <p>9 mm</p> <p>20 mm</p> <p>20 mm</p> <p>9 mm</p> <p>20 mm</p> <p>20 mm</p> <p>9 mm</p> <p>20 mm</p> <p>20 mm</p> <p>0 mm</p> <p>9 mm</p> <p>0 mm</p> <p>20 mm</p> <p>20 mm</p> <p>0 mm</p> <p>9 mm</p> <p>0 mm</p> |
| <b>Connections/ Terminals</b>  |   |
| <b>product component removable terminal for auxiliary and control circuit</b>  | No  |

|   |   |
|---|---|
| <b>type of electrical connection</b><br>• for main current circuit  | screw-type terminals  |
| <b>arrangement of electrical connectors for main current circuit</b>  | Top and bottom  |
| <b>type of connectable conductor cross-sections</b><br>• for main contacts<br>— solid or stranded<br>— finely stranded with core end processing | 2x (0,5 ... 1,5 mm <sup>2</sup> ), 2x (0,75 ... 2,5 mm <sup>2</sup> ), 2x (1 ... 4 mm <sup>2</sup> )<br>2x (0.5 ... 1.5 mm <sup>2</sup> ), 2x (0.75 ... 2.5 mm <sup>2</sup> ) |
| <b>connectable conductor cross-section for main contacts</b><br>• solid or stranded<br>• finely stranded with core end processing               | 0.5 ... 4 mm <sup>2</sup><br>0.5 ... 2.5 mm <sup>2</sup>  |
| <b>type of connectable conductor cross-sections</b><br>• for auxiliary contacts<br>— solid or stranded  | 2x (0.5 ... 1.5 mm <sup>2</sup> ), 2x (0.75 ... 2.5 mm <sup>2</sup> )   |
| <b>AWG number as coded connectable conductor cross section for main contacts</b>  | 18 ... 14   |
| <b>tightening torque</b><br>• for main contacts with screw-type terminals<br>• for auxiliary contacts with screw-type terminals                 | 0.8 ... 1.2 N·m<br>0.8 ... 1.2 N·m  |
| <b>design of screwdriver shaft</b>  | Diameter 5 to 6 mm  |
| <b>size of the screwdriver tip</b>  | Pozidriv size 2   |
| <b>design of the thread of the connection screw</b><br>• for main contacts  | M3  |

#### Safety related data

|  |              |
|--|--------------|
| product function suitable for safety function  | Yes          |
| <b>suitability for use</b><br>• safety-related switching on<br>• safety-related switching OFF  | No<br>Yes    |
| <b>service life maximum</b>  | 10 a         |
| <b>test wear-related service life necessary</b>  | Yes          |
| <b>proportion of dangerous failures</b><br>• with low demand rate according to SN 31920<br>• with high demand rate according to SN 31920 | 40 %<br>50 % |
| <b>B10 value with high demand rate according to SN 31920</b>   | 5 000        |
| <b>failure rate [FIT] with low demand rate according to SN 31920</b>   | 50 FIT       |

#### ISO 13849

|  |     |
|--|-----|
| <b>device type according to ISO 13849-1</b>                | 3   |
| <b>overdimensioning according to ISO 13849-2 necessary</b> | Yes |

#### IEC 61508

|  |        |
|--|--------|
| <b>safety device type according to IEC 61508-2</b> | Type A |
|--|--------|

#### Electrical Safety

|  |  |
|--|--|
| <b>protection class IP on the front according to IEC 60529</b> | IP20   |
| <b>touch protection on the front according to IEC 60529</b>    | finger-safe, for vertical contact from the front |

#### Display

|                                      |               |
|--------------------------------------|---------------|
| display version for switching status | Rocker switch |
|--------------------------------------|---------------|

#### Approvals Certificates

|             |                          |
|-------------|--------------------------|
| Environment | General Product Approval |
|-------------|--------------------------|

[Environmental Conformations](#)



|                          |                                |                   |
|--------------------------|--------------------------------|-------------------|
| General Product Approval | For use in hazardous locations | Test Certificates |
|--------------------------|--------------------------------|-------------------|



[Type Test Certificates/Test Report](#)

[Special Test Certificate](#)

Maritime application



other

[Miscellaneous](#)

[Confirmation](#)

[Miscellaneous](#)



Railway

[Special Test Certificate](#)

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RV1011-1GA10>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RV1011-1GA10>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


[https://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RV1011-1GA10&lang=en](https://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RV1011-1GA10&lang=en)

Cax online generator

<https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RV1011-1GA10>

Characteristic curves

[https://curves.simaris.siemens.com/curves/<mmp\\_prod\\_noCOMP='HAUPT'></mmp\\_prod\\_no>](https://curves.simaris.siemens.com/curves/<mmp_prod_noCOMP='HAUPT'></mmp_prod_no>)

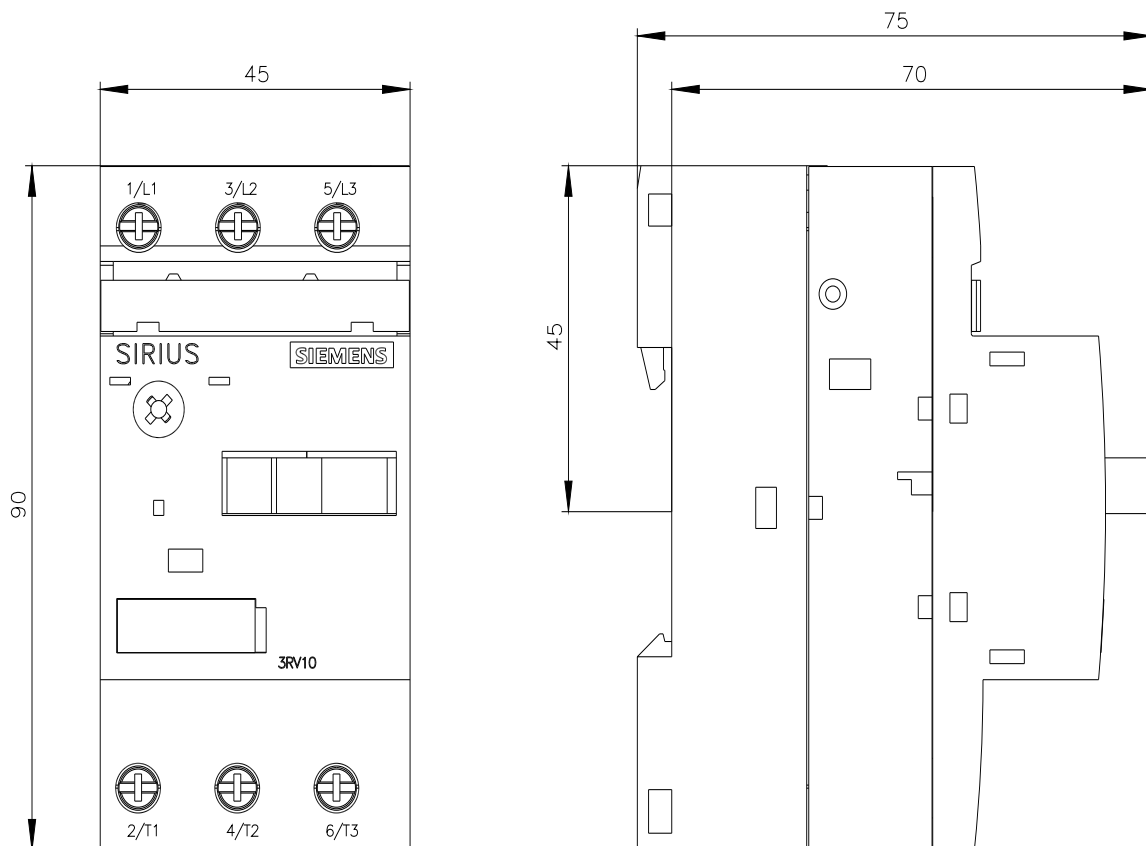



last modified:

5/5/2026 